


Job Name:


Type:

## Specification Grade 2-Circuit 120-Volt Track (2-HOT, 2-NEUTRAL)

### Track Section



### Recessed Jacket

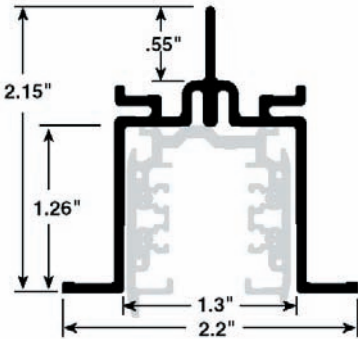


Track Section	
4 ft.	TS 4
8 ft.	TS 8
12 ft.	TS 12


Recessed Jacket (requires track section)	
4 ft.	FTP 44
8 ft.	FTP 48
12 ft.	FTP 412

Add suffix B-Black, W-White, 1-Natural.  
Custom lengths available. Please consult factory.


### Components (Add suffix B-Black, W-White, S-Silver.)



**TEK 11**  
**TEK 12 (mirror)**  
**End Feed**  
Used when energizing track from an outlet box or conduit feed.




**TEK 39 (right)**  
**TEK 40 (left)**  
**T Connector/Feed**  
Used to join three sections of track in a "T" configuration. May be used as a feed point.




**TEK11CB**  
**Live End with Power Limiter**


TEK11CB-1	120W / 1A
TEK11CB-2	300W / 2.5A
TEK11CB-5	600W / 5A
TEK11CB-7	900W / 7.5A




**TEK 38**  
**X Connector/Feed**  
Used to join four sections of track together in an "X" configuration. May be used as a feed point.



**TEK 14**  
**Center Feed**  
Used to join two sections of track together in a straight line. May be used as a feed point.




**XTSA 41 (track section)**  
**FTP 41 (recessed jacket)**  
**End Caps**  
Used to end any open configuration of track.



**XTSA 21**  
**Straight Connector**  
Used to join two sections of track together in a straight line.




**GES 15**  
**J-Box Cover**  
Used to cover an outlet box.



**TEK 24**  
**Adjustable L Connector**  
Used to join two sections of track together to create angles between 60° and 300°.



**XTSAJ 10**  
**Conduit Adapter**  
Used to attached power to any live feed.



**TEK 34**  
**L Connector/Feed**  
Used to join two sections of track together at a 90° angle. May be used as a feed point.




**XTSV 12**  
**Bending Tool**  
Used after field cutting to bend the conductor ends to a 90° angle. Use the opposite end of the tool to measure the correct position of the bent conductors.


## Polarity Diagrams

The track is polarized and therefore direction sensitive. There is a raised ridge (indicated by the thick black line) on one side of the track to ensure a proper connection. Please follow these diagrams to help aid you in your selection of connectors.

### Ridge Outside of Grid

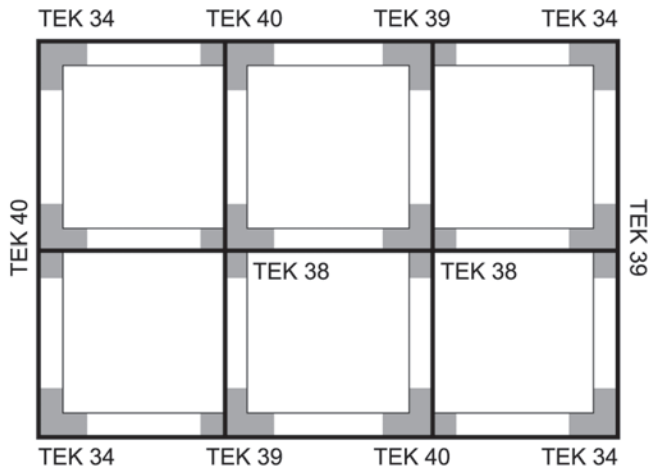



### Ridge Inside of Grid

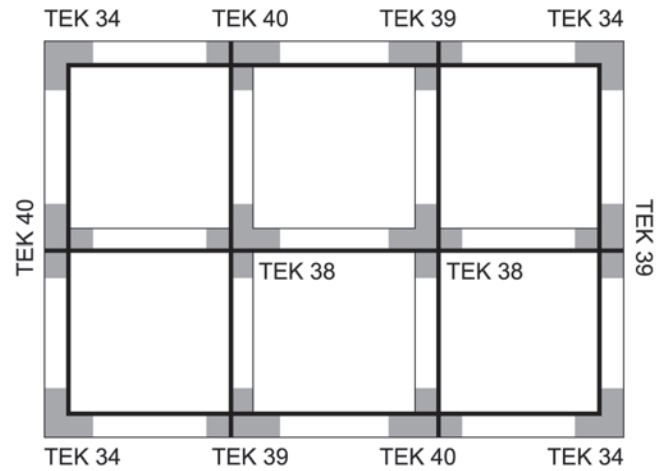


## Pendant Mount *(Add suffix B-Black, W-White, S-Silver.)*

3/8" Stem and canopy kit for mechanical and electrical suspension.


- 12 in. SPUS 12
- 18 in. SPUS 18
- 24 in. SPUS 24
- 36 in. SPUS 36
- 48 in. SPUS 48
- Custom lengths available.




**SP 4E**  
End feed suspension bracket for mechanical and electrical connection to the track.




**SP 4P**  
Point suspension bracket for mechanical connection to the track.




**SP 4I**  
Center feed suspension bracket for mechanical and electrical connection to the track.



**SP 4L**  
"L" suspension bracket for mechanical and electrical connection to the track.



**SP 4T**  
"T" suspension bracket for mechanical and electrical connection to the track.



**SP 4X**  
"X" suspension bracket for mechanical and electrical connection to the track.

## Cable Kit w/Canopy

*(Add suffix B-Black, W-White)*

- 24 in. CG 24
- 48 in. CG 48
- 72 in. CG 72
- Custom lengths available.



## Monopoint Canopy

*(Add suffix B-Black, W-White)*

XTSA70



## Power Outlet Adapter

*(Add suffix B-Black, W-White)*

TEK67

