


Job Name:


Type:

Specification Grade 3-Circuit 120-Volt Track (3-HOT, 1-NEUTRAL)

Track Section



Recessed Jacket

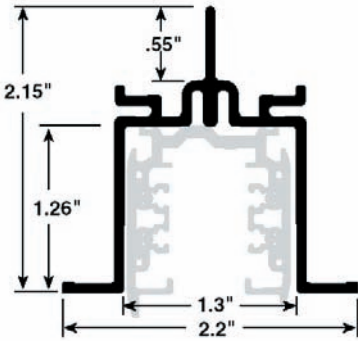

Track Section


4 ft.	XTS 44
8 ft.	XTS 48
12 ft.	XTS 412

Recessed Jacket (requires track section)

4 ft.	FTP 44
8 ft.	FTP 48
12 ft.	FTP 412

Add suffix B-Black, W-White, 1-Natural.
Custom lengths available. Please consult factory.

Components (Add suffix B-Black, W-White, S-Silver.)




**XTSV 12
Bending Tool**
Used after field cutting to bend the conductor ends to a 90° angle. Use the opposite end of the tool to measure the correct position of the bent conductors.




**XTSAJ 10
Conduit Adapter**
Used to attached power to any live feed.




**GES 15
J-Box Cover**
Used to cover an outlet box.




**XTSA 41 (track section)
FTP 41 (recessed jacket)
End Caps**
Used to end any open configuration of track.




**XTSA 21
Straight Connector**
Used to join two sections of track together in a straight line.




**XTSA 34
L Connector/Feed**
Used to join two sections of track together at a 90° angle. May be used as a feed point.




**XTSA 14
Center Feed**
Used to join two sections of track together in a straight line. May be used as a feed point.




**XTSA 24
Adjustable L Connector**
Used to join two sections of track together to create angles between 60° and 300°.



**XTSA 39 (right)
XTSA 40 (left)
T Connector/Feed**
Used to join three sections of track in a "T" configuration. May be used as a feed point.



**XTSA 38
X Connector/Feed**
Used to join four sections of track together in an "X" configuration. May be used as a feed point.




**XTSA 11
XTSA 12 (mirror)
End Feed**
Used when energizing track from an outlet box or conduit feed.

Last updated 11/24/2010.


Polarity Diagrams

The track is polarized and therefore direction sensitive. There is a raised ridge (indicated by the thick black line) on one side of the track to ensure a proper connection. Please follow these diagrams to help aid you in your selection of connectors.

Ridge Outside of Grid

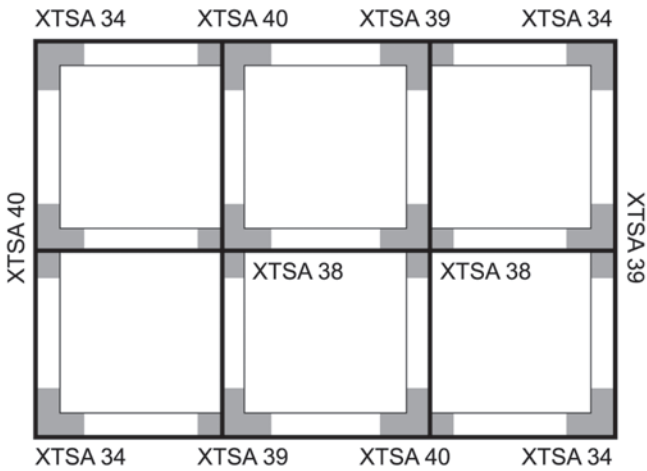



Ridge Inside of Grid

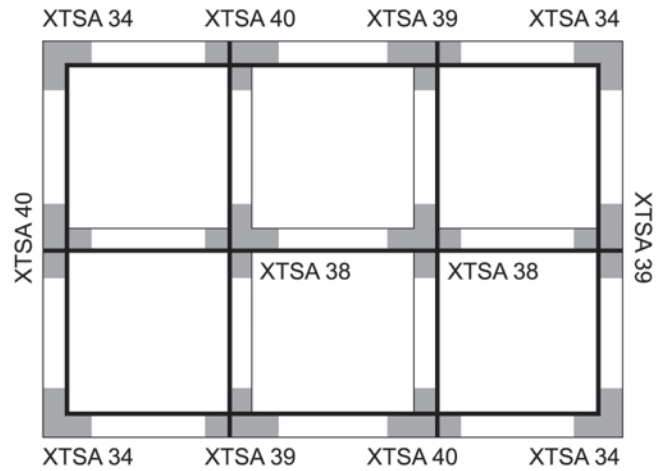


Pendant Mount (Add suffix B-Black, W-White, S-Silver.)

3/8" Stem and canopy kit for mechanical and electrical suspension.


- 12 in. SPUS 12
- 18 in. SPUS 18
- 24 in. SPUS 24
- 36 in. SPUS 36
- 48 in. SPUS 48
- Custom lengths available.




SP 4E
End feed suspension bracket for mechanical and electrical connection to the track.




SP 4I
Center feed suspension bracket for mechanical and electrical connection to the track.




SP 4T
"T" suspension bracket for mechanical and electrical connection to the track.



SP 4P
Point suspension bracket for mechanical connection to the track.



SP 4L
"L" suspension bracket for mechanical and electrical connection to the track.



SP 4X
"X" suspension bracket for mechanical and electrical connection to the track.

Cable Kit w/Canopy

(Add suffix B-Black, W-White)


- 24 in. CG 24
- 48 in. CG 48
- 72 in. CG 72
- Custom lengths available.



Monopoint Canopy

(Add suffix B-Black, W-White)

XTSA70



Power Outlet Adapter

(Add suffix B-Black, W-White)

XTSA67

