

TW26P PENDANT

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The TW26P features high CRI output with tunable white from 1800K - 6500K. Interchangeable reflectors allow beam angles between 25° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

FEATURES

- 2000 Lumen Output
- 5 DMX Channels
- Tunable range: 1800K-6500K tunable white
- 84 - 95 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available

OPTICS

- 25°, 40° or 60° field-changeable reflectors

POWER

- Power Consumption: 31W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

WEIGHT

- 5 lbs.

CALIBRATED CCT SPECIFICATIONS

CCT [K]	TYPICAL CRI
1800 (min)	90
2700	93
3000	95
3500	95
4000	93
6500 (max)	84

TW26P PENDANT


TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW


PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY




WITH DXTC CANOPY

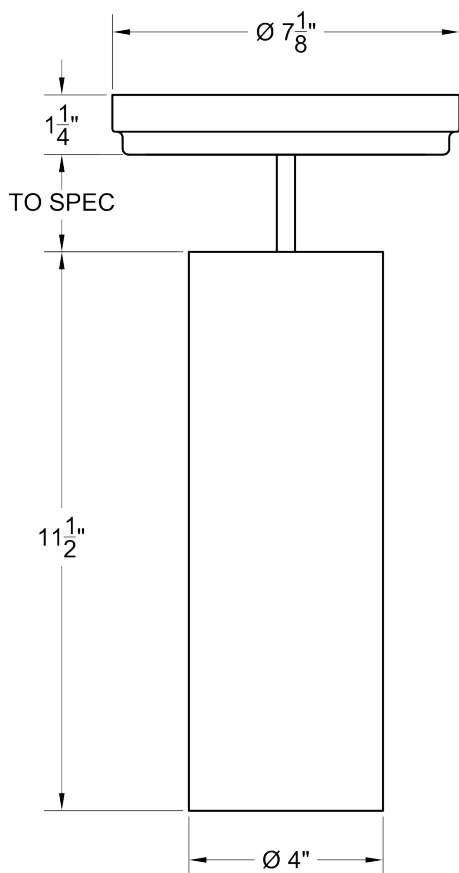

WITH LOW PROFILE
LP2 TRACK ADAPTER

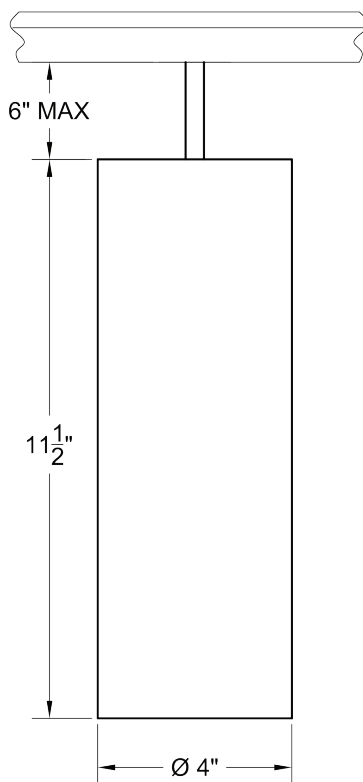

WITH STANDARD
TRACK ADAPTER

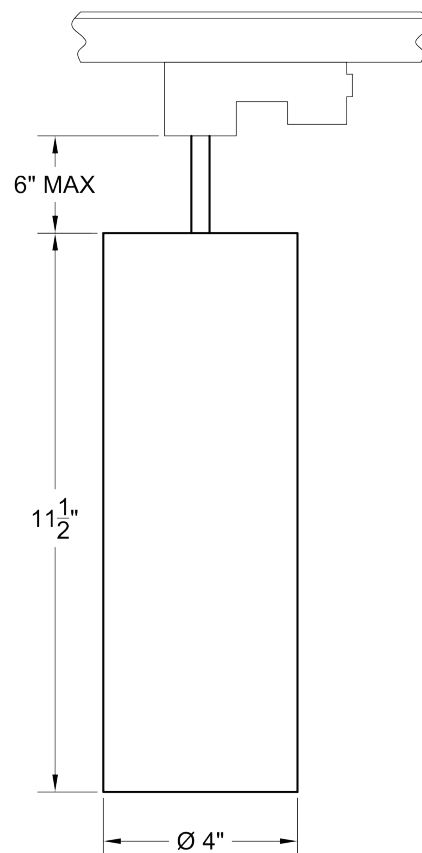

MOUNTING OPTIONS	ACCESSORIES												
DT2 Track adapter for SpecTrack 2-Circuit data track. 120V. HDT2 Track adapter for SpecTrack 2-Circuit data track. 277V. DXTC Canopy mount with terminal block for DMX. (DMX stem mount only). GAC Track adapter for 120V global pulse track. CM4 Canopy mount (Casambi Wireless only).	<table> <tr> <td>X00517</td><td>Accessory Holder</td></tr> <tr> <td>LV18*</td><td>Honeycomb Louver</td></tr> <tr> <td>OF22-9101*</td><td>Smoothing Frost Filter</td></tr> <tr> <td>GF22-600*</td><td>5x50 Linear Lens</td></tr> <tr> <td>GF22-601*</td><td>Solite Softner</td></tr> <tr> <td>GF22-673*</td><td>50 x 50 Spread Lens</td></tr> </table> * X00517 Required, not compatible with 10° reflector option.	X00517	Accessory Holder	LV18*	Honeycomb Louver	OF22-9101*	Smoothing Frost Filter	GF22-600*	5x50 Linear Lens	GF22-601*	Solite Softner	GF22-673*	50 x 50 Spread Lens
X00517	Accessory Holder												
LV18*	Honeycomb Louver												
OF22-9101*	Smoothing Frost Filter												
GF22-600*	5x50 Linear Lens												
GF22-601*	Solite Softner												
GF22-673*	50 x 50 Spread Lens												
	NOTES ON DIMMING												

Visit tslight.com/resources or scan the QR Code.



TW26P PENDANT

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



SPECIFY:

MODEL	FINISH	OPTICS
PCT23	B = Black W = White S = Silver CC = Custom Color	25 = 25° Degree 40 = 40° Degree 60 = 60° Degree
MOUNTING	DIMMING	STEM LENGTH
See Mounting Options for Ordering Codes	DX = DMX / RDM CS = Casambi Wireless	SP12 = 12" Stem SP18 = 18" Stem SP24 = 24" Stem SPX = Custom Stem (in inches)

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: TW26P-B-60-DT2-DX

MODEL	FINISH	OPTICS	MOUNTING	DIMMING	STEM LENGTH
TW26P					