


TS-CO25

100W RGBW Mini Profile Spot

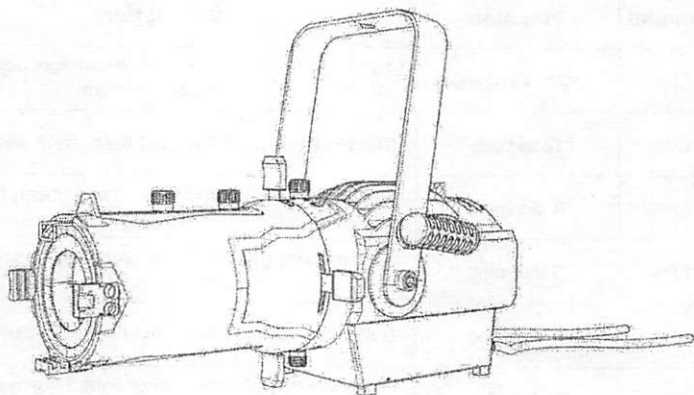

USER MANUAL

Menu Display

Display	Function	Parameter
d001	Dmx512 address code settings	0-255
r255	R brightness adjustment	0-255
G255	G brightness adjustment	0-255
b255	B brightness adjustment	0-255
H255	H brightness adjustment	0-255
Pr01	Built -in program settings	
SP01	Built -in program speed settings	0-16
AUTO	Self-propelled	
DP00/01	Display Settings Settings	
DISP	Display backward selection	
NT00	Light beads work display	Operating temperature

DMX 9CH

Channel	Function	Description
CH1	Main Dimming	(0-255) R, G, B, W always lit, linear light adjustment, from dark to bright
CH2	Total flash	(0-255) R, G, B, W The total flash, from slow to fast
CH3	R dimming	R dimming, (0-255) linear light adjustment, from dark to light
CH4	G dimming	G -dimming, (0-255) Linear light adjustment, from dark to light
CH5	B dimming	B lighting, (0-255) linear lighting, from dark to light
CH6	W dimming	W -dimension, (0-255) Linear light adjustment, from dark to light
CH7	Color Mix	Combination of color.
CH8	Macro function	(0-10) The first 7 channels enable; (11-120) jump; (121-180): Gradient; (181-255): jump, gradient.
CH9	Macro function speed	0-255 slower upward speed, 0 fastest speed.