

TW26S STUDIO

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The TW26S Studio features a high CRI output, with tunable white from 1800K - 6500K. Interchangeable reflectors allow beam angles between 25° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

FEATURES

- 2800 Lumen Output
- RDM Values Available: DTW, INT-CCT, CH1-CH2, CH1-CH2-CH3 *
- Tunable range: 1800K-6500K tunable white
- 94 - 97 CRI
- Dimmable from 100 - 0.1%.
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available
- DMX/RDM, 0-10V

* See User Manual.

POWER

- Power Consumption: 38W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

OPTICS

- 25°, 35°, 40°, 50°, 60°, & 25°- 45° zoom field-changeable reflectors.

WEIGHT

- 2 lbs.

CALIBRATED CCT SPECIFICATIONS


CCT [K]	TYPICAL CRI
1800 (min)	94
3000	96
3500	97
4000	96
6500 (max)	94

TW26S STUDIO

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

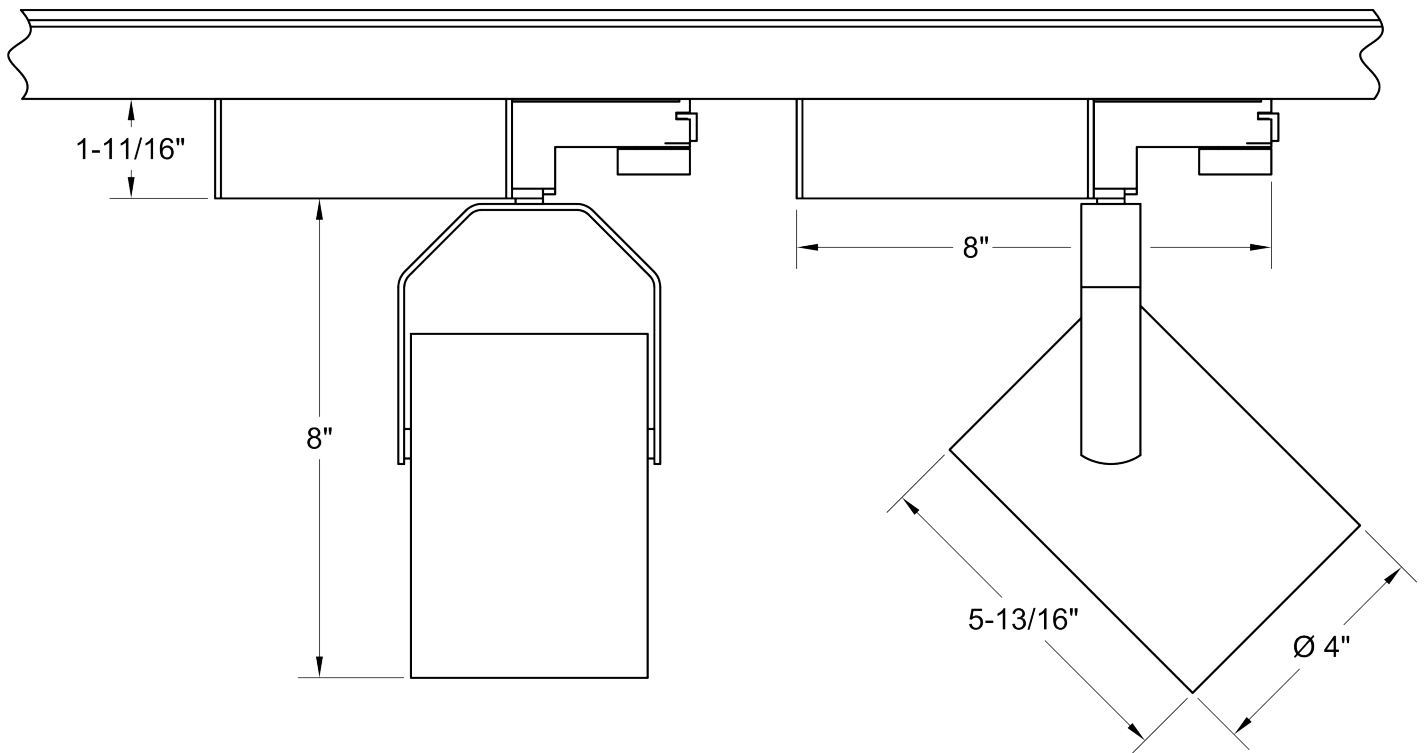

MOUNTING OPTIONS	ACCESSORIES																										
N8: for DT2 2-circuit track adapter for SpecTrac databus, 120V. N9: for HDT2 2-circuit track adapter for SpecTrac databus, 227V.	<table> <tr><td>BD20</td><td>Barndoor</td></tr> <tr><td>LV22</td><td>Full Size Louver</td></tr> <tr><td>XL22</td><td>Full Size X Baffle Louver</td></tr> <tr><td>XH22</td><td>Full Size X Baffle Hood</td></tr> <tr><td>HD22</td><td>Hood/Snoot</td></tr> <tr><td>XCY-AH</td><td>Accessory Holder</td></tr> <tr><td>LV18*</td><td>Honeycomb Louver</td></tr> <tr><td>GF22-600*</td><td>5x50 Linear Lens</td></tr> <tr><td>GF22-601*</td><td>Solite Softner</td></tr> <tr><td>GF22-673*</td><td>50 x 50 Spread Lens</td></tr> <tr><td>SC24</td><td>Safety Cable</td></tr> <tr><td>HADAR70WF</td><td>Frosted Beam Accessory</td></tr> <tr><td>HADAR70WA</td><td>Wall Wash Accessory</td></tr> </table> * XCY-AH Required	BD20	Barndoor	LV22	Full Size Louver	XL22	Full Size X Baffle Louver	XH22	Full Size X Baffle Hood	HD22	Hood/Snoot	XCY-AH	Accessory Holder	LV18*	Honeycomb Louver	GF22-600*	5x50 Linear Lens	GF22-601*	Solite Softner	GF22-673*	50 x 50 Spread Lens	SC24	Safety Cable	HADAR70WF	Frosted Beam Accessory	HADAR70WA	Wall Wash Accessory
BD20	Barndoor																										
LV22	Full Size Louver																										
XL22	Full Size X Baffle Louver																										
XH22	Full Size X Baffle Hood																										
HD22	Hood/Snoot																										
XCY-AH	Accessory Holder																										
LV18*	Honeycomb Louver																										
GF22-600*	5x50 Linear Lens																										
GF22-601*	Solite Softner																										
GF22-673*	50 x 50 Spread Lens																										
SC24	Safety Cable																										
HADAR70WF	Frosted Beam Accessory																										
HADAR70WA	Wall Wash Accessory																										
	NOTES ON DIMMING																										

Visit tslight.com/resources or scan the QR Code.



TW26S STUDIO

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



SPECIFY:

MODEL	FINISH	OPTICS
TW23S	B = Black W = White S = Silver CC = Custom Color	25 = 25° Degree 35 = 35° Degree 40 = 40° Degree 50 = 50° Degree 60 = 60° Degree ZO = 25° - 45° Degree
MOUNTING OPTIONS	DIMMING	COLOR TEMPERATURE **
See Mounting Options for Ordering Codes	DX = DMX / RDM CS = Casambi Wireless 010 = 0-10V *	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 56 = 5600K 65 = 6500K

* 0-10V only allows tuning. No dimming on track.

** Fixtures can be pre-programmed to static white with 1-channel DMX for non-tunable white applications.

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: TW26S-B-60-N8-DX-27

MODEL	FINISH	OPTICS	MOUNTING OPTIONS	DIMMING	COLOR TEMPERATURE
TW26S					