## **COLOR MIXING - TUNABLE WHITE**

MANUFACTURED IN THE UNITED STATES - IBEW











The Recessed Mosaic features tunable color with a high CRI output. It also features tunable white from 1800K - 6500K. Rich blues, ambers, reds, violets and greens can be added in gradients or can completely saturate the output of the light. Interchangeable reflectors allow beam angles between 10° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an architainment setting.

- 2000 Lumen Output
- 5 DMX Channels
- Color Tuning: RGB+ Intensity+ CCT •
- Tunable range: 1800K-6500K tunable white
- 84 95 CRI

- Dimmable from 100 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available

## **POWER**

- Power Consumption: 31W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

#### **OPTICS**

• 10°, 20°, 40° or 60° field-changeable reflectors

#### WEIGHT

2 lbs.

## **CALIBRATED CCT SPECIFICATIONS**

CCT [K]	TYPICAL CRI		
1800 (min)	90		
2700	93		
3000	95		
3500	95		
4000	93		
6500 (max)	84		

#### **FEATURES**

- Fixture is for remodel or new construction.
- ± 20 Aiming Angle.
- Fixture ships with RJ45 connectors
- and terminal blocks for data in/out.

# **EMITTER 5-YEAR WARRANTY**

The warranty on the LED Emitter used in this Times Square Lighting product shall have a five year warranty from the date of purchase.

# **COLOR MIXING - TUNABLE WHITE**


MANUFACTURED IN THE UNITED STATES - IBEW


PRODUCT LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY











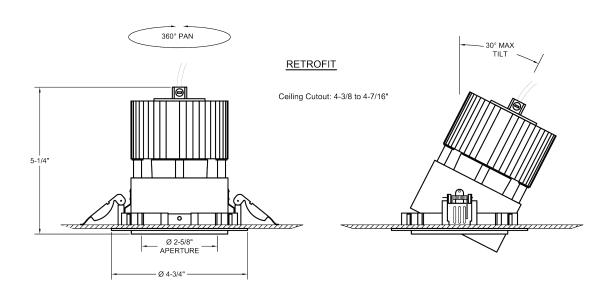

## **NEW CONSTRUCTION**

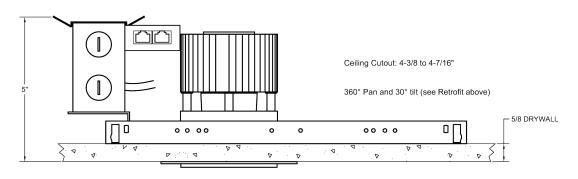



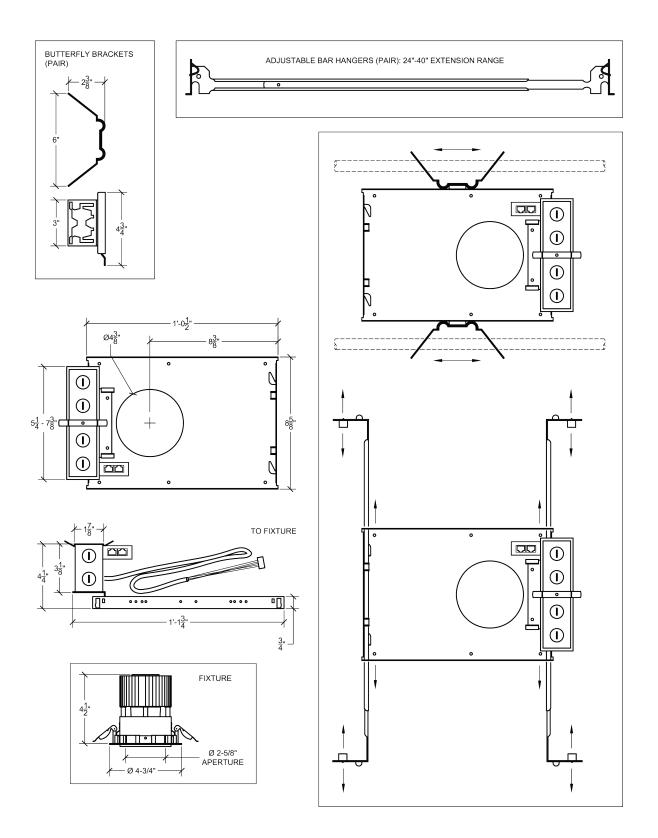

# **COLOR MIXING - TUNABLE WHITE**

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED BY A NATIONALLY RECOGNIZED TESTING LABORATORY







# PHOTOMETRIC DATA

20° Spot Reflector			40° Spot Reflector		
Distance	Beam Spread	Footcandles	Distance	Beam Spread	Footcandles
5′	1.7'	240	5′	3.6'	140
7.5′	2.7'	107	7.5′	5.5′	62
10′	3.6'	60	10′	7.3'	35
12.5′	4.4'	38	12.5′	9.1′	22

# 60° Spot Reflector

Distance	Beam Spread	Footcandles
5′	5.7'	80
7.5′	8.7'	36
10′	11.6′	20
12.5′	14.4'	13

# **COLOR MIXING - TUNABLE WHITE**

MANUFACTURED IN THE UNITED STATES - IBEW









# TIMES SQUARE LIGHTING

## **SPECIFY:**

MODEL	FINISH	OPTICS
FCT23	B = Black W = White S = Silver CC = Custom Color	20 = 20° Degree 40 = 40° Degree 60 = 60° Degree
MOUNTING	DIMMING	STEM LENGTH

<sup>†</sup> See installation instructions for more detail on New Construction option.

## **NOTES ON DIMMING**

Visit tslight.com/resources or scan the QR Code.



## **ORDERING INFORMATION**

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

#### **EXAMPLE:** FCT23-B-40-NC-DX-T

MODEL	FINISH	OPTICS	MOUNTING OPTIONS	CONTROL / DMX CONNECTOR
FCT23				