

ACT23P MOSAIC PAR

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The Mosaic PAR combines tunable color from 1800K to 6500K with high CRI output and passive cooling for silent operation in noise sensitive environments. Rich blues, ambers, reds, violets and greens can be added in gradients or can completely saturate the output of the light. Interchangeable reflectors allow beam angles between 25° and 60°. This fixture is perfect for noise sensitive environments such as studios, churches, museums and other quiet spaces.

FEATURES

- 2000 Lumen Output
- 5 DMX Channels
- Color Tuning: RGB+ Intensity+ CCT
- Tunable range: 1800K-6500K tunable white
- 84 - 95 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available
- Fanless (silent) operation

POWER

- Power Consumption: 31W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

OPTICS

- 25°, 35°, 40°, 50°, 60° or 25°-45° Zoom field-changeable reflectors

WEIGHT

- 2 lbs.

CALIBRATED CCT SPECIFICATIONS



CCT [K]	TYPICAL CRI
1800 (min)	90
2700	93
3000	95
3500	95
4000	93
6500 (max)	84

ACT23P MOSAIC PAR

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

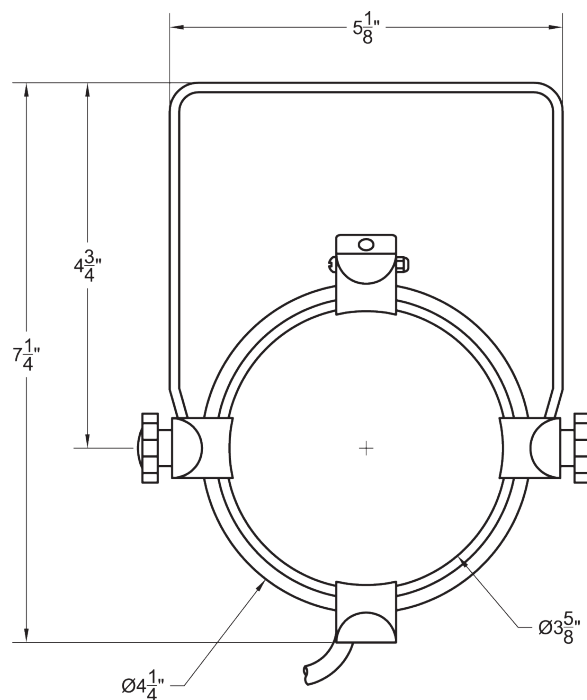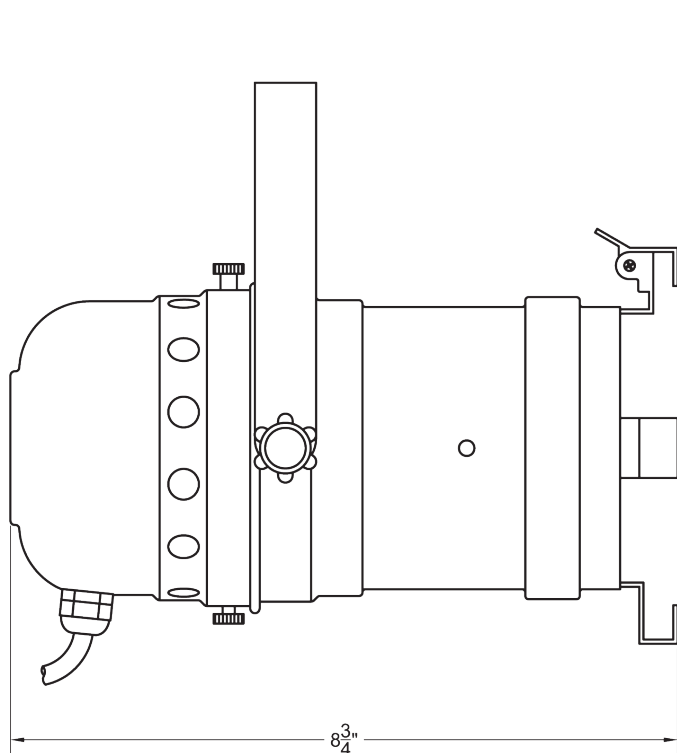

MOUNTING OPTIONS	ACCESSORIES
DT2 2-circuit track adapter for SpecTrac databus, 120V.	LV43 Louver
HDT2 2-circuit track adapter for SpecTrac databus, 277V.	BD43 Barndoor
LP2 Low profile 2-circuit track adapter for SpecTrack databus. 120V.	GF43-600 5°x50° Linear Lens
	GF43-601 Beam Softener
	GF43-673 50°x50° Spread Lens
	SC-24 Safety Cable
CM4 Canopy mount (Casambi Wireless only).	HADAR70WF Frosted Beam Accessory
	HADAR70WA Wall Wash Accessory
DXTC Canopy mount with terminal block for DMX.	
	NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



ACT23P MOSAIC PAR

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



SPECIFY:

MODEL	FINISH	OPTICS
ACT23P	B = Black W = White S = Silver CC = Custom Color	25 = 25° Degree 35 = 35° Degree 40 = 40° Degree 50 = 50° Degree 60 = 60° Degree ZO = 25° - 45° Zoom
MOUNTING OPTIONS		DIMMING
See Mounting Options for Ordering Codes		DX = DMX / RDM CS = Casambi Wireless

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: ACT23P-B-60-DT2-DX

MODEL	FINISH	OPTICS	MOUNTING OPTIONS	DIMMING