

TW26S STUDIO

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The TW26S Studio features a high CRI output, with tunable white from 1800K - 6500K. Interchangeable reflectors allow beam angles between 10° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

FEATURES

- 2800 Lumen Output
- RDM Values Available: DTW, INT-CCT, CH1-CH2, CH1-CH2-CH3 *
- Tunable range: 1800K-6500K tunable white
- 94 - 97 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available
- DMX/RDM, 0-10V

* See User Manual.

POWER

- Power Consumption: 38W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

OPTICS

- 10°, 20°, 40° or 60° field-changeable reflectors

WEIGHT

- 2 lbs.

CALIBRATED CCT SPECIFICATIONS

CCT [K]	TYPICAL CRI
1800 (min)	94
3000	96
3500	97
4000	96
6500 (max)	94

EMITTER 5-YEAR WARRANTY


The warranty on the LED Emitter used in this Times Square Lighting product shall have a five year warranty from the date of purchase.

TW26S STUDIO

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

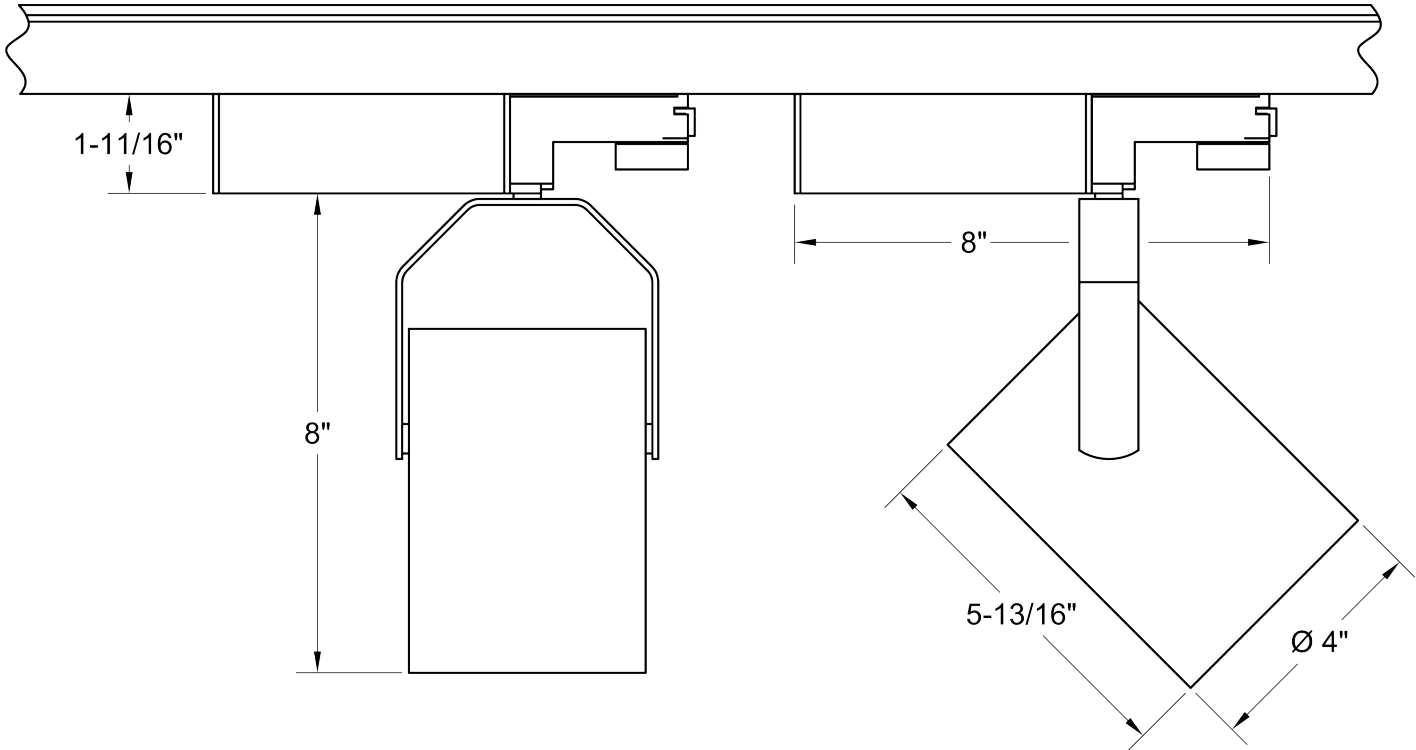


PHOTOMETRIC DATA

* Tested at 3000K.


10° Spot Reflector

Distance	Beam Spread	Footcandles
5'	11"	570
7.5'	1'4"	253
10'	1'9"	143
12.5'	2'2"	91




20° Spot Reflector

Distance	Beam Spread	Footcandles
5'	1'7"	241
7.5'	2'6"	107
10'	3'5"	60
12.5'	4'4"	39




40° Spot Reflector

Distance	Beam Spread	Footcandles
5'	3'6"	144
7.5'	5'5"	64
10'	7'3"	36
12.5'	9'1"	23



60° Spot Reflector

Distance	Beam Spread	Footcandles
5'	5'7"	85
7.5'	8'8"	37
10'	11'6"	21
12.5'	14'5"	13



TW26S STUDIO

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



MOUNTING OPTIONS

N8: for DT2 2-circuit track adapter for SpecTrac databus, 120V.

N9: for HDT2 2-circuit track adapter for SpecTrac databus, 227V.

ACCESSORIES

BD20	Barndoor
LV22	Full Size Louver
XL22	Full Size X Baffle Louver
XH22	Full Size X Baffle Hood
HD22	Hood/Snoot
X00517	Accessory Holder
LV18*	Honeycomb Louver
OF22-9101*	Smoothing Frost Filter
GF22-600*	5x50 Linear Lens
GF22-601*	Solite Softner
GF22-673*	50 x 50 Spread Lens
SC24	Safety Cable

* X00517 Required
Not compatible with 10° reflector option.

NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



SPECIFY:

MODEL	FINISH	OPTICS
TW23S	B = Black W = White S = Silver CC = Custom Color	10 = 10° Degree 20 = 20° Degree 40 = 40° Degree 60 = 60° Degree
MOUNTING OPTIONS	DIMMING	COLOR TEMPERATURE **
See Mounting Options for Ordering Codes	DX = DMX / RDM CS = Casambi Wireless 010 = 0-10V *	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 56 = 5600K 65 = 6500K

* 0-10V only allows tuning. No dimming on track.

** Fixtures can be pre-programmed to static white with 1-channel DMX for non-tunable white applications.

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: TW26S-B-60-N8-DX-27

MODEL	FINISH	OPTICS	MOUNTING OPTIONS	DIMMING	COLOR TEMPERATURE
TW26S					