

TW26 FLOOD

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



RoHS
2002/95/EC



The TW26 Flood features a high CRI output, with tunable white from 1800K - 6500K. Interchangeable reflectors allow beam angles between 10° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

FEATURES

- 2800 Lumen Output
- RDM Values Available: DTW, INT-CCT, CH1-CH2, CH1-CH2-CH3 *
- Tunable range: 1800K-6500K tunable white
- 94 - 97 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available
- DMX/RDM, 0-10V

* See User Manual.

POWER

- Power Consumption: 38W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

OPTICS

- 10°, 20°, 40° or 60° field-changeable reflectors

WEIGHT

- 2 lbs.

CALIBRATED CCT SPECIFICATIONS

CCT [K]	TYPICAL CRI
1800 (min)	94
3000	96
3500	97
4000	96
6500 (max)	94

EMITTER 5-YEAR WARRANTY

The warranty on the LED Emitter used in this Times Square Lighting product shall have a five year warranty from the date of purchase.

TW26 FLOOD


TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW


PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY




DXTC - CANOPY MOUNT WITH TERMINAL BLOCK FOR DMX

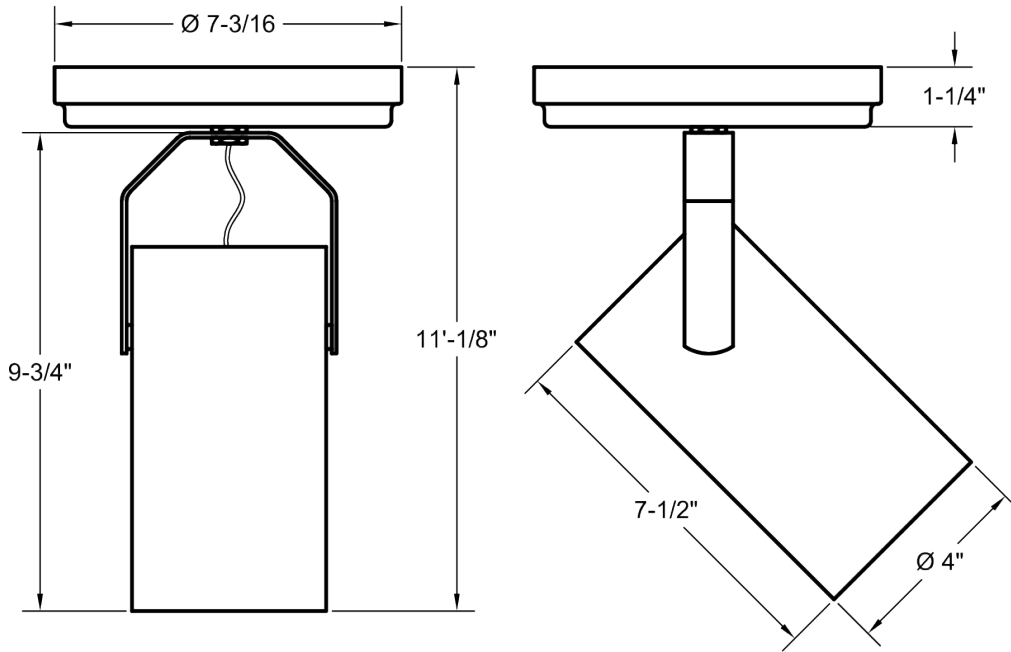


CM4 CANOPY MOUNT FOR CASAMBI WIRELESS

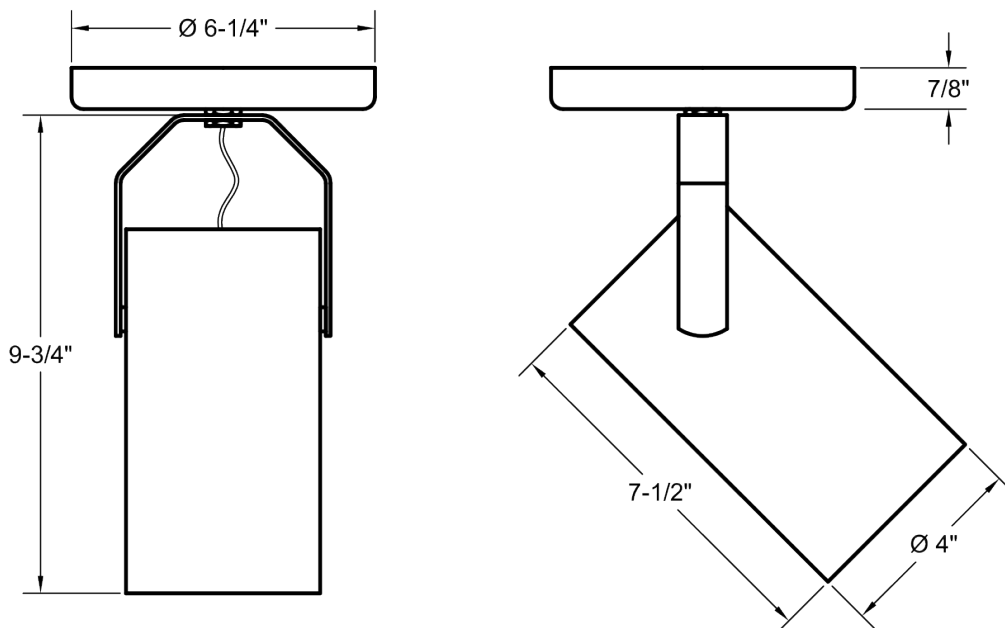

DT2, HDT2 AND GAC TRACK ADAPTERS FOR DMX OR CASAMBI WIRELESS

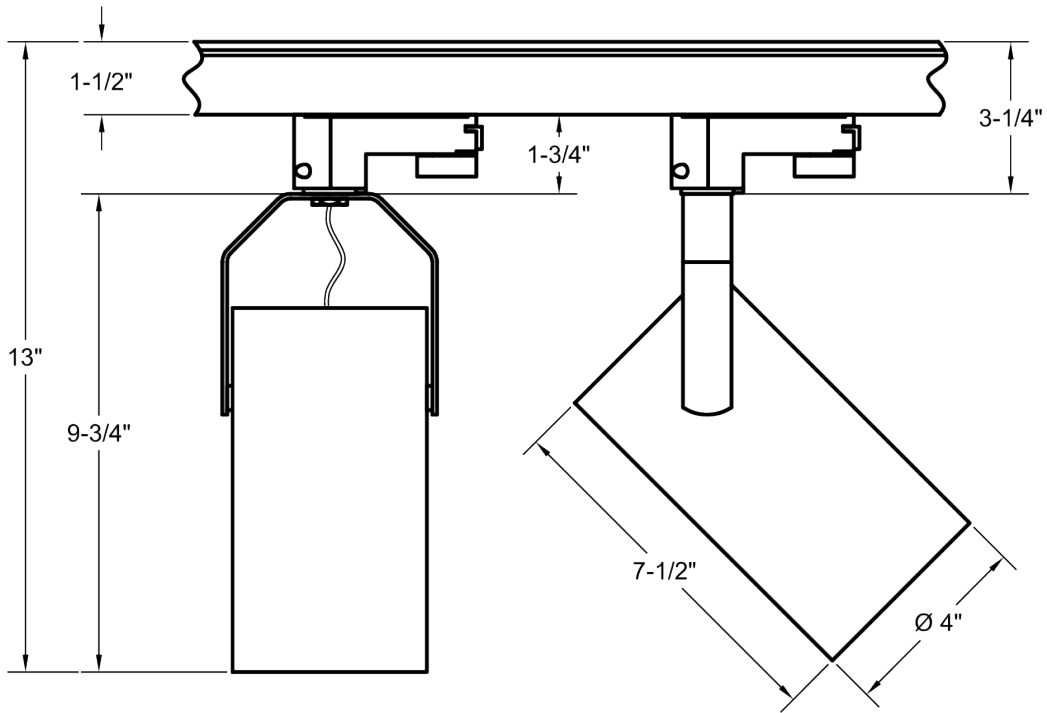

US1, TB8 OR CLAMP MOUNT WITH POWER CORD (NOT SHOWN) FOR CASAMBI WIRELESS OR DMX. TWO RJ45 JACKS PROVIDED WITH DMX VERSION ONLY

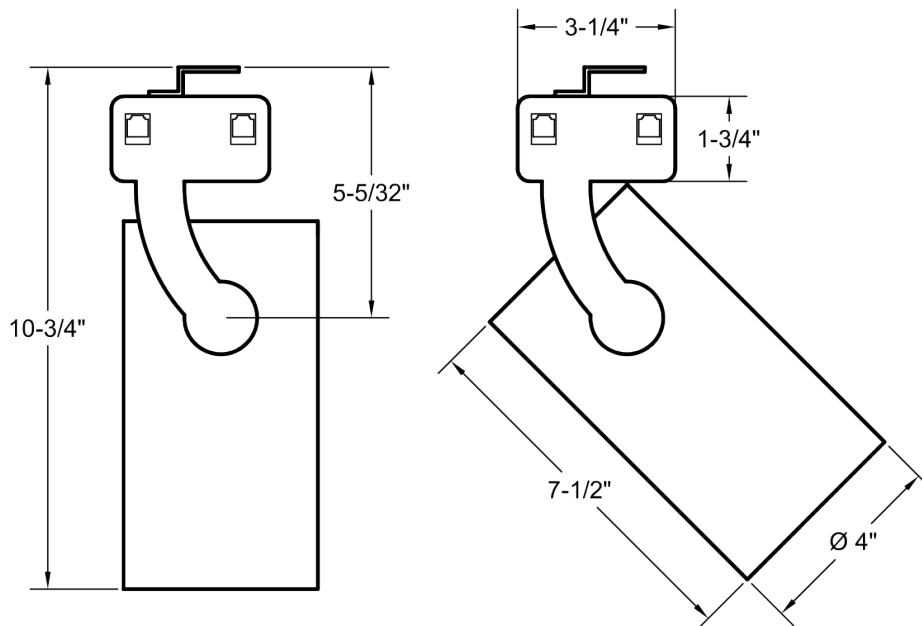

TW26 FLOOD

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY




PHOTOMETRIC DATA

* Tested at 3000K.


10° Spot Reflector

Distance	Beam Spread	Footcandles
5'	11"	570
7.5'	1'4"	253
10'	1'9"	143
12.5'	2'2"	91




20° Spot Reflector

Distance	Beam Spread	Footcandles
5'	1'7"	241
7.5'	2'6"	107
10'	3'5"	60
12.5'	4'4"	39




40° Spot Reflector

Distance	Beam Spread	Footcandles
5'	3'6"	144
7.5'	5'5"	64
10'	7'3"	36
12.5'	9'1"	23



60° Spot Reflector

Distance	Beam Spread	Footcandles
5'	5'7"	85
7.5'	8'8"	37
10'	11'6"	21
12.5'	14'5"	13



MOUNTING OPTIONS

- DT2** 2-circuit track adapter for SpecTrac databus, 120V.
- HDT2** 2-circuit track adapter for SpecTrac databus, 277V.
- DXTC** Canopy mount with terminal block for DMX.
- GAC** Track adapter for 120V global pulse track.
- CM4** Canopy mount (Casambi Wireless only).
- US1** 6 5/8" x 1 1/2" Unistrut Adapter (Casambi Wireless only).
- TB8** 8" x 8" Portable table base for floor and table use (Casambi Wireless only).
- MC** Light duty pipe clamp for small fixtures. For pipes up to 1 5/16" O.D. (Casambi Wireless only).
- MN** Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D. (Casambi Wireless only).
- PC9M** Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D. (Casambi Wireless only).

ACCESSORIES

BD20	Barndoor
LV22	Full Size Louver
XL22	Full Size X Baffle Louver
XH22	Full Size X Baffle Hood
HD22	Hood/Snoot
X00517	Accessory Holder
LV18*	Honeycomb Louver
OF22-9101*	Smoothing Frost Filter
GF22-600*	5x50 Linear Lens
GF22-601*	Solite Softner
GF22-673*	50 x 50 Spread Lens
SC24	Safety Cable

* X00517 Required
Not compatible with 10° reflector option.

EXTENSION WANDS

SP 12	12" Stem
SP 18	18" Stem
SP 24	24" Stem
SP X	Custom Length

NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



TW26 FLOOD

TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



SPECIFY:

MODEL	FINISH	OPTICS
TW26	B = Black W = White S = Silver CC = Custom Color	10 = 10° Degree 20 = 20° Degree 40 = 40° Degree 60 = 60° Degree
MOUNTING OPTIONS	DIMMING	COLOR TEMPERATURE **
See Mounting Options for Ordering Codes	DX = DMX / RDM CS = Casambi Wireless 010 = 0-10V *	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 56 = 5600K 65 = 6500K

* 0-10V only allows tuning. No dimming on track.

** Fixtures can be pre-programmed to static white with 1-channel DMX for non-tunable white applications.

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: TW26-B-60-DT2-DX-27

MODEL	FINISH	OPTICS	MOUNTING	DIMMING	COLOR TEMPERATURE
TW26					