

PCT23 MOSAIC PENDANT

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The Mosaic Pendant pairs tunable color from 1800K - 6500K with high CRI output. Rich blues, ambers, reds, violets and greens can be added in gradients or can completely saturate the output of the light. Interchangeable reflectors allow beam angles between 25° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

FEATURES

- 2000 Lumen Output
- 5 DMX Channels
- Color Tuning: RGB+ Intensity+ CCT
- Tunable range: 1800K-6500K tunable white
- 84 - 95 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available

POWER

- Power Consumption: 31W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

OPTICS

- 25°, 40° or 60° field-changeable reflectors

WEIGHT

- 5 lbs.

CALIBRATED CCT SPECIFICATIONS

CCT [K]	TYPICAL CRI
1800 (min)	90
2700	93
3000	95
3500	95
4000	93
6500 (max)	84

PCT23 MOSAIC PENDANT


COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW


PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY




WITH DXTC CANOPY

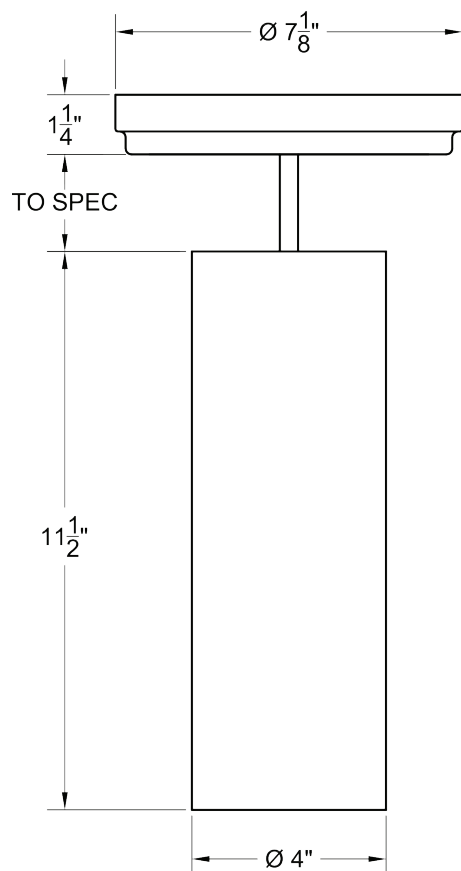

WITH LOW PROFILE
LP2 TRACK ADAPTER

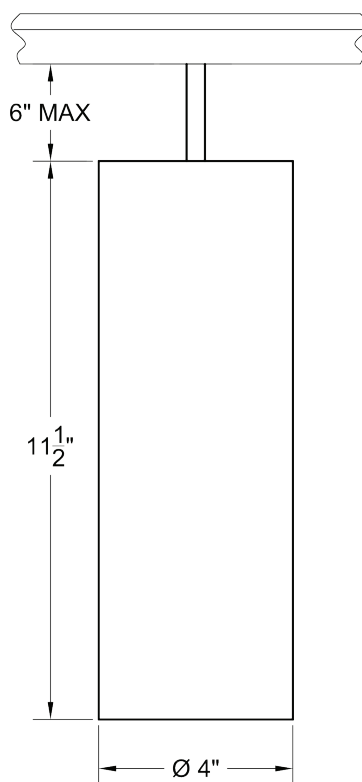

WITH STANDARD
TRACK ADAPTER

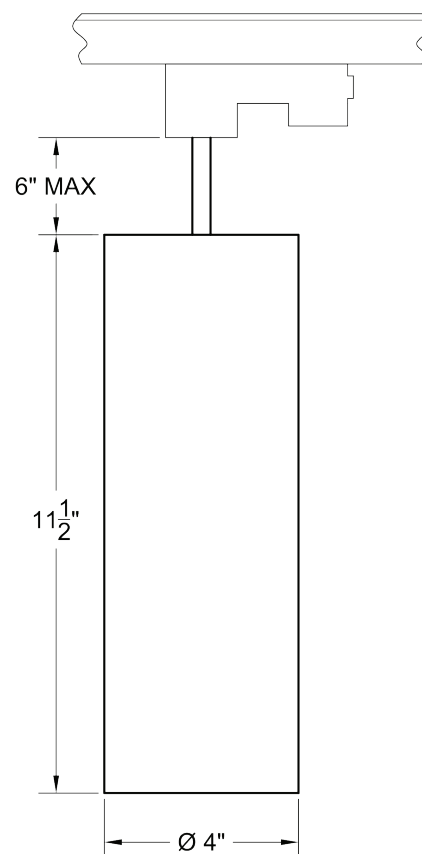

MOUNTING OPTIONS	ACCESSORIES	
DT2 Track adapter for SpecTrack 2-Circuit data track. 120V.	X00517	Accessory Holder
	LV18*	Honeycomb Louver
	OF22-9101*	Smoothing Frost Filter
HDT2 Track adapter for SpecTrack 2-Circuit data track. 277V.	GF22-600*	5x50 Linear Lens
	GF22-601*	Solite Softner
	GF22-673*	50 x 50 Spread Lens
DXTC Canopy mount with terminal block for DMX. (DMX stem mount only).	* X00517 Required, not compatible with 10° reflector option.	
GAC Track adapter for 120V global pulse track.		
CM4 Canopy mount (Casambi Wireless only).	NOTES ON DIMMING	

Visit tslight.com/resources or scan the QR Code.



PCT23 MOSAIC PENDANT

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



SPECIFY:

MODEL	FINISH	OPTICS
PCT23	B = Black W = White S = Silver CC = Custom Color	25 = 25° Degree 40 = 40° Degree 60 = 60° Degree
MOUNTING	DIMMING	STEM LENGTH
See Mounting Options for Ordering Codes	DX = DMX / RDM CS = Casambi Wireless	SP12 = 12" Stem SP18 = 18" Stem SP24 = 24" Stem SPX = Custom Stem (in inches)

DMX PROFILES

DMX PROFILE	DMX CHANNEL	Ch1	Ch2	Ch3	Ch4	Ch5
RGBIK *	5	Red	Green	Blue	Intensity	CCT
RGB22	5	Red	Green	Blue	Warm White	Cool White
IKSH	4	Intensity	CCT	Saturation	Hue	
RGB-18K	4	Red	Green	Blue	1800K White	
RGB-22K	4	Red	Green	Blue	2200K White	
RGB-27K	4	Red	Green	Blue	2700K White	
RGB-30K	4	Red	Green	Blue	3000K White	
RGB-40K	4	Red	Green	Blue	4000K White	
RGB-65K	4	Red	Green	Blue	6500K White	

* Default

EXAMPLE: PCT23-B-60-DT2-DX

MODEL	FINISH	OPTICS	MOUNTING	DIMMING	STEM LENGTH
PCT23					