

XT13R

1300 LUMEN XICATO LED RECESSED MODULES

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



DMX BASIC FEATURES

- Factory addressable or field addressable using RDM only.
- Logarithmic dimming

LED SPECIFICATIONS

- Xicato™ cold remote phosphor LED module
- **Color Temperature Options:** 2700K, 3000K, 3500K, 4000K
- **CRI:** 83 standard or 98 optional (R9=96)
- **Lumen Maintenance:** 86% of initial lumen output at 50,000 hours on LM-80 testing
- **SDCM:** 1 x 2 MacAdam Elipse. 50 kelvin tolerance
- No UV or IR

MODULE	TOTAL WATTAGE	LUMENS	EFFICACY (LM/W)	CRI
83	13	1235	95	83
98	17	1235	67	98

FEATURES

- Available in 1 to 4-light linear configurations
- 50,000 Hour life per LED module
- 20°, 40°, and 60°
- Field-changeable reflectors
- **Choice of Color Temperatures:** 2700, 3000, 3500, & 4000°K
- Available in 83 or 98 CRI
- **Lutron:** Consult factory for details.
- Blends into the ceiling and can be installed with or without trim
- Each LED is individually mounted for pan and tilt
- Accepts a variety of lenses and accessories
- Adjustable trim with torsion springs for ceilings up to 2" thick
- Adjustable butterfly mounting brackets included (additional mounting hardware provided by others)
- Fully enclosed wiring compartment
- Black, white and silver trims available - custom colors upon request
- Meets FCC 47 CFR
- Part 15/18 Requirements
- Lutron ecosystem premier driver available, featuring dimming to 0.1% and soft on/soft off incandescent like dimming. Only available on fixtures 20 watts or less.

	LENGTH	WIDTH	HEIGHT	CEILING CUT-OUT	
MODEL	(A)	(B)	(C)	(D)	(E)
XT13R-1	8 1/2"	7 1/2"	9"	7 3/16"	8"
XT13R-2	14 1/2"	7 1/2"	9"	7 3/16"	14"
XT13R-3	20 3/8"	7 1/2"	9"	7 3/16"	20"
XT13R-4	26 1/4"	7 1/2"	9"	7 3/16"	25 3/4"


XT13R

1300 LUMEN XICATO LED RECESSED MODULES

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

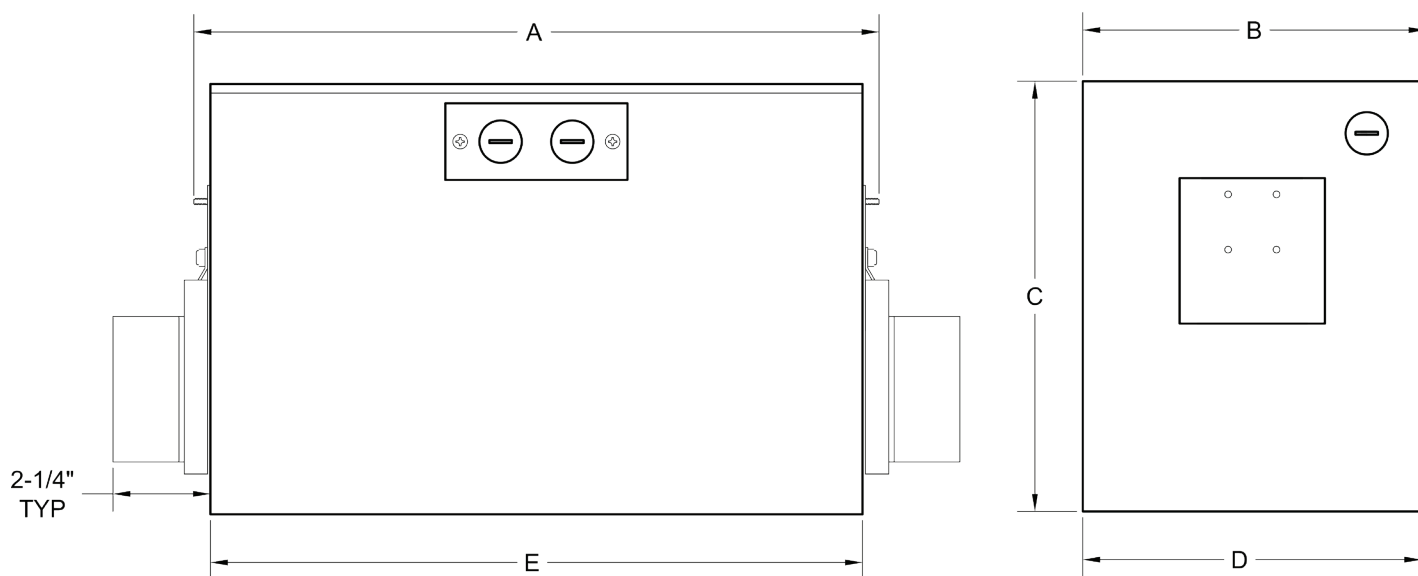

1-LINEAR
XT13R-1



3-LINEAR
XT13R-3



2-LINEAR
XT13R-2



4-LINEAR
XT13R-4

Note: These fixtures are not IC or Chicago Plenum Rated.

ACCESSORIES		NOTES ON DIMMING
LV18	Louver	<p>Visit tslight.com/resources or scan the QR Code.</p> 
FX22-26	Red Filter	
FX22-80	Blue Filter	
FX22-64	Light Blue Filter	
FX22-90	Green Filter	
FX22-21	Amber Filter	
FX22-10	Yellow Filter	
FX22-33	Pink Filter	
DF22	Dichroic Color Filter	
X00517 *	Glass / Dichroic Filter	
<p>* Required accessory when using filters. Wide range of colors available.</p>		

XT13R

1300 LUMEN XICATO LED RECESSED MODULES

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

SPECIFY:

MODEL		NUMBER OF LAMPS	CRI	
XT13R		1 = 1-Linear 2 = 2-Linear 3 = 3-Linear 4 = 4-Linear	83 98	
COLOR TEMPERATURE		INSIDE FINISH	TRIM FINISH	
27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K		B = Black W = White S = Silver CC = Custom	B = Black W = White S = Silver CC = Custom	
GIMBLE FINISH	VOLTAGE	REFLECTOR		DIMMING †
B = Black W = White S = Silver CC = Custom	100 = 100V 120 = 120V 240 = 240V 277 = 277V	20 = 20° 40 = 40° 60 = 60°		ND = Non-Dimming TE = Trailing Edge LE = Leading Edge * 010 = 0-10V DXB = DMX Basic

Maximum Ambient Temperature: 35° C

† See Page 3 for "Notes on Dimming"

* Not Available in 240 - 277V

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: XT13R-3-83-30-B-W-W-120-40-ND

MODEL	LAMPS	CRI	COLOR TEMPERATURE	INSIDE FINISH	TRIM FINISH	GIMBLE FINISH	VOLTAGE	REFLECTOR	DIMMING
XT13R									