

CR RECESSED SERIES

SPECIFICATION SHEET - NEW CONSTRUCTION

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



- 100,000 Hour life per LED
- 20°, 40°, and 60° Field-changeable reflectors
- **Color Temperatures:** 2700° K, 3000°K, 3500°K, 4000°K, 5000°K, 5700°K, & 6500°K.
- Blends into the ceiling and can be installed with or without trim
- Each LED is individually mounted for up to 45° pan and tilt
- Accepts a variety of lenses and accessories
- Adjustable trim with torsion springs for ceilings up to 2" thick
- Adjustable butterfly mounting brackets included
- Fully enclosed wiring compartment
- Black, white and silver trims available - custom colors upon request

LED SPECIFICATIONS

- Cree XLamp LED array
- **Color Temperature Options:** 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
- CRI: 80 standard or 92 optional
- **Lumen Maintenance:** 90% of initial lumen output at 33,000 hours on LM-80 testing
- No UV or IR


MODEL	CRI	TOTAL WATTAGE	LUMENS	EFFICACY (LM/W)
CR9	80 / 92	5.6 / 6.4	900 / 900	161 / 141
CR12	80 / 92	7.7 / 9.0	1200 / 1200	156 / 133
CR15	80 / 92	9.7 / 11.4	1500 / 1500	155 / 132
CR18	80 / 92	11.4 / 15.0	1800 / 1800	158 / 120
CR20	80 / 92	13.3 / 15.8	2000 / 2000	150 / 127
CR25	80 / 92	18.0 / 23.4	2500 / 2500	139 / 107
CR27	92	25.0	2700	108
CR30	80	23.4	3000	128

MODEL NUMBER	LENGTH	WIDTH	HEIGHT	CEILING CUT-OUT	
	(A)	(B)	(C)	(D)	(E)
CR20R-1	8 - 1/2"	7 - 1/2"	9"	7 - 3/16"	8"
CR20R-2	14 - 1/2"	7 - 1/2"	9"	7 - 3/16"	14"
CR20R-3	20 - 3/8"	7 - 1/2"	9"	7 - 3/16"	20"
CR20R-4	26 - 1/4"	7 - 1/2"	9"	7 - 3/16"	25 - 3/4"

CR RECESSED SERIES









SPECIFICATION SHEET - NEW CONSTRUCTION

MANUFACTURED IN THE UNITED STATES - IBEW

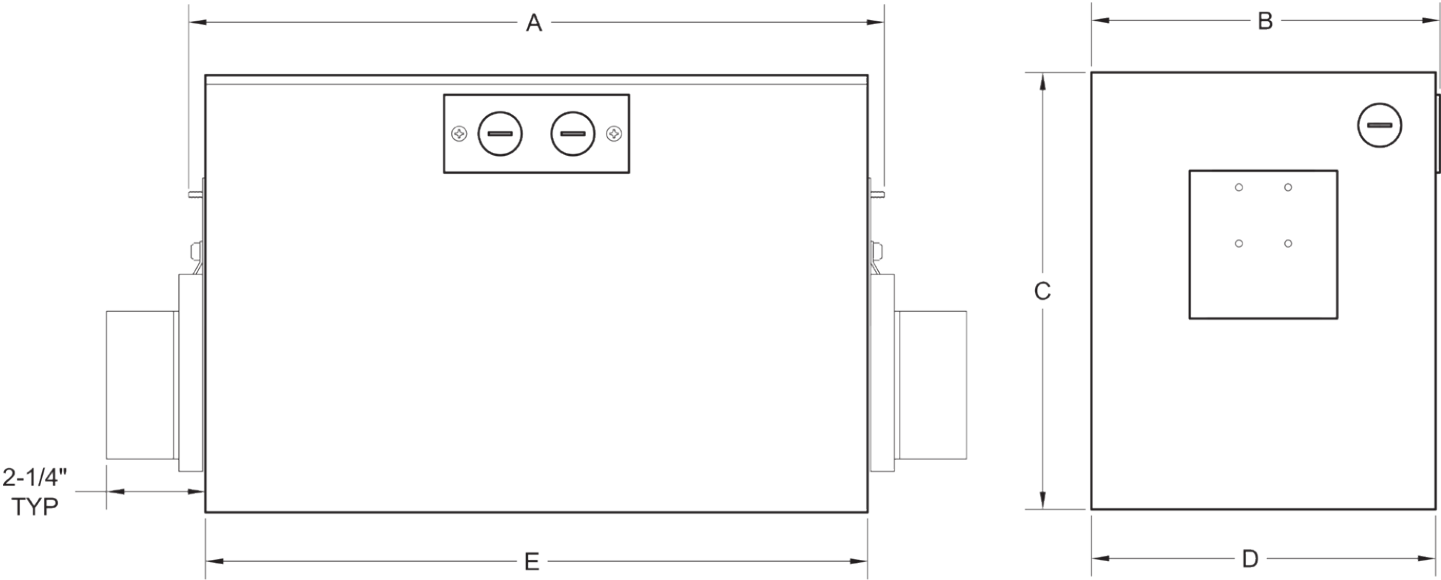

END VIEWS

SIDE VIEWS

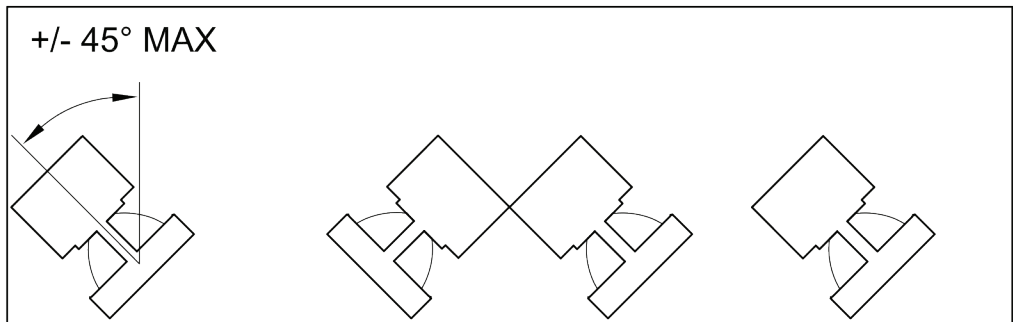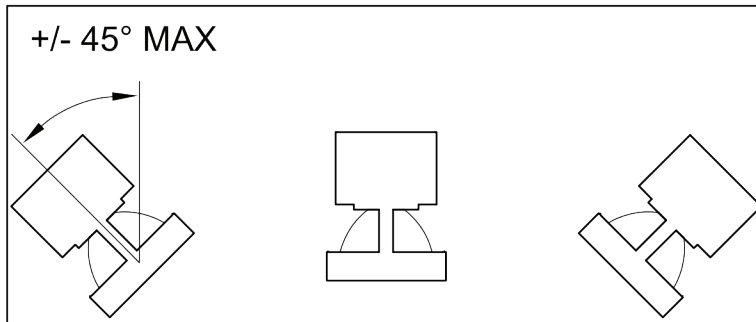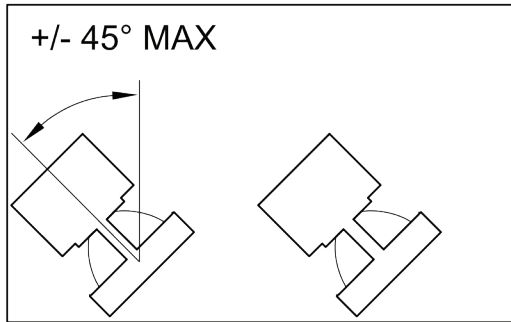

CR RECESSED SERIES

SPECIFICATION SHEET - NEW CONSTRUCTION

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

OPTICS | 20°, 40°, and 60° Field-Changeable Reflectors

CBCP:	CR9	CR12	CR15	CR18	CR20	CR25	CR30
20°	3100	4250	5500	6030	6700	8600	11000
40°	1850	2500	3250	3600	4000	5100	6500
60°	980	1350	1750	2100	2425	3200	3700

Testing done at 3000K, 80 CRI.

DIMMING

- Cree XLamp LED array
- Color Temperature Options: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K
- CRI: 80 standard or 92 optional
- Lumen Maintenance: 90% of initial lumen output at 33,000 hours on LM-80 testing
- No UV or IR

NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



1-LINEAR
CR20R-1



2-LINEAR
CR20R-2




3-LINEAR
CR20R-3




4-LINEAR
CR20R-1

PHOTOMETRIC DATA


Distance	20° Spot Reflector Beam Spread	Footcandles						
		CR9	CR12	CR15	CR18	CR20	CR25	CR30
5'	1.7"	126	170	220	241	268	344	440
10'	3.5"	31	43	55	60	67	86	110
15'	5.3"	14	19	24	27	30	38	49
20'	7.1"	8	11	14	15	17	22	28
25'	8.8"	5	7	9	10	11	14	18
30'	10.6"	-	6	6	7	7	10	12



Distance	40° Medium Reflector Beam Spread	Footcandles						
		CR9	CR12	CR15	CR18	CR20	CR25	CR30
5'	3.6"	74	100	130	144	160	204	260
10'	7.3"	19	25	33	36	40	51	65
15'	10.9"	8	11	15	16	18	23	29
20'	14.6"	5	6	8	9	10	13	16
25'	18.2"	-	-	5	6	6	8	10
30'	22.2"	-	-	-	-	-	6	7



Distance	60° Flood Reflector Beam Spread	Footcandles						
		CR9	CR12	CR15	CR18	CR20	CR25	CR30
5'	5.7"	39	54	70	85	97	128	148
10'	11.6"	10	14	18	21	24	32	37
15'	17.3"	5	6	8	9	11	14	16
20'	23.1"	-	5	5	5	6	8	9
25'	28.9"	-	-	-	-	5	5	6
30'	35.2"	-	-	-	-	-	-	-



CR RECESSED SERIES

SPECIFICATION SHEET - NEW CONSTRUCTION

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

SPECIFY:

MODEL	LUMENS	NUMBER OF LAMPS
CR	9R = 900 12R = 1200 15R = 1500 18R = 1800 20R = 2000 25R = 2500 27R = 2700 * 30R = 3000 ** 35R = 3500 **	1 = 1-Linear 2 = 2-Linear 3 = 3-Linear 4 = 4-Linear
CRI	COLOR TEMPERATURE	FIXTURE FINISH
80 92	27 = 2700°K 30 = 3000°K 35 = 3500°K 40 = 4000°K 50 = 5000°K 57 = 5700°K 65 = 6500°K	B = Black W = White S = Silver CC = Custom Color
TRIM FINISH	GIMBLE FINISH	VOLTAGE
B = Black W = White S = Silver CC = Custom Color	B = Black W = White S = Silver CC = Custom Color	100 †† 120 240 277
REFLECTOR	DIMMING †	ACCESSORIES
20 = 20° Degree 40 = 40° Degree 60 = 60° Degree	TE = Trailing Edge *** LE = Leading Edge 010 = 0-10V ND = Non-Dimming DMX = DMX Basic ECP = Ecosystem premier 0.1% dim	LV22 = Louver FX22-26 = Red Filter FX22-80 = Blue Filter FX22-64 = Light Blue Filter FX22-90 = Green Filter FX22-21 = Amber FX22-10 = Yellow FX22-33 = Pink DF22 = Dichroic Color Filter X00517 = Accessory Holder

Maximum Ambient Temperature: 35°C
Maximum Operating Angle: 45° from vertical

* 92 CRI Only ** 80 CRI Only
*** 277V TE Dimming available on 1800, 2500 & 3000 lumen, 80 CRI and 1500 & 2700 lumen, 92 CRI only.

† See "Notes on Dimming"
†† Non-Dim or 0-10V Dimming Only

EXAMPLE: CR-9R-2-80-35-B-B-B-120-20-LE-LV22

MODEL	LUMENS	LAMPS	CRI	COLOR TEMPERATURE	FIXTURE FINISH	TRIM FINISH	GIMBLE FINISH	VOLTAGE	REFLECTOR	DIMMING	ACCESSORIES
CR											