




Manufactured in the USA - IBEW

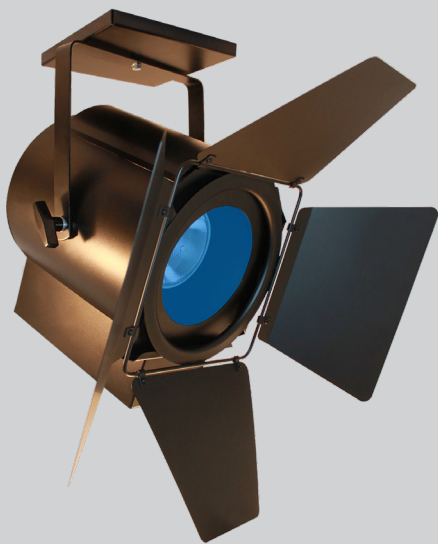

Features

- Theatrical design
- Performance equivalent to 100W halogen PAR lamp
- Accessory holder
- Numerous mounting options
- Industry leading lumen maintenance and color point stability
- Sturdy steel construction
- Ratchet handle locking for vertical focusing
- Dimmable
- Weight: 9.75 lbs

LED

- 10° SORAA lamp included - use snaps to change the beam angle.
- Color temp options: 2700K, 3000K, 4000K
- CRI: 85 or 95
- No UV or IR

Dimming

- Trailing edge (ELV)
- Leading edge (Triac)



Snap Lenses

* Specification sheets are subject to change without notice.

8PC38 18.5W

LED SORAA PAR38




5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

The 8PC38 Spotlight is a specification grade medium and long throw unit designed for PAR38 medium screw base LED lamps. Its theatrical styling and architectural function makes it the perfect unit for spaces such as museums, galleries, exhibits, retail and themed environments where a visually interesting, high intensity spotlight is required.

By utilizing Soraa's Snap System, there are unlimited possibilities for customizing this fixture. Options include the ability to field change the beam angle (Beam Spreader Snap), alter color temperature (CTO Snap), or to add a louver. Color Snaps can be used to produce brilliant hues of any color that Rosco or Lee offer.

The Enhance Lens Snap can increase the vividness of warm colors (including red, orange and pink and greens). Aim Snaps can bend the beam to a maximum deflection angle of 20°. Linear Snap Lenses can alter the beam to act as a wall wash.

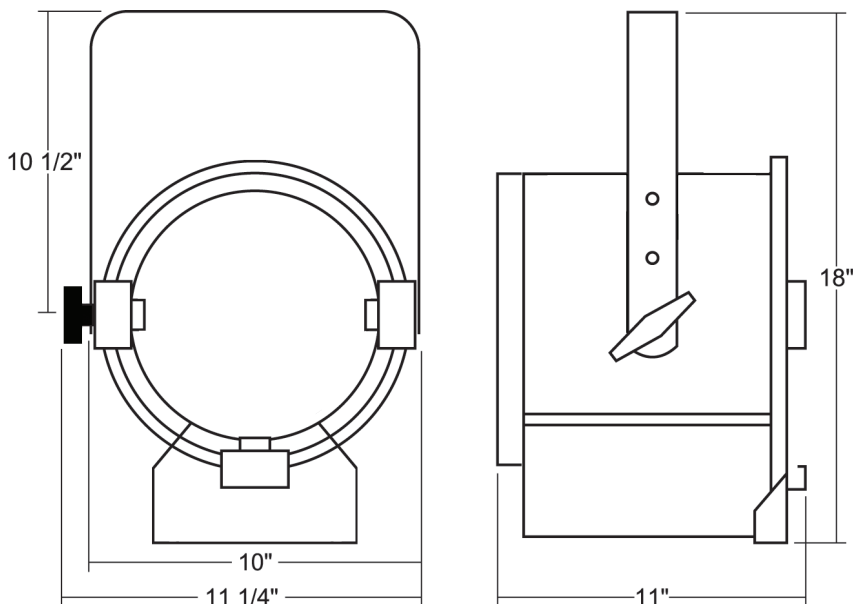

Lamp Type	Watts	CRI	Lumens*
Brilliant	18.5	85 (R9=0)	1280
Vivid	18.5	95 (R9=95)	1000

* Lumens vary depending on color temperature - results for 3000K lamp used above.

Ordering Matrix





Model	CRI	Color Temperature	Color	Mounting Options	Accessories
8PC38	95 85	27 = 2700K 30 = 3000K	B=Black W=White S=Silver CC=Custom Color	See Mounting Options for Ordering Codes	See Accessory Options for Ordering Codes

* All fixtures sold with 10° beam angle lamps – use Beam Spreaders to achieve desired angle.

Example: 8PC38-9527-B-ADI-LV6

8PC38-_____

Photometric Data

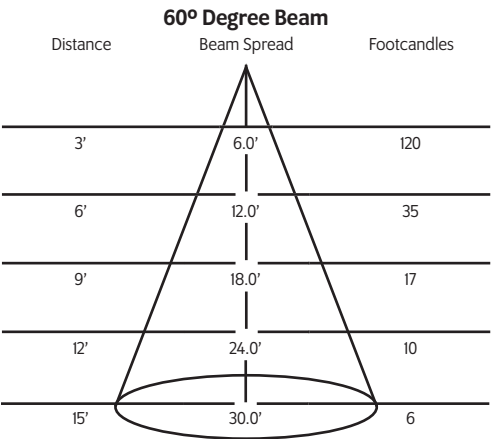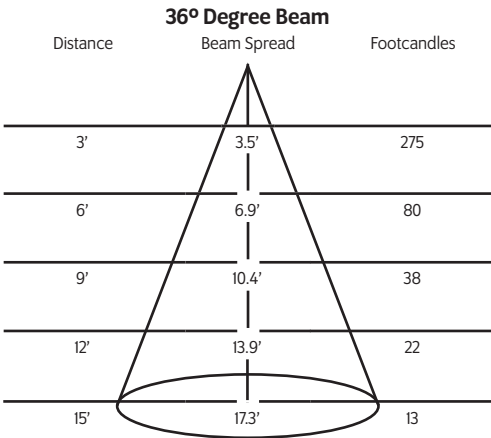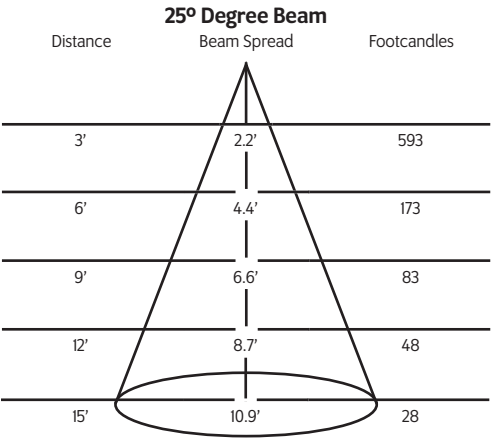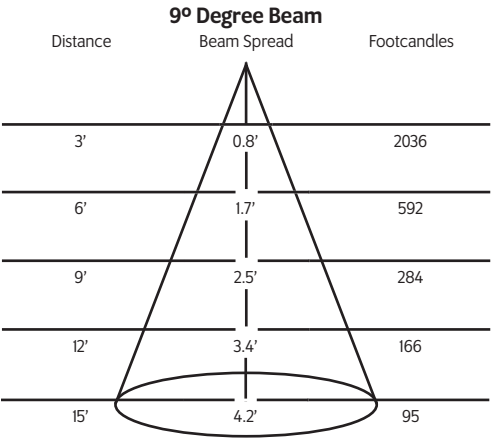


* Testing done on 3000K unit: Lumen output changes based on color temperature.

Mounting Options

TA2
Track adapter for G-Series specification grade 2-circuit track. 120V or 277V.

TA3
Track adapter for G-Series specification grade 3-circuit track. 120V.



CM4
Canopy mount.



US1
6 5/8" x 1 1/2" Unistrut adapter.



TB8
8" x 8" Portable table base for floor or table use.



MN
Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

PC9M
Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.



Accessories

- | | |
|-----------------|-----------------------|
| LV46 | Louver |
| BD46 | Barndoor |
| CF46 | Color Frame |
| GF46 | Glass Color Filter |
| DF46 | Dichroic Color Filter |
| GF46-600 | 5°x50° Linear Lens |
| GF46-601 | Beam Softener |
| GF46-673 | 50°x50° Spread Lens |
| CC18 | Coiled Cord |
| SC | Safety Cable |
| IP | Integral Dimmer |

Snap Accessories

- | | |
|----------------|--------------------------------|
| 01145 | 25° Beam Spreader Snap |
| 01147 | 36° Beam Spreader Snap |
| 01149 | 60° Beam Spreader Snap |
| 01595 | 10°-36° Linear Snap |
| 03261 | 10°-60° Linear Snap |
| 01597 | 36°x36° Flat Top Snap |
| 01151 | 40° Cutoff Louver |
| 03257 | 20° Maximum Deflection Snap |
| 01153 | ¼ Color Temperature Shift Snap |
| 01155 | ½ Color Temperature Shift Snap |
| 01157 | ¾ Color Temperature Shift Snap |
| 03283 | Enhance Snap |
| 02185-C | Color Snap (Specify Color) |

Extension Wands

- | | |
|--------------|---------------|
| SP 12 | 12" Stem |
| SP 18 | 18" Stem |
| SP 24 | 24" Stem |
| SP X | Custom Length |

Connector / Plug Types (Optional)

- | | |
|-----------|----------------------|
| ED | Edison Connector |
| TL | Twist Lock Connector |
| SP | Stage Pin Connector |