

Job Name: Fixture Type: Qty:

LED by Times Square Lighting



LD16V 5.7W MR16 LED


The clean and sleek style of the LD16V makes this fixture ideal for any interior space such as a museum, gallery, or anywhere a visually interesting fixture is needed. This compact unit accepts energy efficient LED lamps that draw 5.7 watts and feature a wide variety of beam spreads, longer lamp life and minimal heat output. All this is achieved while delivering the performance of a conventional halogen light source.

The LD16V is constructed of lightweight aluminum and has an adjustable self-locking head. Comes in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

Features:

- Performance equivalent to 35W halogen MR16 lamp
- 80% power savings over 80W halogen and > 10 times the service life
- Precision optic delivering high quality, uniform beam pattern
- Industry leading lumen maintenance and color point stability
- 12V, 5.7W
- Power factor of >0.92
- Dimmable
- Numerous mounting options and accessories

Manufactured in the USA - IBEW

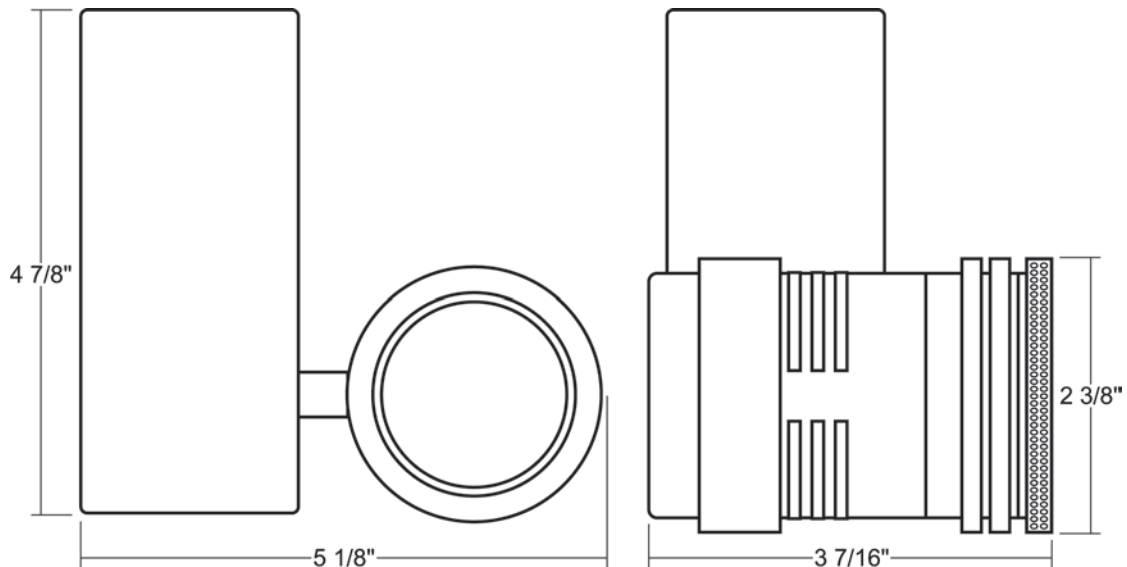

Last updated 02/24/2010.

Specify: LD16V-XXXX - - -

MODEL NUMBER

FINISH

MOUNTING (optional)

ACCESSORIES (optional)

Example:

LD16V-2712


-B

-T1


-GF2

Photometric Data


LD16V-3112 3100K Spot

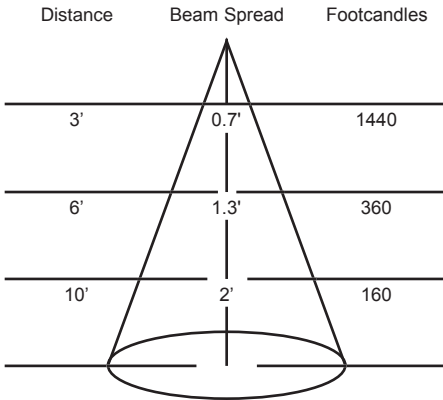

LD16V-3123 3100K Narrow Flood

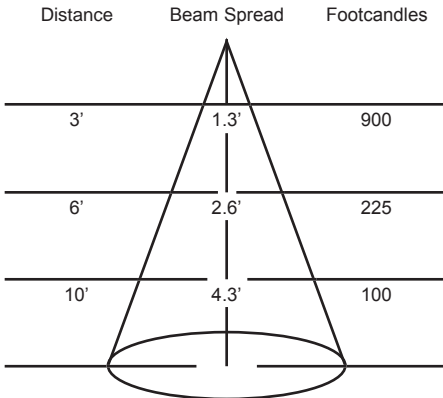

LD16V-3137 3100K Flood

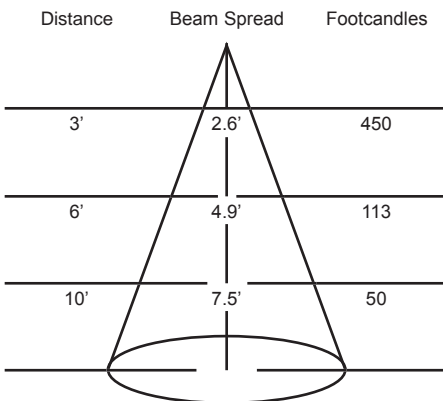

Fixture Types

LD16V-2712 5.7W; 12° Spot Beam; 85 CRI; 2700°K Color Temp

LD16V-3112 5.7W; 12° Spot Beam; 85 CRI; 3100°K Color Temp

LD16V-4112 5.7W; 12° Spot Beam; 75 CRI; 4100°K Color Temp

LD16V-2723 5.7W; 23° Narrow Flood Beam; 85 CRI; 2700°K Color Temp

LD16V-3123 5.7W; 23° Narrow Flood Beam; 85 CRI; 3100°K Color Temp

LD16V-4123 5.7W; 23° Narrow Flood Beam; 75 CRI; 4100°K Color Temp

LD16V-2737 5.7W; 37° Flood Beam; 85 CRI; 2700°K Color Temp

LD16V-3137 5.7W; 37° Flood Beam; 85 CRI; 3100°K Color Temp

LD16V-4137 5.7W; 37° Flood Beam; 75 CRI; 4100°K Color Temp

Mounting Options

T1

Track adapter for commercial grade 1 and 2-circuit track.

TA2S

Track adapter for specification grade 2-circuit track.

HTA2

Track adapter for specification grade 2-circuit 277-volt track.

TA3

Track adapter for specification grade 3-circuit track.

US1

Unistrut adapter.

MC

Medium duty pipe clamp for pipes up to 1 1/2" O.D.

MN

Medium duty pipe clamp for pipes up to 2" O.D.

XTSA70

Monopoint canopy for specification grade 2 and 3-circuit track.

CM4

6" Canopy for permanent mounting on standard 4" octagonal outlet boxes.

TB3

4" Portable wall mount/table base for smaller fixtures.

TB4

6" Portable wall mount/table base for floor, wall or table use.

Accessories

LV2	Louver
GF2	Glass Color Filter
DF2	Dichroic Color Filter
GF2-600	5°x50° Linear Lens
GF2-601	Beam Softener
GF2-673	50°x50° Spread Lens
GF2-702	UV Blocking Filter
CC18	Coiled Cord

Finish

B	Black
W	White
S	Silver
CC	Custom Color