

Job Name: Fixture Type: Qty:

LED by Times Square Lighting



LED1738 PAR38 LED


The LED1738 is a specification grade LED fixture that is capable of replacing 75-watt line voltage and 39-watt metal halide fixtures. Its light weight and small size makes it ideal for interior spaces such as museums, exhibits, shops, residences; and areas where high-intensity light is needed.

Features include a three piece spinning set that allows full accessory rotation that locks in place. A rugged steel self-locking yoke, and internal accessory ring that can hold up to four accessories is also included. Available in standard black, white and silver finishes. Custom colors are available by request.

Features:

- Performance equivalent to 75W halogen PAR lamp
- 75% power savings over 75W halogen and > 10 times the service life
- Internal self-locking yoke
- Internal accessory holder
- Numerous mounting options
- Equipped with lens rotation and relamping handle
- Industry leading lumen maintenance and color point stability
- Dimmable

Manufactured in the USA - IBEW

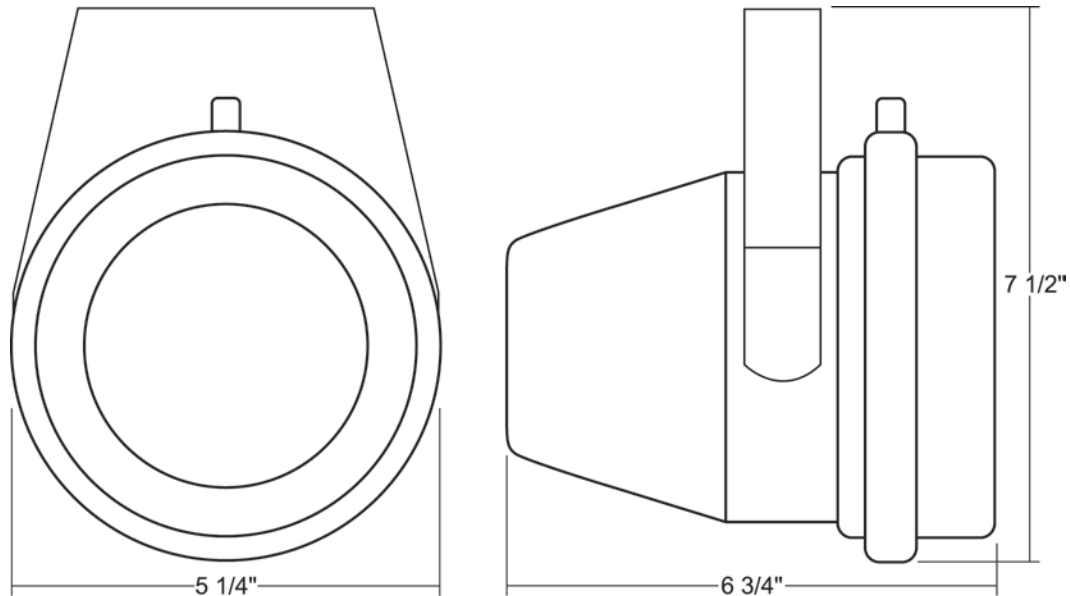

Last updated 01/17/2012.

Specify: LED1738-XXXX - - -

MODEL NUMBER

FINISH

MOUNTING (optional)

ACCESSORIES (optional)

Example: LED1738-906


-B

-T1


-LV7

Photometric Data


LED1738-906 3000K Spot

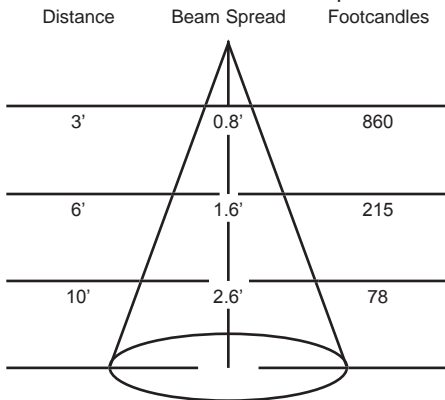

LED1738-640 3000K Narrow Flood

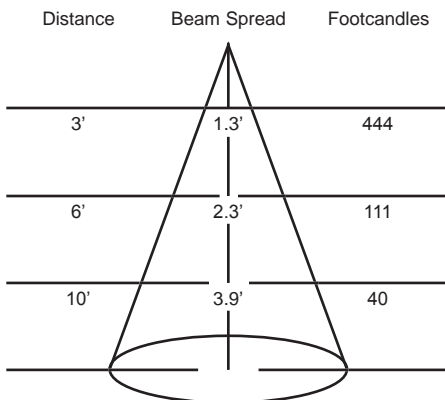

LED1738-745 3000K Flood

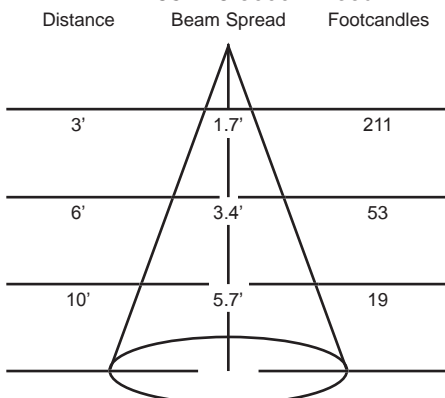

Fixture Types

LED1738-433 17W; 45,000Hrs; 10° Beam; 930 Lumens; 3000°K Color Temp

LED1738-516 17W; 45,000Hrs; 15° Beam; 880 Lumens; 2700°K Color Temp

LED1738-532 17W; 45,000Hrs; 15° Beam; 1080 Lumens; 4000°K Color Temp

LED1738-191 17W; 45,000Hrs; 22° Beam; 1050 Lumens; 4000°K Color Temp

LED1738-657 18W; 50,000Hrs; 25° Beam; 860 Lumens; 2700°K Color Temp

LED1738-658 18W; 50,000Hrs; 40° Beam; 860 Lumens; 2700°K Color Temp

LED1738-640 18W; 50,000Hrs; 25° Beam; 900 Lumens; 3000°K Color Temp

LED1738-641 18W; 50,000Hrs; 40° Beam; 900 Lumens; 3000°K Color Temp

LED1738-761 18W; 50,000Hrs; 40° Beam; 920 Lumens; 4000°K Color Temp

LED1738-906 21W; 50,000Hrs; 15° Beam; 1150 Lumens; 3000°K Color Temp

LED1738-745 21W; 50,000Hrs; 30° Beam; 1150 Lumens; 3000°K Color Temp

LED1738-806 24W; 50,000Hrs; 25° Beam; 1300 Lumens; 3000°K Color Temp

LED1738-807 24W; 50,000Hrs; 40° Beam; 1300 Lumens; 3000°K Color Temp

Mounting Options

T1
Track adapter for commercial grade 1 and 2-circuit track.

TA2S
Track adapter for specification grade 2-circuit track.

TA3
Track adapter for specification grade 3-circuit track.

US1
Unistrut adapter.

MC

Medium duty pipe clamp for pipes up to 1 1/2" O.D.

MN

Medium duty pipe clamp for pipes up to 2" O.D.

PC9M

Heavy duty pipe clamp for pipes up to 2" O.D.

CM4

6" Canopy for permanent mounting on standard 4" octagonal outlet boxes.

TB4

6" Portable wall mount/table base for floor, wall or table use.

Accessories

LV7	Louver
XL7	Cross Baffle Louver
BD7L	Barndoor
HD7	Hood
XH7	Cross Baffle Hood
SH7	Sparkle Hood
GFH8	Glass Filter Holder
GF7	Glass Color Filter
DF7	Dichroic Color Filter
GF7-600	5°x50° Linear Lens
GF7-601	Beam Softener
GF7-673	50°x50° Spread Lens
GF7-702	UV Blocking Filter
CC18	Coiled Cord
SC-24	Safety Cable
WL	Wrench Locking

Finish

B	Black
W	White
S	Silver
CC	Custom Color