

Job Name: Fixture Type: Qty:

LED by Times Square Lighting



LED720 7W PAR20 LED


The LED720 combines industry leading high performance LED technology with optical, electrical, and thermal management solutions to deliver the lighting equivalence of a conventional 50W halogen PAR20 lamp and the benefits of solid state lighting. The LED720 delivers the quality and quantity of light required for a broad range of lighting applications in spot, narrow and flood beams.

Features include an internal self-locking yoke, adjustable head and hinged front for easy re-lamping. Internal accessory holder accepts louvers, barndoors, hoods and a variety of filters. Available in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

Features:

- 85% power savings over 50W halogen and > 10 times the service life
- Precision optic delivering high quality smooth gradient light beam pattern
- Industry leading lumen maintenance and color point stability
- 120, 277, and 220V AC
- Power factor 0.85
- Dimmable with standard dimmers
- Internal self-locking yoke
- Numerous mounting options

Manufactured in the USA - IBEW

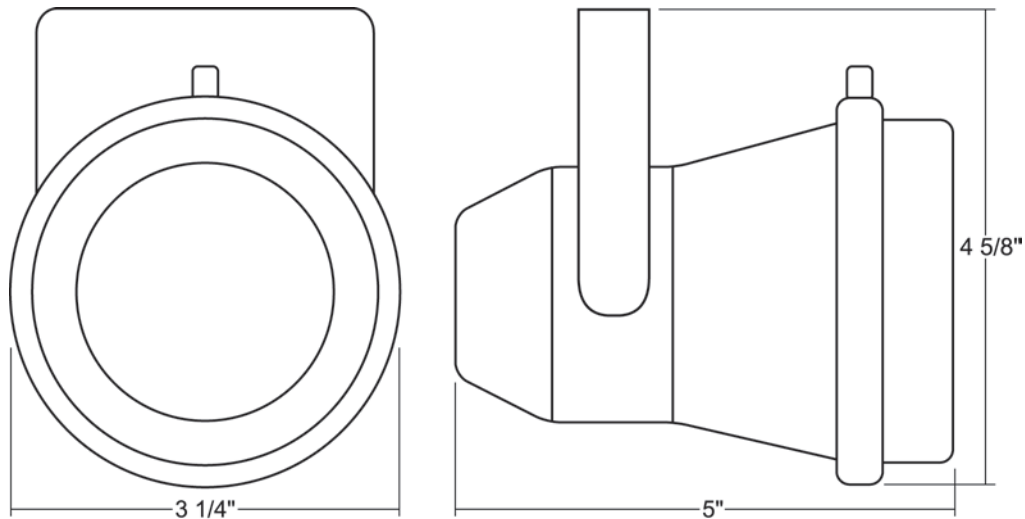

Last updated 02/25/2010.


LED720 7W PAR20 LED

Specify: LED720-XXXX - - -


	MODEL NUMBER	FINISH	MOUNTING (optional)	ACCESSORIES (optional)
Example:	LED720-2715	-B	-T1	-LV7

Photometric Data


LED720-3115 3100K Spot

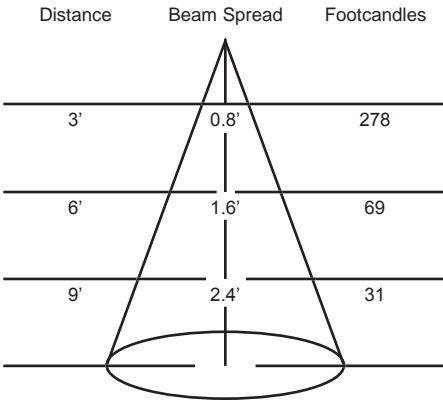

LED720-3123 3100K Narrow Flood

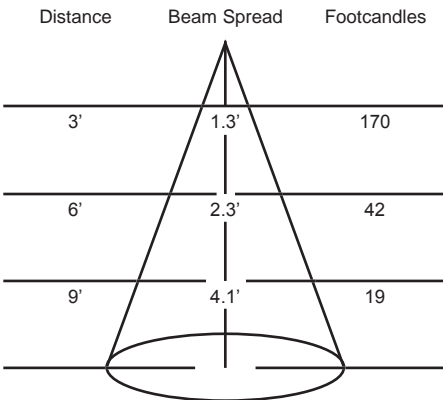

LED720-3132 3100K Flood

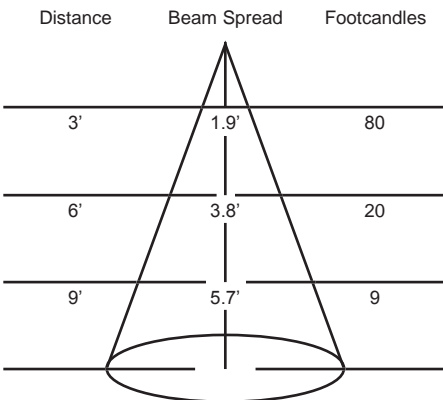

Fixture Types

LED720-2715 7W; 50,000Hrs; 15° Spot Beam; 2200 CBCP; 2700°K Color Temp

LED720-3115 7W; 50,000Hrs; 15° Spot Beam; 2500 CBCP; 3100°K Color Temp

LED720-4115 7W; 50,000Hrs; 15° Spot Beam; 3000 CBCP; 4100°K Color Temp

LED720-2723 7W; 50,000Hrs; 23° Narrow Flood Beam; 1300 CBCP; 2700°K Color Temp

LED720-3123 7W; 50,000Hrs; 23° Narrow Flood Beam; 1500 CBCP; 3100°K Color Temp

LED720-4123 7W; 50,000Hrs; 23° Narrow Flood Beam; 1800 CBCP; 4100°K Color Temp

LED720-2735 7W; 50,000Hrs; 35° Flood Beam; 600 CBCP; 2700°K Color Temp

LED720-3135 7W; 50,000Hrs; 35° Flood Beam; 700 CBCP; 3100°K Color Temp

LED720-4135 7W; 50,000Hrs; 35° Flood Beam; 850 CBCP; 4100°K Color Temp

Mounting Options

T1
Track adapter for commercial grade 1 and 2-circuit track.

TA2S
Track adapter for specification grade 2-circuit track.

HTA2
Track adapter for specification grade 2-circuit 277-volt track.

TA3
Track adapter for specification grade 3-circuit track.

US1
Unistrut adapter.

MC
Medium duty pipe clamp for pipes up to 1 1/2" O.D.

MN
Medium duty pipe clamp for pipes up to 2" O.D.

XTSA70
Monopoint canopy for specification grade 2 and 3-circuit track.

CM4

6" Canopy for permanent mounting on standard 4" octagonal outlet boxes.

TB4

6" Portable wall mount/table base for floor, wall or table use.

Accessories

LV3	Louver
XL3	Cross Baffle Louver
BD3	Barndoor
HD3	Hood
CC18	Coiled Cord
SC-24	Safety Cable
DM	Integral Dimmer
WL	Wrench Locking
WW3	Wall Wash Kicker w/ Spread Lens

Finish

B	Black
W	White
S	Silver
CC	Custom Color