



PRISMLine Optic 12, 24, 36 SmartWhite




When color rendering is important, the SmartWhite provides the combination of both warm white and cold white high powered luxem LED'S 3200K to 6500K.

Technical Specifications:



	PRISMLine Optic 12 SmartWhite	PRISMLine Optic 24 SmartWhite
Max. input current:	350 mA	350 mA
Maximum Power Consumption:	13.6 Watts	27.2 Watts
Compatible Power Supplies:	PRISMPower SmartWhite 36, 144	PRISMPower SmartWhite 36, 144
Optical System:	6°, 15°, 25°, 25°x6°, 38°	6°, 15°, 25°, 25°x6°, 38°
LED Device:	1 Watt Luxeon	1 Watt Luxeon
Warm White LEDs (WW):	3300 K	3300 K
Cool White LEDs (CW):	6500 K	6500 K
Typical Lumen Maintenance:	70% @ 50,000 hours	70% @ 50,000 hours
Led Life Expectancy:	minimum 50,000 hours	minimum 50,000 hours
Construction:	precision extruded aluminium	precision extruded aluminium
Power/Data Plug:	RJ45	RJ45
Weight:	1.7 lbs	2.9 lbs

	PRISMLine Optic 36 SmartWhite
Max. input current:	350 mA
Maximum Power Consumption:	40.8 Watts
Compatible Power Supplies:	PRISMPower SmartWhite 36, 144
Optical System:	6°, 15°, 25°, 25°x6°, 38°
LED Device:	1 Watt Luxeon
Warm White LEDs (WW):	3300 K
Cool White LEDs (CW):	6500 K
Typical Lumen Maintenance:	70% @ 50,000 hours
Led Life Expectancy:	minimum 50,000 hours
Construction:	precision extruded aluminium
Power/Data Plug:	RJ45
Weight:	4.2 lbs

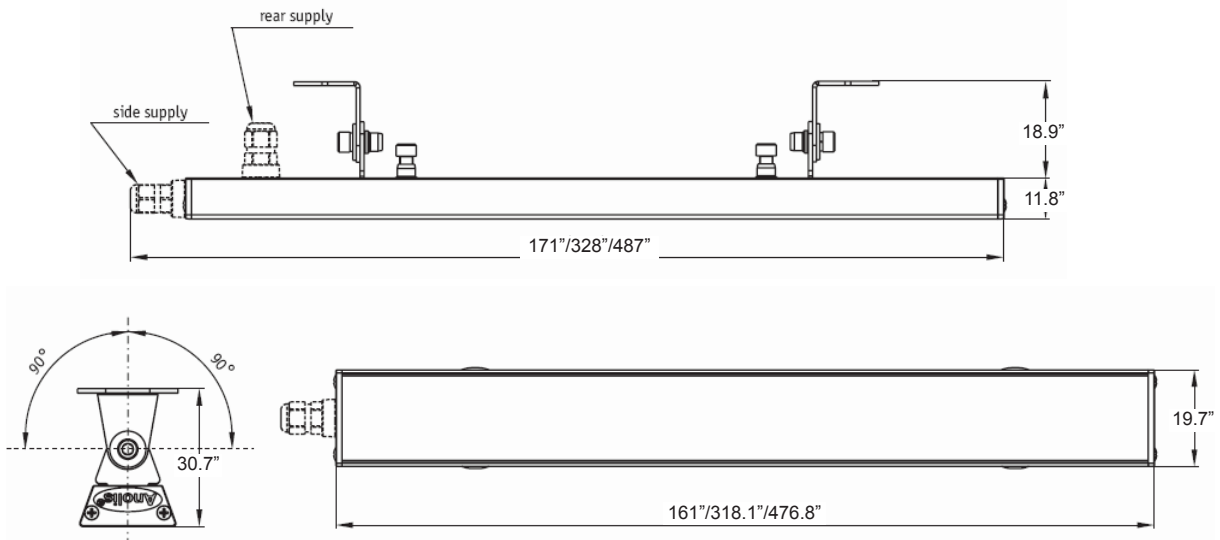

Last updated 06/25/2008.