Job Name: _____ **Fixture Type:** _____ **Qty:** _____

PRISM
by TIMES SQUARE LIGHTING

PRISMSource Outdoor 3,6,7

The PRISMSource Outdoor 3, 6, 7's high IP Rating of 68, allows the units to operate completely submerged in water, making illumination of water features a possibility. Power and control for the PRISMSource Outdoor Range come from the PRISMPower 36/144.

Technical Specifications:

	PRISMSource 3	PRISMSource 6
Max. input current:	350 mA	350 mA
Maximum Power Consumption:	4.2 Watts	8.4 Watts
Compatible Power Supplies:	PRISMPower36,72,144,360,16x6	PRISMPower36,72,144,360,16x6
Compatible Power Supplies for single colour variants:	PRISMPower SmartWhite 36, 144	PRISMPower SmartWhite 36, 144
Optical System:	6°, 15°, 25°, 38°	6°, 25°
LED Device:	1 Watt Luxeon	1 Watt Luxeon
Warm White LEDs (WW):	3300 K	3300 K
Cool White LEDs (CW):	6500 K	6500 K
Typical Lumen Maintenance:	70% @ 50,000 hours	70% @ 50,000 hours
Led Life Expectancy:	minimum 50,000 hours	minimum 50,000 hours
Construction: top flange:	stainless steel	stainless steel
housing:	stainless steel	stainless steel
"U" bracket:	stainless steel	stainless steel
cover:	tempered glass	tempered glass
Weight:	1.1 lbs	1.3 lbs
Power/Data plug:	RJ45	RJ45
LED Color Variants:	RGB, R, G, B, A, CW, WW	RGB, RGBCW, RGBWW,R, G, B, A, CW, WW

	PRISMSource 7
Max. input current:	350 mA
Maximum Power Consumption:	9.6 Watts
Compatible Power Supplies:	PRISMPower36,72,144,360,16x6
Compatible Power Supplies for single colour variants:	PRISMPower SmartWhite 36, 144
Optical System:	6°, 25°
LED Device:	1 Watt Luxeon
Warm White LEDs (WW):	3300 K
Cool White LEDs (CW):	6500 K
Typical Lumen Maintenance:	70% @ 50,000 hours
Led Life Expectancy:	minimum 50,000 hours
Construction: top flange:	stainless steel
housing:	stainless steel
"U" bracket:	stainless steel
cover:	tempered glass
Weight:	1.3 lbs
Power/Data plug:	RJ45
LED Color Variants:	RGBCW, RGBWW, R, G, B, A, CW, WW

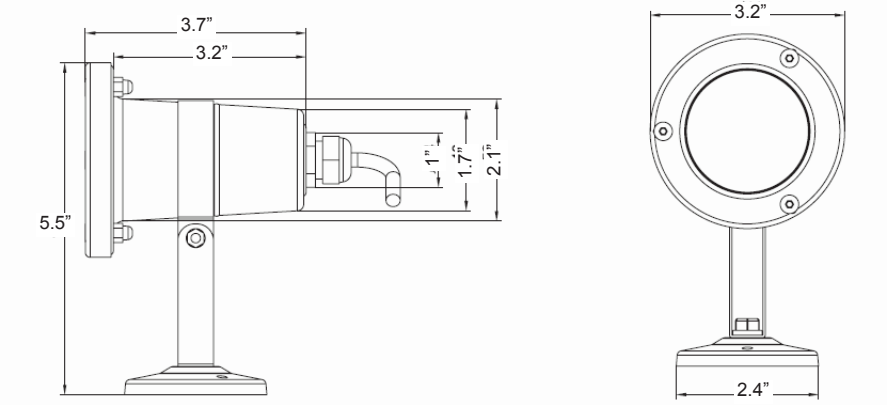

Last updated 06/25/2008.

TIMES SQUARE LIGHTING
Architectural & Stage Ltg. Systems

5 Holt Drive • Stony Point, NY 10980
Phone: 845-947-3034 • Fax: 845-947-3047 • www.tslight.com
Specifications are subject to change without notice.