

**LED Series** by Times Square Lighting

**STROKER GF LED Floodlight**



The Stroker GF is fitted with thirty-six 3W full-color LEDs and is designed as a high-power color changer for exterior and interior use. The Stroker GF incorporates state of the art electronic color mixing and high reliability. Powerful, uniform and effective color rendering is achieved in a unit requiring minimal maintenance. Superb output is made possible by the elliptical optics that can capture a greater portion of light with higher transmission efficiency.




The Stroker GF is lightweight and compact in size for extreme manageability. IP65 certified weather protection enables true year-round use. The Stroker GF features a built-in yoke, onboard dip-switches for quick DMX addressing, and IP65 XLR connectors for easy set up.

The use of magnetic levitation motor fans makes the Stroker GF nearly noiseless and suitable for applications such as theatre, museums, TV studios and movie sets. Stroker GF utilizes DMX512 for full digital control. However, the Stroker GF can also run pre-programmed sequences in stand-alone or master/slave mode without the need for DMX control.

**Features:**

Available models	
AL1630	Stroker GF 12°
AL1632	Stroker GF 28°
AL1634	Stroker GF 40°

- 36 high-power, 3W, full-color LEDs
- IP65 extruded aluminium body with all-round heat sink fins
- Long-life, 100,000 hour LEDs
- Scratch resistant textured polyester grey finish, protected against UV deterioration and general corrosion.
- Adjustable mounting yoke

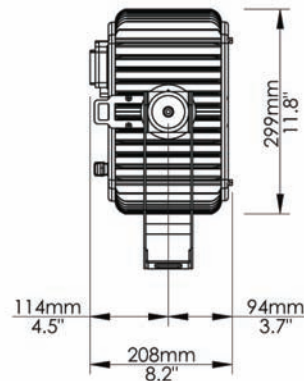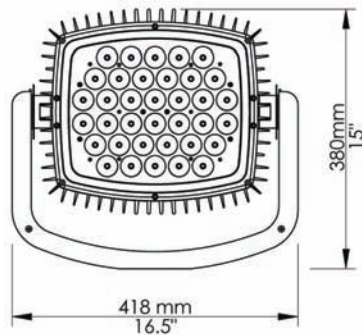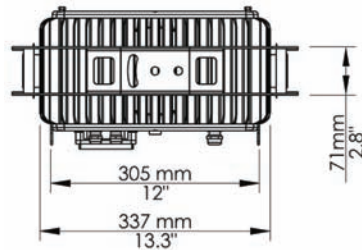


Last updated 05/04/2009.

# STROKER GF LED Floodlight

Specify: STROKER GF AL\_\_\_\_\_

MODEL NUMBER	MOUNTING (optional)	ACCESSORIES (optional)
Example: STROKER GF AL1630	-PC9M	-AL1616

## Photometric Data

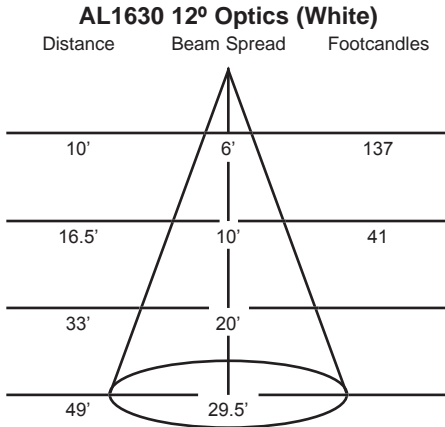

## Optics/Lamp Types

**Model AL1630** 36 3W RGB LEDs;  
100,000Hrs; 12° Lens

**Model AL1632** 36 3W RGB LEDs;  
100,000Hrs; 28° Lens

**Model AL1634** 36 3W RGB LEDs;  
100,000Hrs; 40° Lens

## Mounting Options

### PC9M

Heavy duty pipe clamp for large, heavy fixtures. For pipes 1/2" to 1 1/2" O.D.

## Accessories

AL1646	12° Replacement Lens
AL1648	28° Replacement Lens
AL1650	40° Replacement Lens
AL1616	Barndoor
AL1618	Mounting Plate
AD4110	IP65 Universal DMX controller
SC	Safety Cable