

Job Name:  Fixture Type:  Qty:

**Wall Wash by Times Square Lighting**



**FF18 18W, FF40 40W Fluorescent**

The FF18 and the FF40 are wide-angle wall wash units that produces a very broad beam of light. Utilizing two long lasting 18 or 40-watt fluorescent lamps, these units are energy efficient and cut operating costs and heat by up to 75% when compared to standard incandescent lamps.

The FF18 and FF40 are ideal for general lighting in galleries, museums, exhibits, retail displays and theaters. Comes complete with a parabolic louver that has a low iridescent finish providing a lateral shading of 40° degrees. Clear high reflectance aluminum reflector.


**Features:**

- FF18 accepts 18-watt fluorescent lamps
- FF40 accepts 40-watt fluorescent lamps
- Numerous mounting options


Manufactured in the USA - IBEW



**FF18: Front View (4 1/2" deep)**

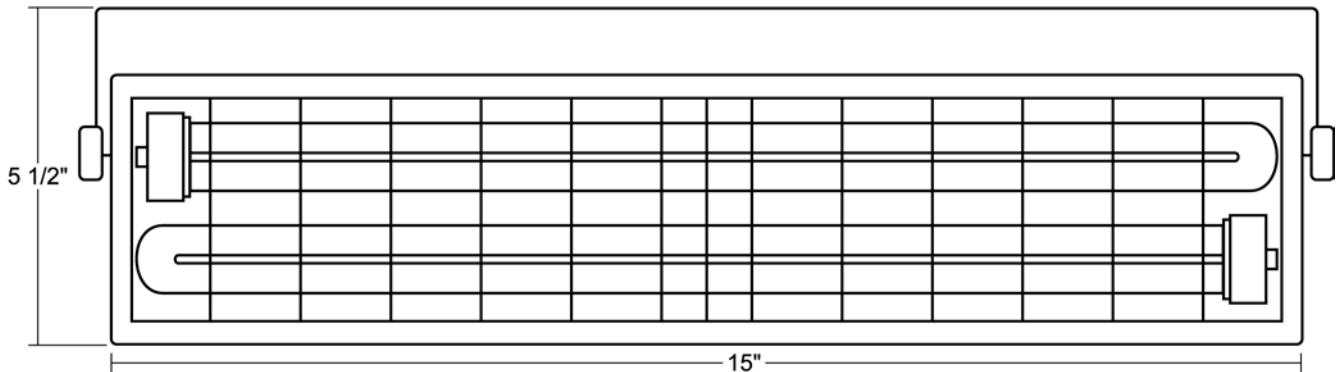

**FF40: Front View (4 1/2" deep)**

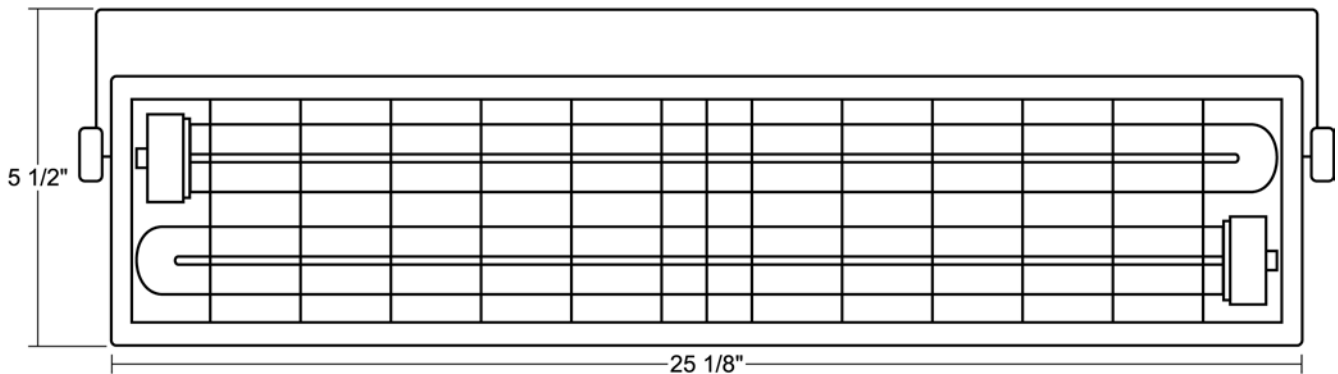

Last updated 03/10/2008.

# FF18 18W, FF40 40W Fluorescent

Specify: - - -

	MODEL NUMBER	FINISH	MOUNTING (optional)	ACCESSORIES (optional)
Example:	FF18 or FF40	-B	-T1	-CC18

## Photometric Data

### F40/30BX/SPX35 35° - Aimed straight down

	FF40							FF40								
	0'	1'	2'	3'	4'	5'	6'	7'	0'	1'	2'	3'	4'	5'	6'	7'
1' (Distance from Ceiling)	30	35	39	40	40	40	39	35	20	22	22	25	25	25	25	23
2'	40	44	47	50	50	48	46	37	26	29	29	29	29	29	30	29
3'	48	52	55	55	55	53	46	39	33	35	35	35	37	35	35	33
4'	47	50	54	56	56	53	50	40	35	37	40	40	40	40	39	35
5'	46	49	53	54	54	55	50	45	36	38	39	39	39	39	39	39
6'	40	44	47	48	49	49	46	40	35	37	39	40	40	40	40	37
7'	36	38	41	43	43	43	39	35	32	33	35	35	36	36	37	33
8'	30	32	30	30	30	30	31	27	28	30	33	32	33	33	33	30
9'	24	26	30	30	30	30	30	26	25	28	28	30	30	31	30	29
10'	23	25	26	26	26	28	25	25	23	25	25	25	25	26	28	25

3' from wall, 3' on center

4' from wall, 4' on center

## Lamp Types

**Please note:** When ordering lamps, two are required for operation.

**PL-L 18W/830** 18W; 12000Hrs; 1250 Lumens; 82 CRI; 3000°K Color Temp

**PL-L 18W/835** 18W; 12000Hrs; 1250 Lumens; 82 CRI; 3500°K Color Temp

**PL-L 18W/841** 18W; 12000Hrs; 1250 Lumens; 82 CRI; 4100°K Color Temp

**F40/30BX/SPX30** 40W; 20000Hrs; 3150 Lumens; 82 CRI; 3000°K Color Temp

**F40/30BX/SPX35** 40W; 20000Hrs; 3150 Lumens; 82 CRI; 3500°K Color Temp

**F40/30BX/SPX41** 40W; 20000Hrs; 3150 Lumens; 82 CRI; 4100°K Color Temp

## Mounting Options

**Please note:** When ordering track adapters or the unistrut adapter for mounting, two are required to support the weight of the unit.

**T1**  
Track adapter for commercial grade 1 and 2-circuit track.

**TA2S**  
Track adapter for specification grade 2-circuit track.

**HTA2**  
Track adapter for specification grade 2-circuit 277-volt track.

## TA3

Track adapter for specification grade 3-circuit track.

## US1

Unistrut adapter.

## PC9M

Heavy duty pipe clamp for pipes up to 2" O.D.

## XTSA70

Monopoint canopy for specification grade 2 and 3-circuit track.

## CM4

6" Canopy for permanent mounting on standard 4" octagonal outlet boxes.

## Accessories

CC18                      Coil Cord

## Finish

B                      Black  
W                      White  
S                      Silver  
CC                      Custom Color