

Job Name:

Fixture Type:

Qty:

## Energy Efficient PAR by Times Square Lighting



### PBSK 35-75W PAR36/AR111


The PBSK is ideal for highlighting artwork, exhibits, and retail displays. Its compact design features an exposed PAR36 or AR111 lamp ranging from 35 to 75-watts. Beam spreads come in narrow spot to very wide flood, but will maintain an even field of illumination without producing hot spots or shadows.

The PBSK features an electronic transformer. It has an adjustment knob used to tighten its head in place and accessory-retaining clips that accept louvers, barn-doors, hoods and a variety of filters. Comes in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

#### Features:

- 120, 220 and 277-volt available
- Integral 12-volt dimmable transformer
- Accepts PAR36 and AR111 lamps from 35 to 75-watts
- Numerous mounting options and accessories

Manufactured in the USA - IBEW


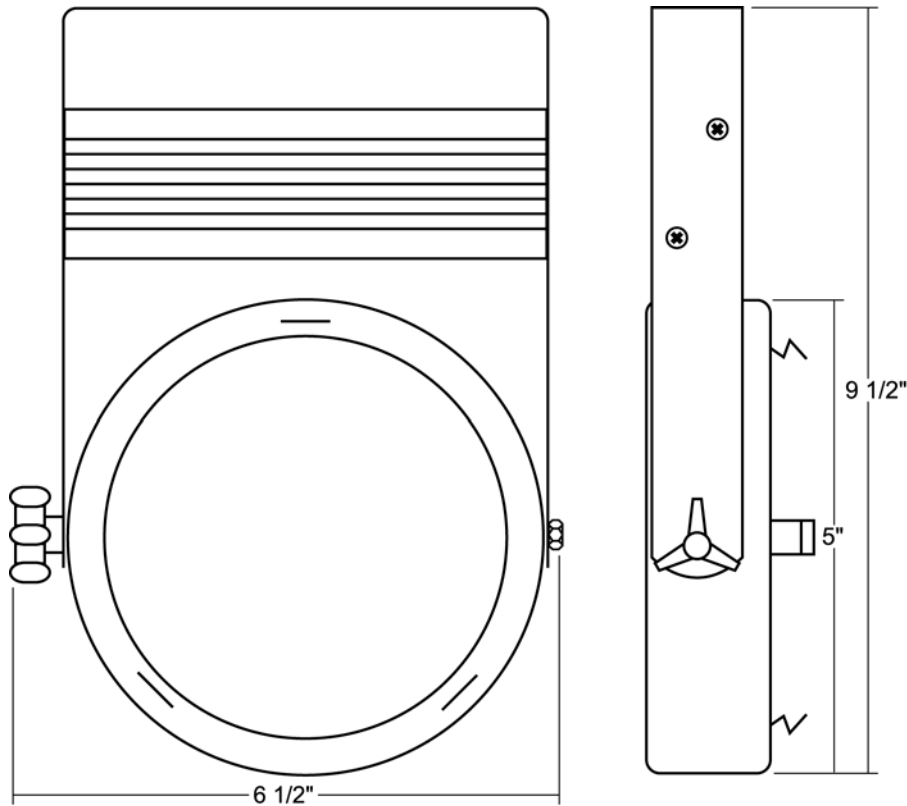


Last updated 03/10/2008.

Specify: PBSK - - -

	MODEL NUMBER	FINISH	MOUNTING (optional)	ACCESSORIES (optional)
Example:	PBSK	-B	-T1	-LV8

**Photometric Data**

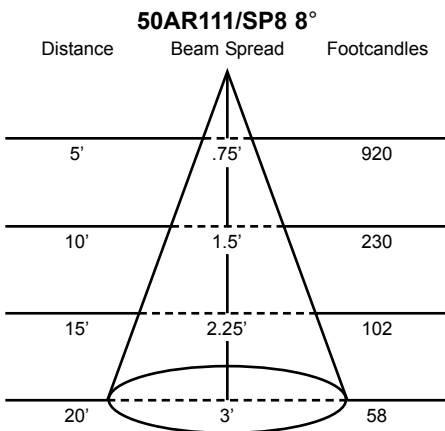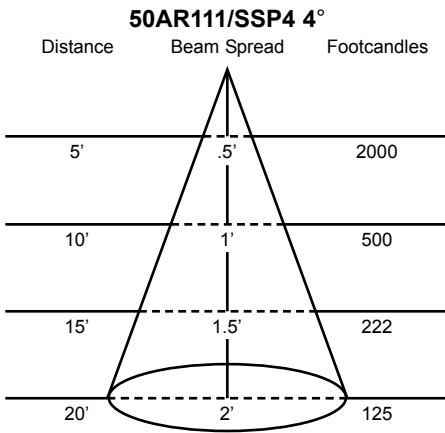

**50PAR36/H/FL30** 50W/12V; 4000Hrs; 30° Beam; 1300 CBCP; 3050°K Color Temp

**\*35AR111/SSP4** 35W/12V; 3000Hrs; 4° Beam; 40000 CBCP

**\*35AR111/SP8** 35W/12V; 3000Hrs; 8° Beam; 14000 CBCP

**\*35AR111/FL25** 35W/12V; 3000Hrs; 25° Beam; 2500 CBCP

**\*50AR111/SSP4** 50W/12V; 3000Hrs; 4° Beam; 45000 CBCP

**\*50AR111/SP8** 50W/12V; 3000Hrs; 8° Beam; 20000 CBCP

**\*50AR111/FL25** 50W/12V; 3000Hrs; 25° Beam; 4000 CBCP

**\*75AR111/SP8** 75W/12V; 3000Hrs; 8° Beam; 30000 CBCP

**\*75AR111/FL25** 75W/12V; 3000Hrs; 25° Beam; 5300 CBCP

**\*75AR111/WFL45** 75W/12V; 3000Hrs; 45° Beam; 2000 CBCP

\*Requires glass safety shield GS8.

**XTSA70**  
Monopoint canopy for specification grade 2 and 3-circuit track.

**CM4**  
6" Canopy for permanent mounting on standard 4" octagonal outlet boxes.

**TB4**  
6" Portable wall mount/table base for floor, wall or table use.

**Accessories**

LV8	Louver
HD8	Hood
GS8	AR111 Glass Shield
CF8	Color Frame
GF8	Glass Color Filter
DF8	Dichroic Color Filter
GF8-600	5°x50° Linear Lens
GF8-601	Beam Softener
GF8-673	50°x50° Spread Lens
GF8-702	UV Blocking Filter
CC18	Coiled Cord
SC-24	Safety Cable
DM	Integral Dimmer
WL	Wrench Locking

**Finish**

B	Black
W	White
S	Silver
CC	Custom Color

**Mounting Options**

**T1**  
Track adapter for commercial grade 1 and 2-circuit track.

**TA2S**  
Track adapter for specification grade 2-circuit track.

**HTA2**  
Track adapter for specification grade 2-circuit 277-volt track.

**TA3**  
Track adapter for specification grade 3-circuit track.

**US1**  
Unistrut adapter.

**MC**  
Medium duty pipe clamp for pipes up to 1 1/2" O.D.

**MN**  
Medium duty pipe clamp for pipes up to 2" O.D.

**PC9M**  
Heavy duty pipe clamp for pipes up to 2" O.D.

**Lamp Types**

**35PAR36/H/SP5** 35W/12V; 4000Hrs; 5° Beam; 25000 CBCP; 3050°K Color Temp

**35PAR36/H/SP8** 35W/12V; 4000Hrs; 8° Beam; 8000 CBCP; 3050°K Color Temp

**35PAR36/H/FL30** 35W/12V; 4000Hrs; 30° Beam; 900 CBCP; 3050°K Color Temp

**35PAR36/H/VWFL** 35W/12V; 4000Hrs; 3050°K Color Temp

**50PAR36/H/SP5** 50W/12V; 4000Hrs; 5° Beam; 39000 CBCP; 3050°K Color Temp

**50PAR36/H/SP8** 50W/12V; 4000Hrs; 8° Beam; 10000 CBCP; 3050°K Color Temp