

Manufactured in the USA - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

Features



- Accepts short neck PAR30 lamps and LEDs
- Available in 1 to 5-light - linear, square and corner configurations
- Blends into the ceiling and can be installed with or without trim
- Each lamp is individually mounted for pan and tilt.
- Lamp holders accept a variety of lenses and accessories
- Easy front re-lamping
- Thermal protector
- Adjustable trim with torsion springs for ceilings up to 2" thick
- Adjustable butterfly mounting brackets included
- Fully enclosed wiring compartment
- Black, white and silver trims available - custom colors upon request
- 120-volt

30R PAR30

Specification Sheet - New Construction



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

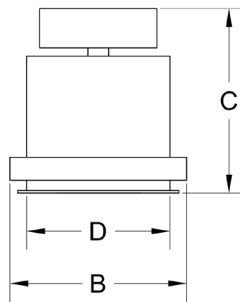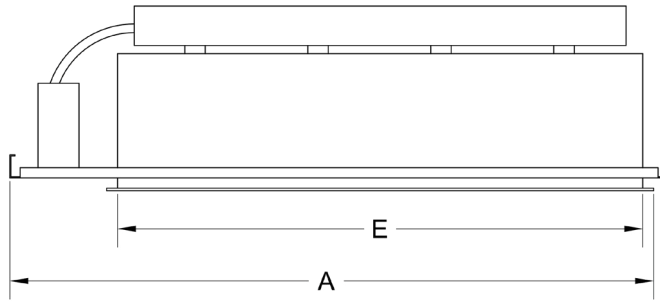

Model #	Length	Width	Height	Ceiling Cut-Out	
	(A)	(B)	(C)	(D)	(E)
30R-1	14 ³ / ₈ "	8 ³ / ₄ "	9 ¹ / ₄ "	7 ¹ / ₁₆ "	8"
30R-2	20 ¹ / ₄ "	8 ³ / ₄ "	9 ¹ / ₄ "	7 ¹ / ₁₆ "	13 ³ / ₈ "
30R-3	26 ¹ / ₈ "	8 ³ / ₄ "	9 ¹ / ₄ "	7 ¹ / ₁₆ "	19 ⁷ / ₈ "
30R-4	32 ¹ / ₈ "	8 ³ / ₄ "	9 ¹ / ₄ "	7 ¹ / ₁₆ "	25 ³ / ₄ "
30R-4S	19 ¹ / ₄ "	16 ¹ / ₂ "	7 ³ / ₈ "	12 ⁷ / ₈ "	13 ³ / ₄ "
30R-3L	19 ¹ / ₈ "	19 ¹ / ₈ "	7 ⁷ / ₈ "	6 ¹ / ₄ " x 13 ³ / ₈ "	13 ³ / ₈ " x 6 ¹ / ₄ "
30R-5L	25 ¹ / ₈ "	25 ¹ / ₈ "	7 ⁷ / ₈ "	6 ¹ / ₄ " x 19 ³ / ₈ "	19 ³ / ₈ " x 6 ¹ / ₄ "

Ordering Matrix

Model	# of Lamps	Voltage	Inside Finish	Trim Finish
30R	1 = 1-Linear 2 = 2-Linear 3 = 3-Linear 4 = 4-Linear 4S = 4-Square 3L = 3-Corner 5L = 5-Corner	120 = 120V	B = Black W = White S = Silver CC = Custom	B = Black W = White S = Silver CC = Custom

Maximum Ambient temperature: 35°C

Example: 30R-3-B-W-120

30R-_____ - _____ - _____ - _____

1-Linear 30R-1



2-Linear 30R-2



3-Linear 30R-3



4-Linear 30R-4




NOTE: These fixtures are not IC or Chicago Plenum Rated.


Accessories

GF40	Colored Glass
GF40-601	Beam Softener
GF40-600	5°x50° Linear
GF40-673	50°x50° Spread
GF40-702	UV Blocking
HD40	Snoot
XH40	Cross Baffle

4-Square 30R-4S

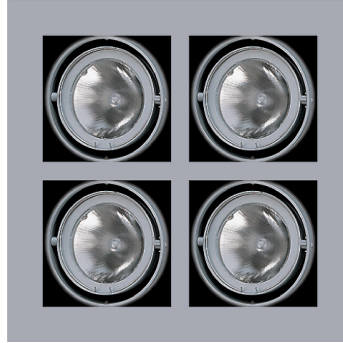

5-Corner 30R-5L

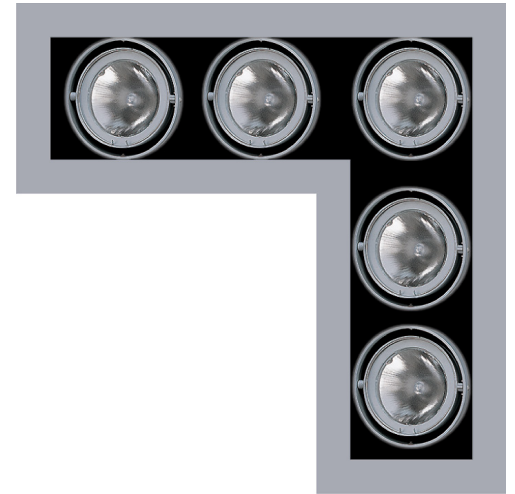

3-Corner 30R-3L

