

38R PAR38



Specification Sheet



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

Manufactured in the USA - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

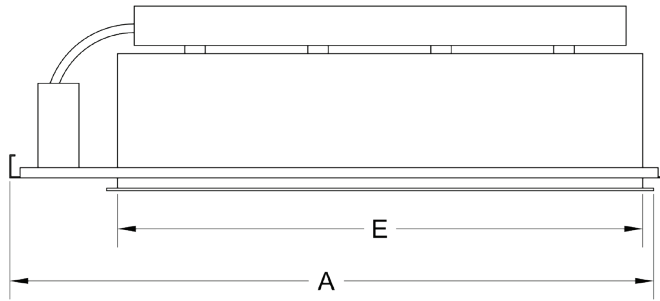

Features

- Accepts PAR38 lamps and LEDs
- Available in 1 to 5-light - linear, square and corner configurations
- Blends into the ceiling and can be installed with or without trim
- Each lamp is individually mounted for pan and tilt.
- Lamp holders accept a variety of lenses and accessories
- Easy front re-lamping
- Thermal protector
- Adjustable trim with torsion springs for ceilings up to 2" thick
- Adjustable butterfly mounting brackets included
- Fully enclosed wiring compartment
- Black, white and silver trims available - custom colors upon request
- 120-volt

Model #	Length	Width	Height	Ceiling Cut-Out	
	(A)	(B)	(C)	(D)	(E)
38R-1	14 ³ / ₈ "	8 ¹ / ₂ "	9"	6 ⁷ / ₈ "	8"
38R-2	21 ³ / ₈ "	8 ¹ / ₂ "	9"	6 ⁷ / ₈ "	13 ⁷ / ₈ "
38R-3	28 ¹ / ₄ "	8 ¹ / ₂ "	9"	6 ⁷ / ₈ "	19 ⁷ / ₈ "
38R-4	35 ¹ / ₈ "	8 ¹ / ₂ "	9"	6 ⁷ / ₈ "	25 ³ / ₄ "
38R-4S	21 ³ / ₈ "	21 ³ / ₈ "	9"	15 ³ / ₄ "	13 ³ / ₄ "
38R-3L	19 ¹ / ₈ "	16 ⁷ / ₈ "	9"	6 ⁷ / ₈ " x 15 ³ / ₄ "	15 ³ / ₄ " x 6 ⁷ / ₈ "
38R-5L	28 ¹ / ₄ "	28 ¹ / ₄ "	9"	6 ¹ / ₄ " x 22 ⁵ / ₈ "	22 ⁵ / ₈ " x 6 ⁷ / ₈ "

Ordering Matrix

Model	# of Lamps	Voltage	Inside Finish	Trim Finish
38R	1 = 1-Linear 2 = 2-Linear 3 = 3-Linear 4 = 4-Linear 4S = 4-Square 3L = 3-Corner 5L = 5-Corner	120 = 120V	B = Black W = White S = Silver CC = Custom	B = Black W = White S = Silver CC = Custom

Maximum Ambient temperature: 35°C

Example: 38R-3-B-W-120

38R-_____ - _____ - _____ - _____

*Specification sheets are subject to change without notice.


1-Linear 38R-1



2-Linear 38R-2




3-Linear 38R-3

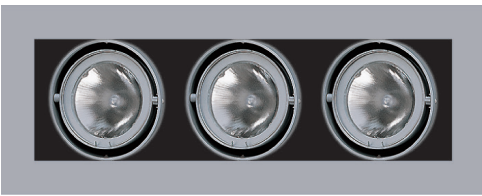


4-Linear 38R-4




4-Square 38R-4S

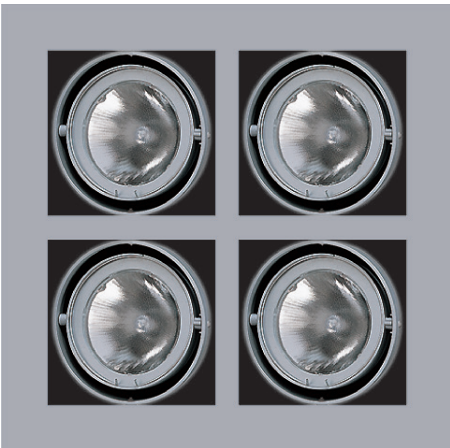

3-Corner 38R-3L

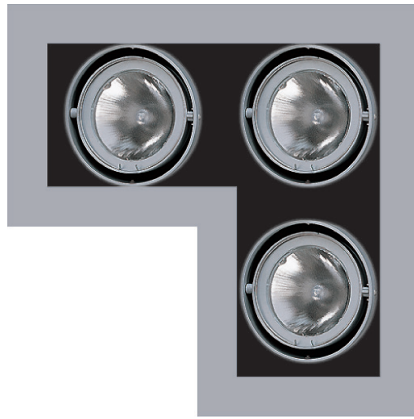

5-Corner 38R-5L

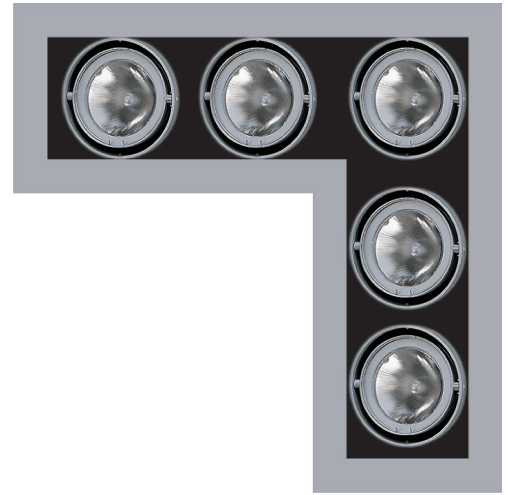

NOTE: These fixtures are not IC or Chicago Plenum Rated.

Accessories

GF41	Colored Glass
GF41-601	Beam Softener
GF41-600	5°x50° Linear
GF41-673	50°x50° Spread
GF41-702	UV Blocking
HD41	Snoot
XH41	Cross Baffle

Snap Accessories

01145	25° Beam Spreader Snap
01147	36° Beam Spreader Snap
01149	60° Beam Spreader Snap
01595	10°-36° Linear Snap
03261	10°-60° Linear Snap
01597	36°x36° Flat Top Snap
01151	40° Cutoff Louver
03257	20° Maximum Deflection Snap
01153	¼ Color Temperature Shift Snap
01155	½ Color Temperature Shift Snap
01157	¾ Color Temperature Shift Snap
03283	Enhance Snap
02185-C	Color Snap (Specify Color)

LED Lamp Types

Lamp Type	CCT	Watts	CRI	Lumens
Vivid	2700K	18.5	95	930
Vivid	3000K	18.5	95	1000
Brilliant	2700K	14	92	1190
Brilliant	3000K	14	92	1230