

ACT23S MOSAIC STUDIO

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The Mosaic Studio features tunable color with a high CRI output and passive cooling for silent operation in noise sensitive environments. Rich blues, ambers, reds, violets and greens can be added in gradients or can completely saturate the output of the light. Interchangeable reflectors allow beam angles between 10° and 60°. This fixture is perfect for noise sensitive environments such as studios, churches, museums and other quiet spaces.

FEATURES

- 2000 Lumen Output
- 5 DMX Channels
- Color Tuning: RGB+ Intensity+ CCT
- Tunable range: 1800K-6500K tunable white
- 84 - 95 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available
- Fanless (silent) operation

POWER

- Power Consumption: 31W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

OPTICS

- 10°, 20°, 40° or 60° field-changeable reflectors

WEIGHT

- 2 lbs.

CALIBRATED CCT SPECIFICATIONS

CCT [K]	TYPICAL CRI
1800 (min)	90
2700	93
3000	95
3500	95
4000	93
6500 (max)	84

EMITTER 5-YEAR WARRANTY


The warranty on the LED Emitter used in this Times Square Lighting product shall have a five year warranty from the date of purchase.

ACT23S MOSAIC STUDIO

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW


PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

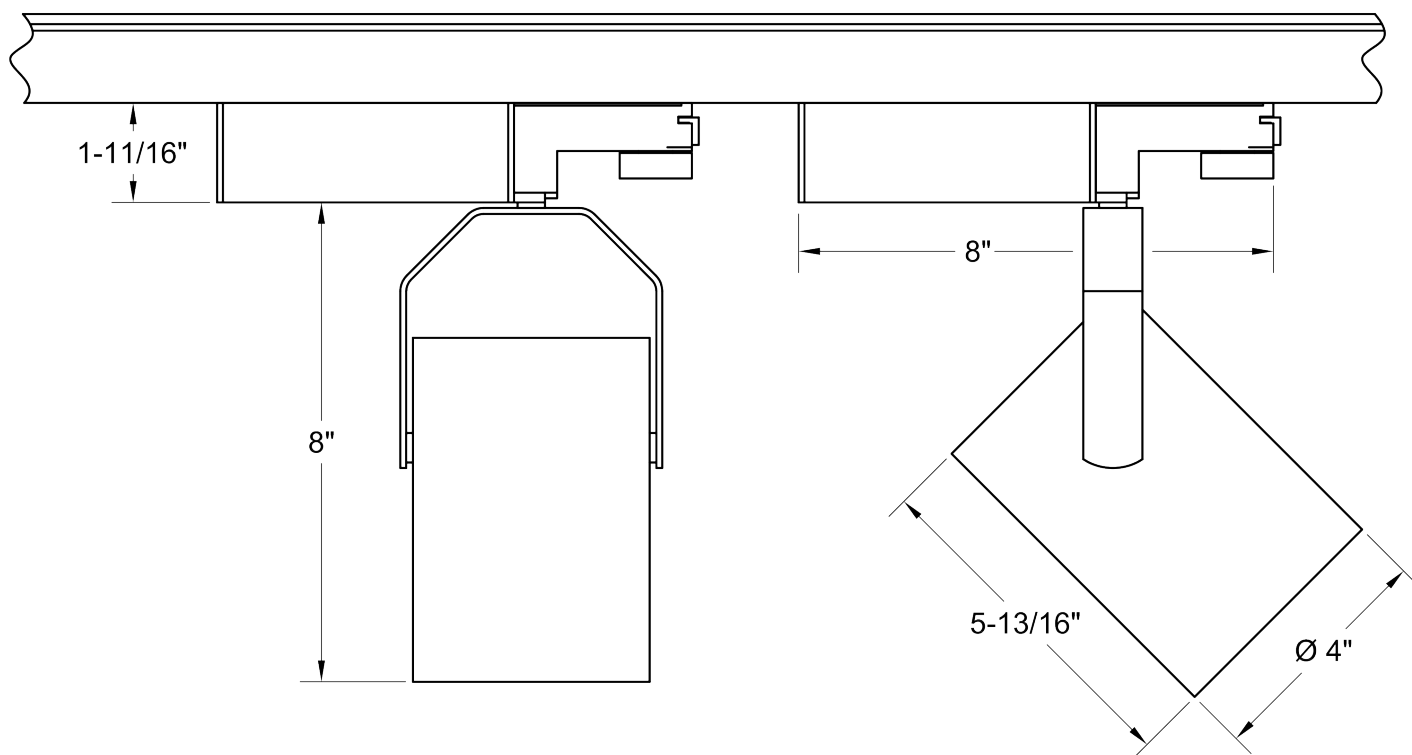

PHOTOMETRIC DATA


10° Spot Reflector

Distance	Beam Spread	Footcandles
5'	0.8'	290
7.5'	1.3'	129
10'	1.8'	73
12.5'	2.2'	46

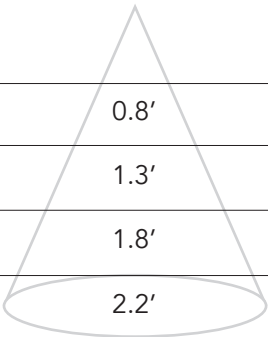


20° Spot Reflector

Distance	Beam Spread	Footcandles
5'	1.7'	240
7.5'	2.7'	107
10'	3.6'	60
12.5'	4.4'	38

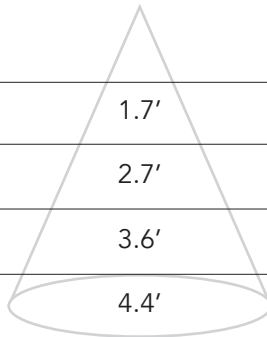


40° Spot Reflector

Distance	Beam Spread	Footcandles
5'	3.6'	140
7.5'	5.5'	62
10'	7.3'	35
12.5'	9.1'	22

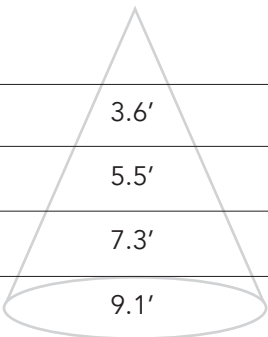

60° Spot Reflector

Distance	Beam Spread	Footcandles
5'	5.7'	80
7.5'	8.7'	36
10'	11.6'	20
12.5'	14.4'	13

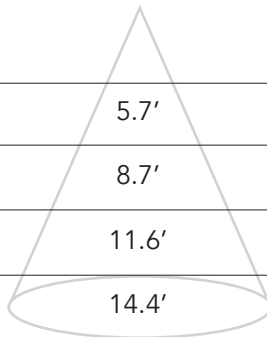

ACT23S MOSAIC STUDIO

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW



MOUNTING OPTIONS	ACCESSORIES																								
<p>N8: for DT2 2-circuit track adapter for SpecTrac databus, 120V.</p> <p>N9: for HDT2 2-circuit track adapter for SpecTrac databus, 227V.</p>	<table><tr><td>BD20</td><td>Barndoor</td></tr><tr><td>LV22</td><td>Full Size Louver</td></tr><tr><td>XL22</td><td>Full Size X Baffle Louver</td></tr><tr><td>XH22</td><td>Full Size X Baffle Hood</td></tr><tr><td>HD22</td><td>Hood/Snoot</td></tr><tr><td>X00517</td><td>Accessory Holder</td></tr><tr><td>LV18*</td><td>Honeycomb Louver</td></tr><tr><td>OF22-9101*</td><td>Smoothing Frost Filter</td></tr><tr><td>GF22-600*</td><td>5x50 Linear Lens</td></tr><tr><td>GF22-601*</td><td>Solite Softner</td></tr><tr><td>GF22-673*</td><td>50 x 50 Spread Lens</td></tr><tr><td>SC24</td><td>Safety Cable</td></tr></table> <p>* X00517 Required Not compatible with 10° reflector option.</p>	BD20	Barndoor	LV22	Full Size Louver	XL22	Full Size X Baffle Louver	XH22	Full Size X Baffle Hood	HD22	Hood/Snoot	X00517	Accessory Holder	LV18*	Honeycomb Louver	OF22-9101*	Smoothing Frost Filter	GF22-600*	5x50 Linear Lens	GF22-601*	Solite Softner	GF22-673*	50 x 50 Spread Lens	SC24	Safety Cable
BD20	Barndoor																								
LV22	Full Size Louver																								
XL22	Full Size X Baffle Louver																								
XH22	Full Size X Baffle Hood																								
HD22	Hood/Snoot																								
X00517	Accessory Holder																								
LV18*	Honeycomb Louver																								
OF22-9101*	Smoothing Frost Filter																								
GF22-600*	5x50 Linear Lens																								
GF22-601*	Solite Softner																								
GF22-673*	50 x 50 Spread Lens																								
SC24	Safety Cable																								
NOTES ON DIMMING																									

Visit tslight.com/resources or scan the QR Code.



SPECIFY:

MODEL	FINISH	OPTICS
ACT23S	B = Black W = White S = Silver CC = Custom Color	10 = 10° Degree 20 = 20° Degree 40 = 40° Degree 60 = 60° Degree
MOUNTING OPTIONS		DIMMING
See Mounting Options for Ordering Codes		DX = DMX / RDM CS = Casambi Wireless

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: ACT23S-B-60-N8-DX

MODEL	FINISH	OPTICS	MOUNTING OPTIONS	DIMMING