



Manufactured in the USA - IBEW



Features:

- Performance equivalent to 250W halogen PAR lamp
- Internal self-locking yoke
- Internal accessory holder
- Vented rear spinning
- Numerous mounting options
- Equipped with lens rotation and relamping handle
- Dimmable

LED

- Bulb Included
- **Color temp options:** 3000K
- **CRI:** 80
- No UV or IR

Dimming

- Trailing edge (ELV)
- Leading edge (Triac)

Electrical

- Electronic driver
- 100-120V, 50/60Hz
- Meets FCC 47 CFR Part 15/18 Requirements

L38 MAX


33W, 3000 LUMEN LED PAR38



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

The L38 Max is a rugged specification grade LED fixture that is capable of replacing 250-watt line voltage and 70-watt metal halide fixtures. Its light weight and small size make it ideal for interior spaces such as museums, exhibits, shops, residences and other areas where high-intensity light is needed.

Fixture features include an internal self-locking yoke, adjustable head and hinged front for easy re-lamping. Internal accessory holder accepts louvers, barndoors, hoods and a variety of filters. Available in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

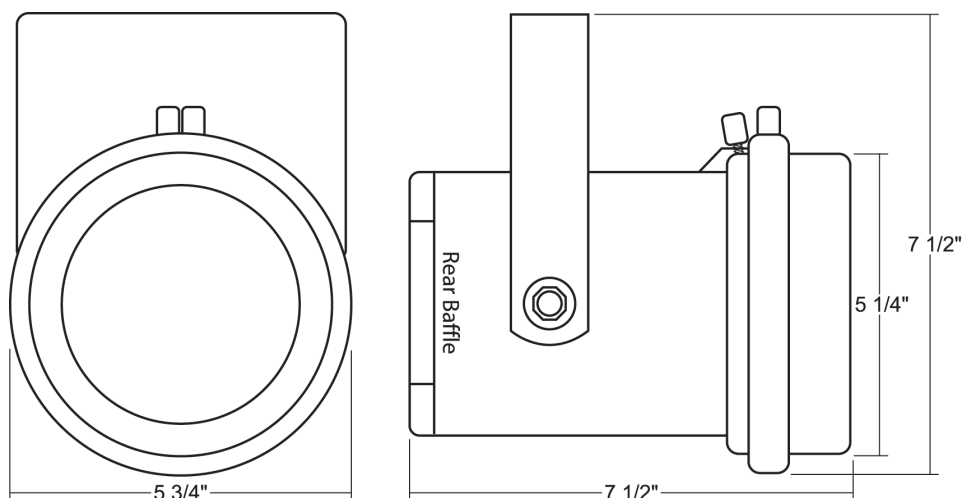

Lamp Type	Watts	CRI	Lumens*
Bright	33	80	3000

Ordering Matrix

Model	CRI	Color Temperature	Color	Optics	Mounting Options	Accessories
L38M	80	30 = 3000K	B=Black W=White S=Silver CC=Custom Color	15 = 15° 25 = 25°	See Mounting Options for Ordering Codes	See Accessory Options for Ordering Codes



Example: L38M-8030-B-15-ADI-LV6

L38M - _____ - _____ - _____ - _____ - _____

* Specification sheets are subject to change without notice.

Photometric Data

Photometric Data Coming Soon.

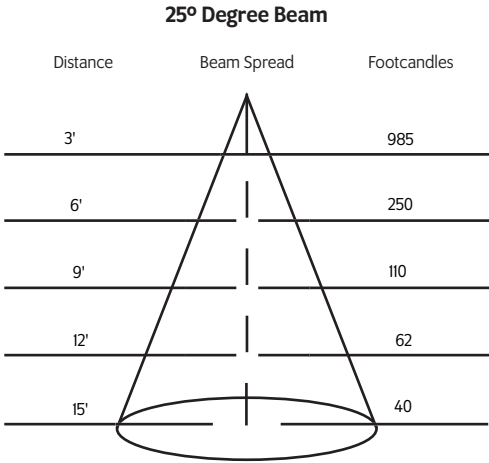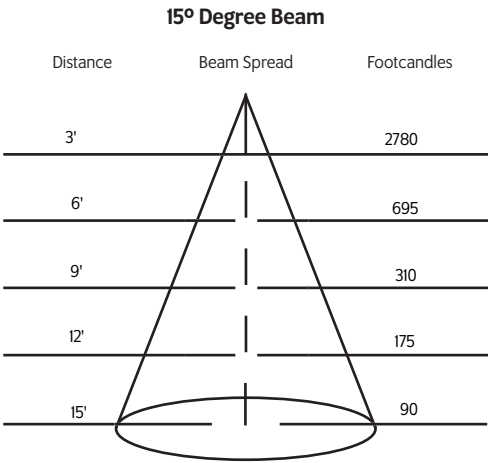

Mounting Options


AD1 Track adapter for commercial grade 1-circuit track. Good for use with small, lightweight fixtures.

T1 Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with larger, heavier fixtures.


DT2 Track adapter for SpecTrack 2-Circuit data track. 120V.

TA2 Track adapter for G-Series specification grade 2-circuit track. 120V.

TA3 Track adapter for G-Series specification grade 3-circuit track. 120V.



CM4 Canopy mount.

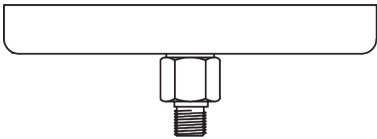

US1 6 5/8" x 1 1/2" Unistrut adapter.




TB4 6 1/4" Portable wall mount/table base floor, wall or table use.


TB8 8" x 8" Portable table base for floor or table use.



MC Light duty pipe clamp for small fixtures. For pipes up to 1 5/16" O.D.



MN Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.



PC9M Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.

Construction

- Extruded aluminum housing with black, white or silver finish
- 0-180° tilt, 360° rotation
- Locking yoke
- Accepts accessories
- **Weight:** 1.5 lbs.

Fixture Accessories

LV8	Louwer
XL8	Cross Baffle Louwer
BD7A	Barndoor
HD8	Hood
XH8	Cross Baffle Hood
SH8	Sparkle Hood
CF8	Color Frame
GF8	Glass Color Filter
DF8	Dichroic Color Filter
GF8-600	5° x 50° Linear Lens
GF8-601	Beam Softener
GF8-673	50° x 50° Spread Lens
CC18	Coiled Cord
SC-24	Safety Cable
IP	Integral Dimmer
WL	Wrench Locking

Dimming

IP Integral Pot Dimming

IES Files

Visit [tslight.com](https://www.tslight.com) to find comprehensive IES data.

Connector/Plug Types (Optional)

ED	Edison Connector
TL	Twist Lock Connector
SP	Storage Pin Connector