



TS851


18.5W PAR30 LED



5 Holt Drive
Stony Point, NY 10980
845-947-3034
info@tslight.com

Utilizing a fixed pantograph, this fixture is ideal for gallery or museum lighting or any application that requires a mixture of theatrical style and architectural function. The TS851 is a compact, theatrical style unit designed PAR30 LED lamps. The TS851 is ideal for lighting in galleries, museums and retail applications. Equipped with 4-way locking barn doors to control light spill and an internal accessory holder that accepts louvers and filters. Available in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

By utilizing Soraa's Snap System, there are unlimited possibilities for customizing this fixture. Options include the ability to field change the beam angle (Beam Spreader Snap), alter color temperature (CTO Snap), or to add a louver. Color Snaps can be used to produce brilliant hues of any color that Rosco or Lee offer.

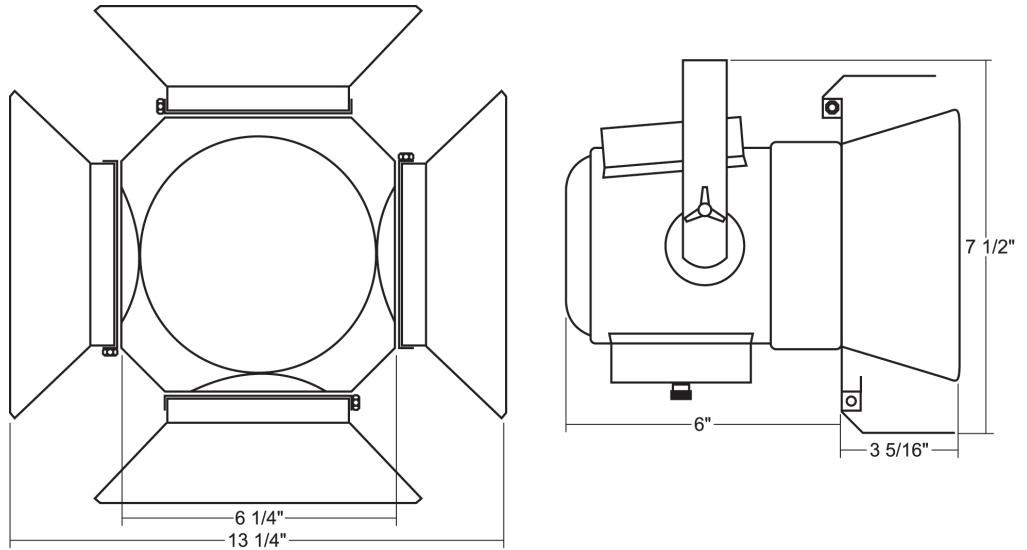

LED Lamp Types

Lamp Type	CCT	Watts	CRI	Lumens*
Vivid	2700K	18.5	95	930
Vivid	3000K	18.5	95	1000
Brilliant	2700K	14	92	1190
Brilliant	3000K	14	92	1230

Ordering Matrix

Model	CRI	Color Temperature	Color	Mounting Options	Accessories
TS851	95 85	27 = 2700K 30 = 3000K	B = Black W = White S = Silver CC = Custom Color	See Mounting Options	See Accessory Options

* All fixtures sold with 9° beam angle lamps - use Beam Spreaders to achieve desired angle.

Example: TS851-95-27-B-AD1-01145

TS851 - _____ - _____ - _____ - _____ - _____

Manufactured in the USA - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

SORAA
Simply Perfect Light™

Features


- Numerous mounting options and accessories
- Weight:** 2.7 lbs

LED

- 9° SORAA lamp included - use snaps to change the beam angle.
- Color temp options:** 2700K, 3000K
- CRI:** 85 or 95
- No UV or IR

Dimming*





- Trailing edge (ELV)
- Leading edge (Triac)

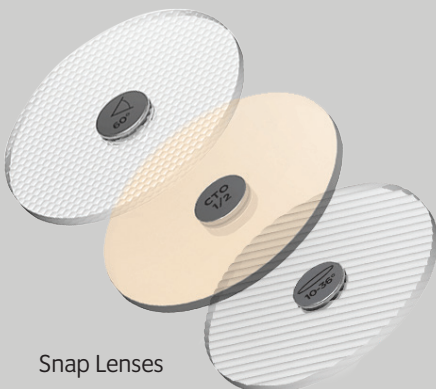

Snap Lenses

* Specification sheets are subject to change without notice.


Photometrics

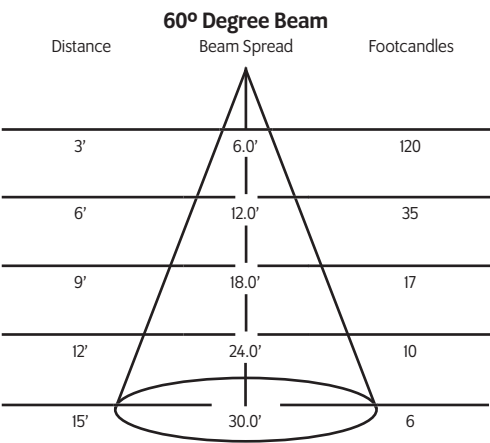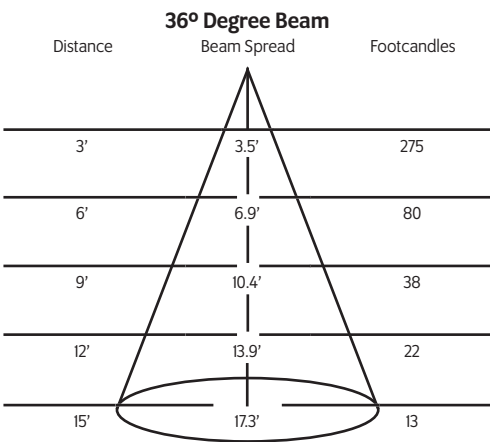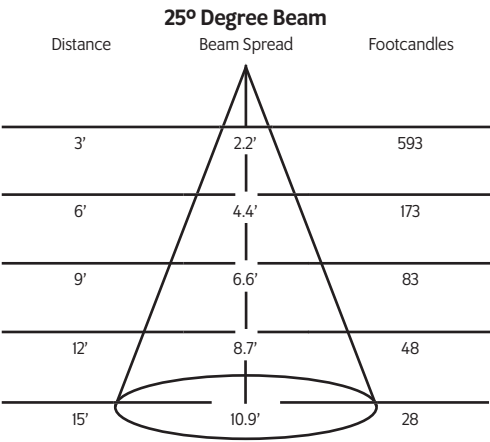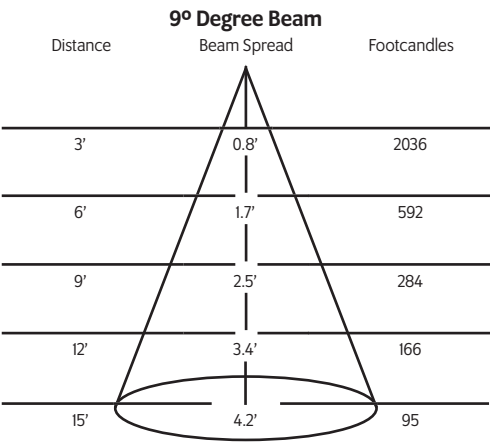

* Testing done on 3000K unit: Lumen output changes based on color temperature.

Mounting Options


- AD1** Track Adapter for commercial grade 1-circuit track. 120V. For use with lightweight fixtures.
- TA1** Track adapter for E-Series specification grade track. 1 circuit. 120V.
- TA2** Track adapter for G-Series specification grade 2-circuit track. 120V.
- TA3** Track adapter for G-Series specification grade 3-circuit track. 120V.

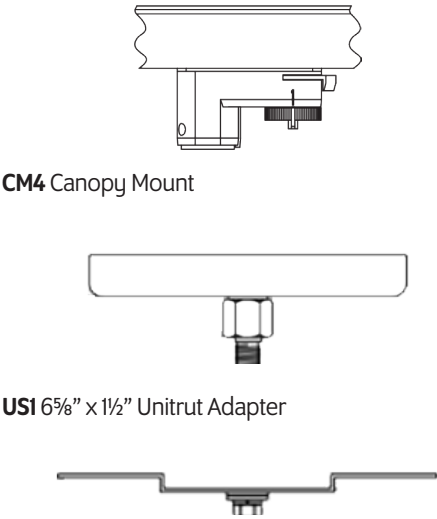

TB4 6¼" Portable wall mount/table base floor, wall or table use.



- MC** Light duty pipe clamp for small fixtures. For pipes up to 1 5/16" O.D.
- MN** Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

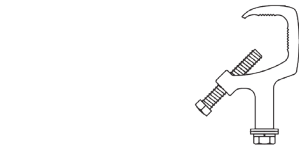

Accessories

- | | |
|-----------------|-----------------------|
| LV17 | Louwer |
| CF17 | Color Frame |
| GF17 | Glass Color Filter |
| DF17 | Dichroic Color Filter |
| GF17-600 | 5°x50° Linear Lens |
| GF17-601 | Beam Softener |
| GF17-673 | 50°x50° Spread Lens |
| GF17-703 | UV Blocking Filter |
| CC18 | Coiled Cord |
| SC-24 | Safety Cable |
| IP | Integral Dimmer |

Snap Accessories

- | | |
|----------------|--------------------------------|
| 01145 | 25° Beam Spreader Snap |
| 01147 | 36° Beam Spreader Snap |
| 01149 | 60° Beam Spreader Snap |
| 01595 | 10°-36° Linear Snap |
| 03261 | 10°-60° Linear Snap |
| 01597 | 36°X36° Flat Top Snap |
| 01151 | 40° Cutoff Louver |
| 03257 | 20° Maximum Deflection Snap |
| 01153 | ¼ Color Temperature Shift Snap |
| 01155 | ½ Color Temperature Shift Snap |
| 01157 | ¾ Color Temperature Shift Snap |
| 03283 | Enhance Snap |
| 02185-C | Color Snap (Specify Color) |
| CC18 | Coil Cord |

Extension Wands

- | | |
|--------------|---------------|
| SP 12 | 12" Stem |
| SP 18 | 18" Stem |
| SP 24 | 24" Stem |
| SP X | Custom Length |

Finish

- | | |
|-----------|--------------|
| B | Black |
| W | White |
| S | Silver |
| CC | Custom Color |