

E36BD4

THEATRICAL AR111 WITH BARNDOORS

MANUFACTURED IN THE UNITED STATES - IBEW



The **E36BD4** is a theatrical-style unit ideal for exhibit groups, clubs, theatrical venues or wherever a durable economical fixture is required. This steel, single-spun unit can accept AR111 low voltage lamps and LED's. The E36BD4 comes equipped with 4-way locking barndoors to control light spill and an internal accessory holder that accepts louvers and filters.

FEATURES

- Theatrical design
- Locking barndoors
- 120, 220 and 277-volt available
- Use with electronic low voltage (ELV) Dimmer only (AKA Trailing Edge and Reverse Phase)
- Integral 12-volt dimmable transformer
- Accepts AR111 lamps and LED's
- Numerous mounting options and accessories
- Weight: 2.6 lbs

LAMP TYPE	WATTS	CRI	LUMENS
Vivid	12.5	95	575
Vivid	12.5	95	575

SNAP ACCESSORIES

01145	25° Beam Spreader Snap
01147	36° Beam Spreader Snap
01149	60° Beam Spreader Snap
01595	10°-36° Linear Snap
03261	10°-60° Linear Snap
01597	36°X36° Flat Top Snap
01151	40° Cutoff Louver
03257	20° Maximum Deflection Snap
01153	1/4 Color Temperature Shift Snap
01155	1/2 Color Temperature Shift Snap
01157	3/4 Color Temperature Shift Snap
03283	Enhance Snap
02185-C	Color Snap (Specify Color)



EXTENSION WANDS

SP 12	12" Stem
SP 18	18" Stem
SP 24	24" Stem
SP X	Custom Length

E36BD4

THEATRICAL AR111 WITH BARNDOORS


MANUFACTURED IN THE UNITED STATES - IBEW

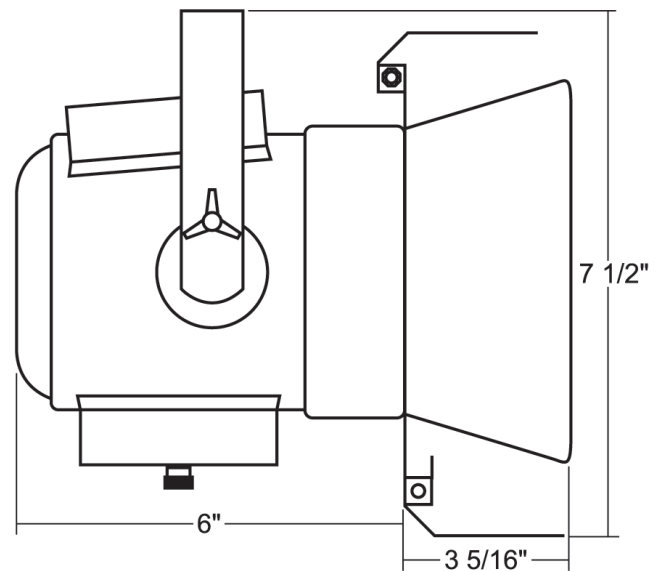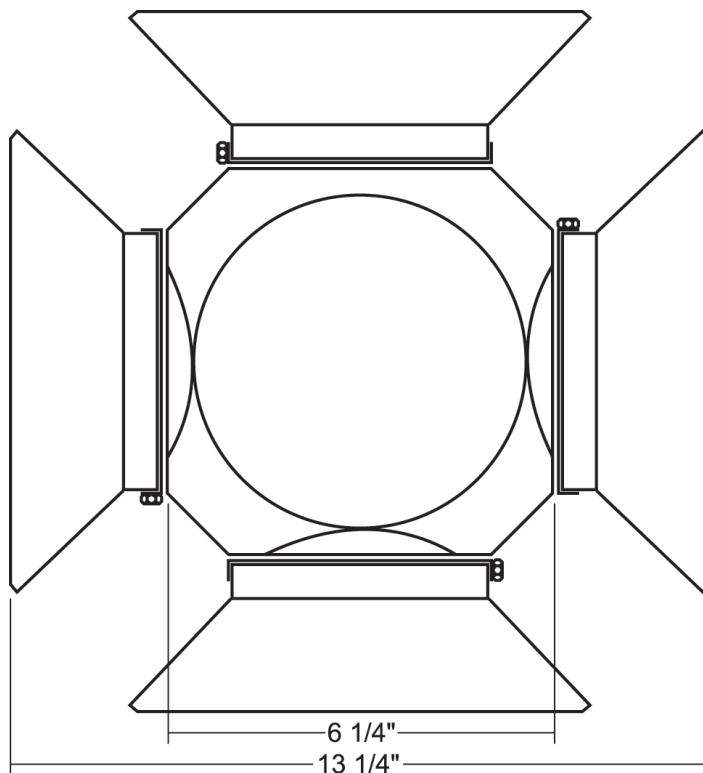

PHOTOMETRIC DATA


9° Degree Beam

Distance	Beam Spread	Footcandles
3'	0.8'	2436
6'	1.7'	717
9'	2.5'	344
12'	3.4'	201
15'	4.2'	115




25° Degree Beam

Distance	Beam Spread	Footcandles
3'	2.2'	552
6'	4.4'	161
9'	6.6'	77
12'	8.7'	45
15'	10.9'	26




36° Degree Beam

Distance	Beam Spread	Footcandles
3'	3.5'	255
6'	6.9'	74
9'	10.4'	36
12'	13.9'	21
15'	17.3'	12



60° Degree Beam

Distance	Beam Spread	Footcandles
3'	6'	112
6'	12'	33
9'	18'	16
12'	24'	9
15'	30'	5



E36BD4

THEATRICAL AR111 WITH BARNDOORS

MANUFACTURED IN THE UNITED STATES - IBEW

MOUNTING OPTIONS	ACCESSORIES																								
AD1 Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with Lightweight fixtures. T1 Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with larger, heavier fixtures. TA1 / TE2 (2-circuit) Track adapter for E-Series specification grade track. 1 or 2 circuit. 120V. TA3 Track adapter for G-Series specification grade 3-circuit track. 120V. CM4 Canopy mount. US1 6 5/8" x 1 1/2" Unistrut adapter. TB4 6 1/4" Portable wall mount/table base floor, wall or table use. MC Light duty pipe clamp for small fixtures. For pipes up to 1 5/16" O.D. MN Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.	<table><tr><td>LV17</td><td>Louver</td></tr><tr><td>CF17</td><td>Color Frame</td></tr><tr><td>GF17</td><td>Glass Color Filter</td></tr><tr><td>GF17-C</td><td>AR111 Glass Shield</td></tr><tr><td>DF17</td><td>Dichroic Color Filter</td></tr><tr><td>GF17-600</td><td>5°x50° Linear Lens</td></tr><tr><td>GF17-601</td><td>Beam Softener</td></tr><tr><td>GF17-673</td><td>50°x50° Spread Lens</td></tr><tr><td>GF17-703</td><td>UV Blocking Filter</td></tr><tr><td>CC18</td><td>Coiled Cord</td></tr><tr><td>SC-24</td><td>Safety Cable</td></tr><tr><td>IP</td><td>Integral Dimmer</td></tr></table>	LV17	Louver	CF17	Color Frame	GF17	Glass Color Filter	GF17-C	AR111 Glass Shield	DF17	Dichroic Color Filter	GF17-600	5°x50° Linear Lens	GF17-601	Beam Softener	GF17-673	50°x50° Spread Lens	GF17-703	UV Blocking Filter	CC18	Coiled Cord	SC-24	Safety Cable	IP	Integral Dimmer
LV17	Louver																								
CF17	Color Frame																								
GF17	Glass Color Filter																								
GF17-C	AR111 Glass Shield																								
DF17	Dichroic Color Filter																								
GF17-600	5°x50° Linear Lens																								
GF17-601	Beam Softener																								
GF17-673	50°x50° Spread Lens																								
GF17-703	UV Blocking Filter																								
CC18	Coiled Cord																								
SC-24	Safety Cable																								
IP	Integral Dimmer																								
	NOTES ON DIMMING Visit tslight.com/resources or scan the QR Code. 																								

SPECIFY:

MODEL	FINISH	MOUNTING (OPTIONAL)	ACCESSORIES (OPTIONAL)
E36BD4	B = Black W = White S = Silver CC = Custom Color	See Mounting Options for Ordering Codes	See Accessory Options for Ordering Codes

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: E36BD4-B-TA2-LV17

MODEL	FINISH	MOUNTING (OPTIONAL)	ACCESSORIES (OPTIONAL)
E36BD4			