

TEMPEST 120

IP RATED PROJECTOR WITH GOBO ROTATOR



The Tempest 120 LED projector is able to project both static or rotating images. This powerful little projector can utilize over 3400 stock patterns (gobos). You can also create your own images by simply sending us a PDF. Black and white, or full color images can be duplicated.

The Tempest can be installed both indoors or outdoors. The unit is ideal for Retail, Clubs, Restaurants, and Show Rooms. The Tempest 120 can be controlled in Manual mode or a DMX adapter can be added.

MECHANICAL SPECIFICATIONS

- Dimensions: 13.4" L x 9.8" H x 5.5' W x 3.9"
- Weight: 3.5 lbs. (1.6kg)
- Front: Tamper Resistant Plexiglass
- Finish: White or Black Powder Coat

LED SPECIFICATIONS / OPTICS

- Lumens: 2,800 lm
- Color Temperature: 6,500K
- Gobo Image: Project Static and/or Rotating Gobo Patterns. Choose from over 3,400 Patterns in the Gobo Collection or Custom Image.
- Gobo Size: Static: 44mm; Rotating: 50mm
- Lens: 27.5° Standard; Optional 16°, 20°, 38.5°, 50°
- Focus: Manual

ELECTRICAL


- Power Consumption: 120W
- Power Input: Main's Adapter 19V at 5A (not IP65)
- Voltage: 110 - 240V ~ 50/60Hz

LISTING

- IP65; Suitable for Outdoor Use
- Agency Certifications Pending
- UL Listed Power Supply

TEMPEST 120


IP RATED PROJECTOR WITH GOBO ROTATOR

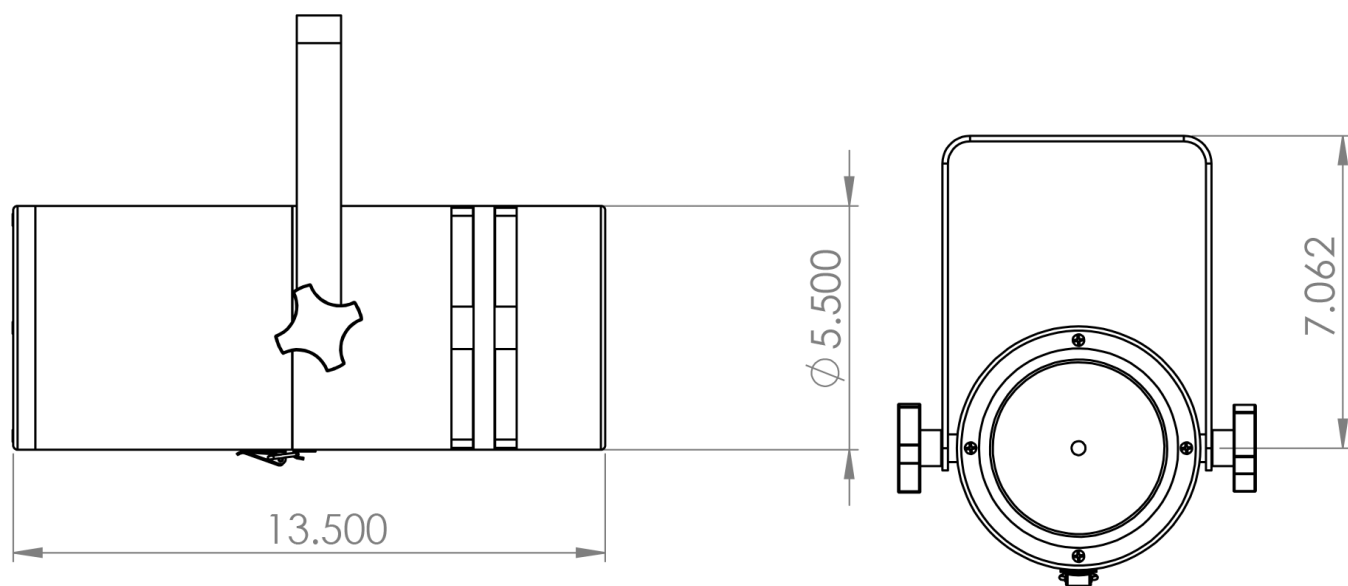

PHOTOMETRIC DATA


18° Degree Beam

Distance	Beam Spread	Footcandles
10'	3'7"	194
15'	5'4"	86
20'	7'1"	49
25'	8'10"	31




28° Degree Beam

Distance	Beam Spread	Footcandles
10'	5'4"	97
15'	8'	43
20'	10'9"	24
25'	13'5"	16



39° Degree Beam

Distance	Beam Spread	Footcandles
10'	7'4"	48
15'	11"	21
20'	14'8"	12
25'	18'2"	6



TEMPEST 120

IP RATED PROJECTOR WITH GOBO ROTATOR

MOUNTING OPTIONS

T1 Track Adapter for commercial grade 1-circuit track. 120V.

GAC 3-Circuit track adapter for databus pulse track. 120V.

TA2 Track adapter for G-Series specification grade 2-circuit track.

DT2 Track adapter for SpecTrack 2-Circuit data track.

TA3 Track adapter for G-Series specification grade 3-circuit track. 120V.

CM4 Canopy Mount

US1 6-5/8" x 1-1/2" Unistrut Adapter

TB4 Table Base for lightweight fixtures can be mounted to any flat surface. Fixture mounting bolt is 1/4"-20 TPI x 1/2".

MN Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

ACCESSORIES

SPE	Stock Pattern Steel
CPE	Custom Pattern Steel
GPE	Custom Pattern Glass
TEMP18	18° Lens Tube
TEMP28	28° Lens Tube
TEMP39	39° Lens Tube
TEMPDMX	DMX Module


NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



PATTERNS

For standard and custom patterns, see the pattern specification sheet. QR Code is provided below.

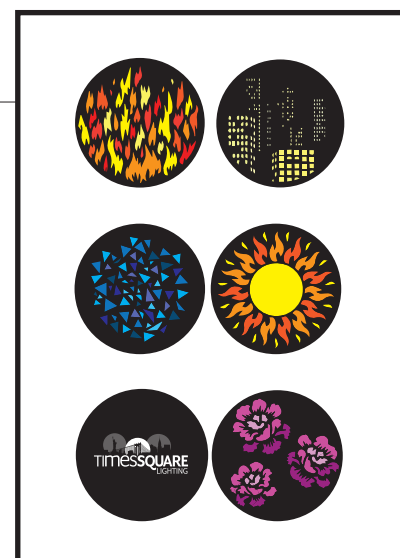

SPECIFY:

MODEL	FINISH	VOLTAGE
TEMP120	B = Black W = White	120 240
LENS	ACCESSORIES	
18 = 18° 28 = 28° 39 = 39°	See Accessory Options for Ordering Code	

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: TEMP120-B-120-28-SPE

MODEL	FINISH	VOLTAGE	LENS	ACCESSORIES
TEMP120				