

DV DaVINCI SERIES

1600 LUMEN MAX 98 CRI TRACK LIGHT

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The DaVinci Series features a high-CRI output and can accommodate numerous accessories. It allows the lighting designer to add glare reduction with louvers, barndoors, or snoots. The twist-lock TIR optics provide a smooth beam, including a tight 14° spot, and are easily field changeable.

LED SPECIFICATIONS

- Cree XLamp LED array
- Color Temperature Options: 2700K, 3000K
- CRI: 98 CRI
- Lumen Maintenance: 90% of initial lumen output at 33,000 hours on LM-80 testing
- No UV or IR

MODEL	CRI	TOTAL WATTAGE*	LUMENS	EFFICACY (LM/W)
DV8	98	8.2	800	98
DV10	98	10.0	1000	100
DV12	98	11.5	1200	104
DV14	98	13.2	1400	106
DV16	98	15.5	1600	103

* Total wattage equals LED plus driver. Delivered lumen may vary depending on LED module, color temperature, optics, and accessories. Testing done with 3000K LED array.

OPTICS

- 14°, 16°, 25°, and 35° Field-changeable TIR optics
- Zoom Optic: 15° to 40°

CONSTRUCTION

- Steel & aluminum housing with black, white or silver finish
- Accepts up to 3 accessories
- Weight: 3 lbs.

ELECTRICAL

- Integral electronic driver
- 100-277V, 50/60Hz
- Meets FCC 47 CFR Part 15/18 Requirements

OPTICS

- Trailing edge (ELV): 120V only
- Leading edge (Triac): 120V only
- 0-10V: 120 or 277 ControlTrac or Canopy Mount Only
- **Lutron: Consult Factory for details.**

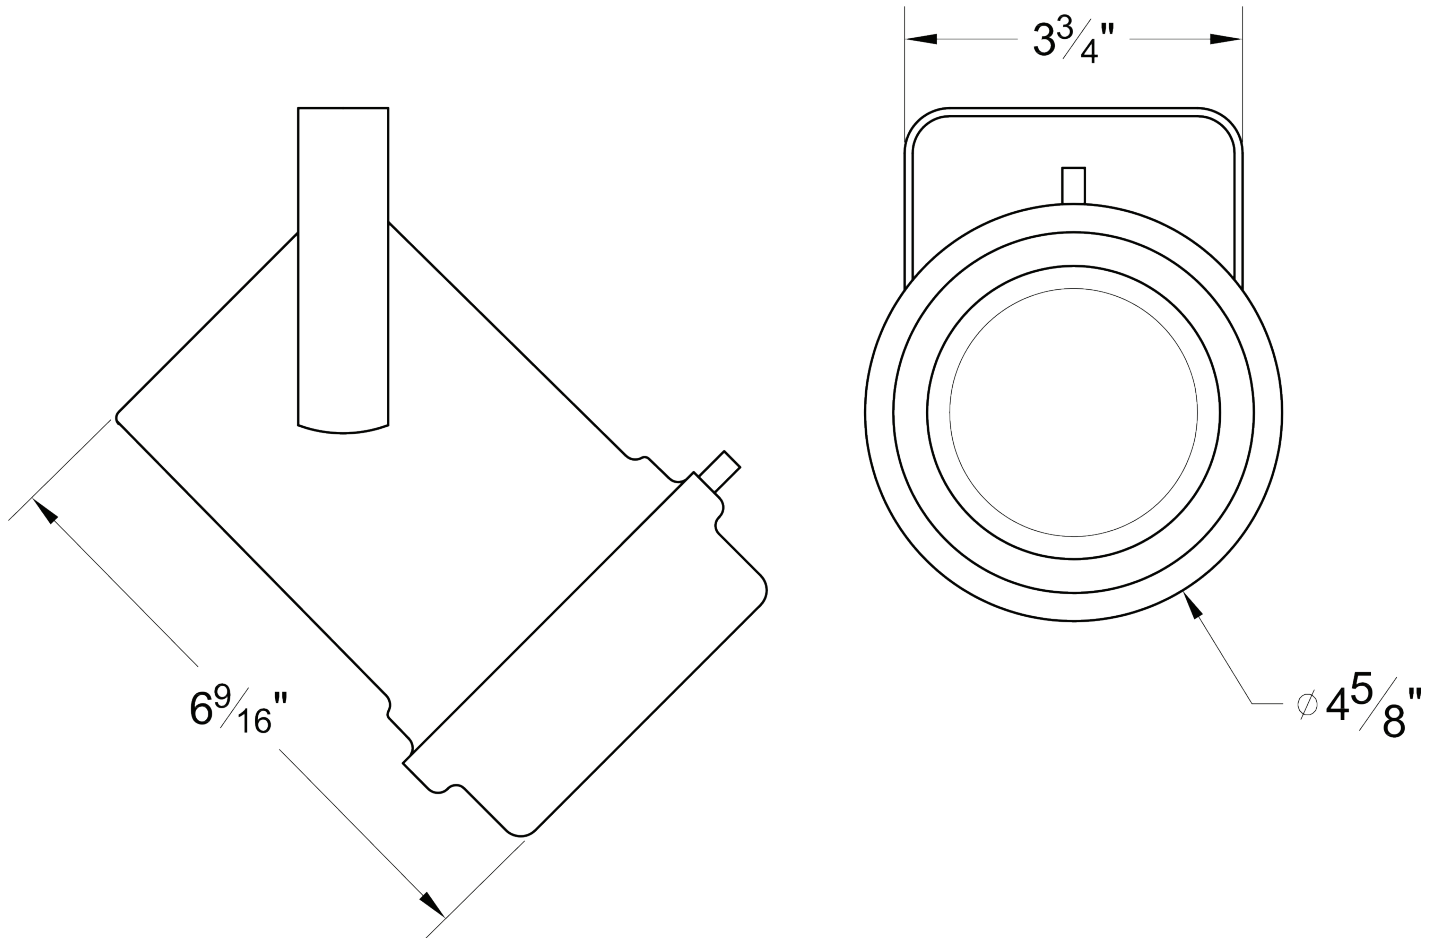
DV DaVINCI SERIES

1600 LUMEN MAX 98 CRI TRACK LIGHT

MANUFACTURED IN THE UNITED STATES - IBEW

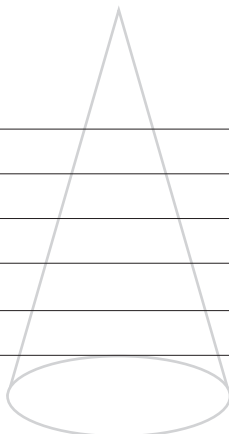


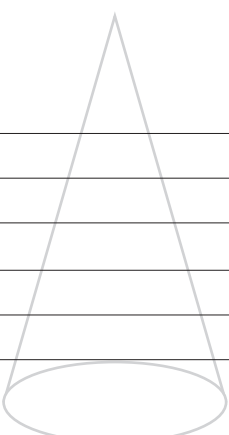
PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

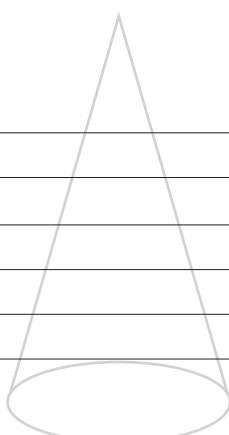


PHOTOMETRIC DATA

Distance	14° TIR Beam Spread	Footcandles				
		DV8	DV10	DV12	DV14	DV16
5'		277	345	414	497	552
7.5'		124	153	184	221	245
10'		69	86	104	124	138
12.5'		44	55	66	79	88
15'		32	38	46	55	61
17.5'		23	28	34	41	45
20'		18	21	26	32	35

Distance	16° TIR Beam Spread	Footcandles				
		DV8	DV10	DV12	DV14	DV16
5'		223	279	335	401	446
7.5'		99	124	149	178	198
10'		56	70	84	101	112
12.5'		36	44	53	64	71
15'		25	32	38	45	50
17.5'		18	23	27	32	36
20'		14	18	21	25	28

Distance	25° TIR Beam Spread	Footcandles				
		DV8	DV10	DV12	DV14	DV16
5'		134	168	201	241	268
7.5'		60	74	89	107	119
10'		34	42	50	60	67
12.5'		22	27	32	39	43
15'		15	19	23	27	30
17.5'		11	14	17	20	22
20'		9	11	13	15	17

Distance	35° TIR Beam Spread	Footcandles				
		DV8	DV10	DV12	DV14	DV16
5'		53	66	80	95	106
7.5'		24	29	35	42	47
10'		14	17	20	24	27
12.5'		9	11	13	15	17
15'		6	8	9	11	12
17.5'		5	6	7	8	9
20'		3	4	5	6	7

DV DaVINCI SERIES

1600 LUMEN MAX 98 CRI TRACK LIGHT

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

MOUNTING OPTIONS

DT2 2-Circuit track adapter for SpecTrack Databus. 120V.

HDT2 Track adapter for SpecTrack 2-Circuit data track. 277V.

AD1 Track adapter for commercial grade 1 and 2-Circuit track. This adapter is Halo™ and Times Square compatible. 120V.

TA2 Track adapter for G-Series specification grade 2-circuit track. 120V.

HTA2 Track adapter for G-Series specification grade 2-circuit track. 277V.

TA3 Track adapter for G-Series specification grade 3-circuit track. 120V.

CM4 Canopy Mount

US1 6-5/8" x 1-1/2" Unitrutt Adapter

TB8 8" x 8" Portable table base for floor and table use

MC Light duty pipe clamp for small fixtures. For pipes up to 1 5/16" O.D.

MN Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

PC9M Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.

ACCESSORIES

LV6	Louver
XL6	Cross Baffle Louver
BD10	Barndoor
HD6	Hood
XH6	Cross Baffle Hood
SH6	Sparkle Hood
CF10	Color Frame
GF10	Glass Color Filter
DF10	Dichroic Color Filter
GF10-600	5°x50° Linear Lens
GF10-601	Beam Softener
GF10-673	50°x50° Spread Lens
GF10-702	UV Blocking Filter
CC18	Coiled Cord
SC-24	Safety Cable
IP	Integral Dimmer
WL	Wrench Locking

EXTENSION WANDS

SP 12	12" Stem
SP 18	18" Stem
SP 24	24" Stem
SP X	Custom Length

NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



SPECIFY:

MODEL		LUMENS	CRI	
DV		8 = 800 10 = 1000 12 = 1200 14 = 1400 16 = 1600	98	
COLOR TEMPERATURE		FINISH	VOLTAGE	
27 = 2700K 30 = 3000K		B = Black W = White S = Silver CC = Custom Color	120 240 277	
OPTICS	MOUNTING	DIMMING †		ACCESSORIES
14 = Real Spot 16 = Smooth Spot 25 = Narrow Flood 35 = Medium Flood ZO = Zoom Optic	See Mounting Options for Ordering Codes	TE = Trailing Edge LE = Leading Edge 010 = 0-10V ND = Non-Dimming		See Accessory Options for Ordering Codes

Maximum Ambient Temperature: 35°C
Maximum Operating Angle: 45° from vertical

† See "Notes on Dimming"

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: DV-8-98-27-B-120-14-TA2-TE-LV6

MODEL	LUMENS	CRI	COLOR TEMPERATURE	FINISH	VOLTAGE	OPTICS	MOUNTING	DIMMING	ACCESSORIES
DV									