

ACT23 MOSAIC FLOOD

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The Mosaic Flood combines tunable color from 1800K to 6500K with high CRI output. Rich blues, ambers, reds, violets and greens can be added in gradients or can completely saturate the output of the light. Interchangeable reflectors allow beam angles between 25° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

FEATURES

- 2000 Lumen Output
- 5 DMX Channels
- Color Tuning: RGB+ Intensity+ CCT
- Tunable range: 1800K-6500K tunable white
- 84 - 95 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available

POWER

- Power Consumption: 31W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

OPTICS

- 25°, 35°, 40°, 50°, 60°, and 25°-45° Zoom field-changeable reflectors

WEIGHT

- 2 lbs.

CALIBRATED CCT SPECIFICATIONS

CCT [K]	TYPICAL CRI
1800 (min)	90
2700	93
3000	95
3500	95
4000	93
6500 (max)	84

ACT23 MOSAIC FLOOD


COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW


PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY




DXTC - CANOPY MOUNT WITH TERMINAL BLOCK FOR DMX

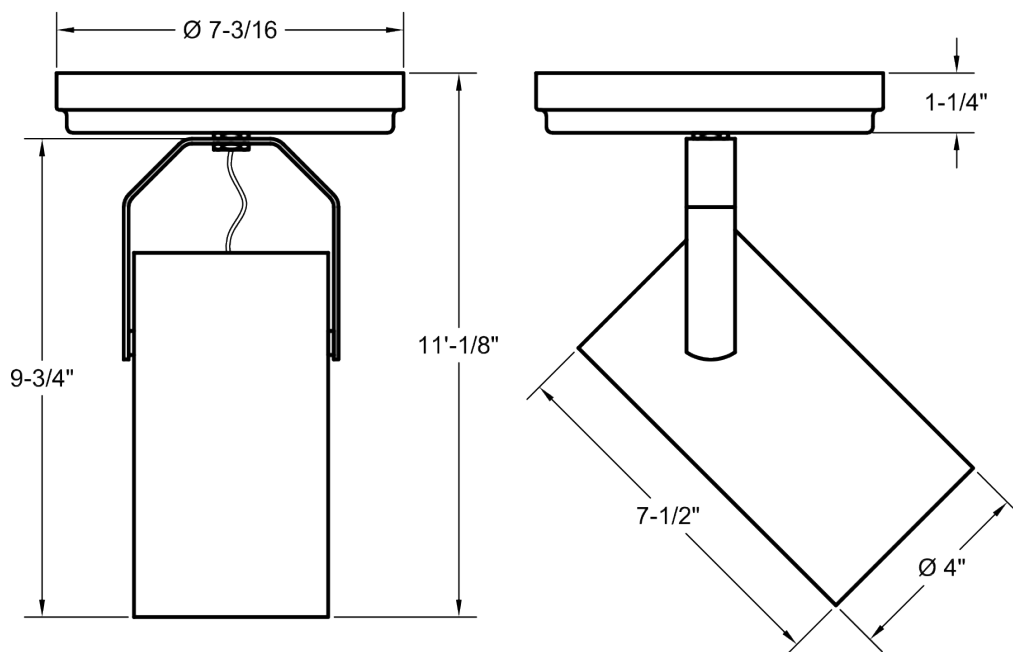


CM4 CANOPY MOUNT FOR CASAMBI WIRELESS

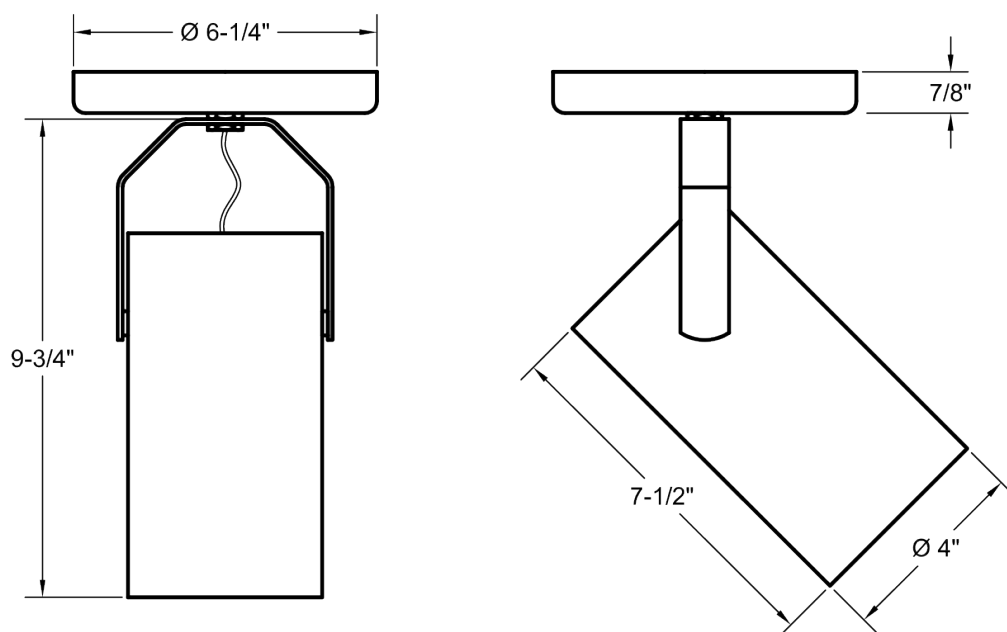

DT2, HDT2 AND GAC TRACK ADAPTERS FOR DMX OR CASAMBI WIRELESS

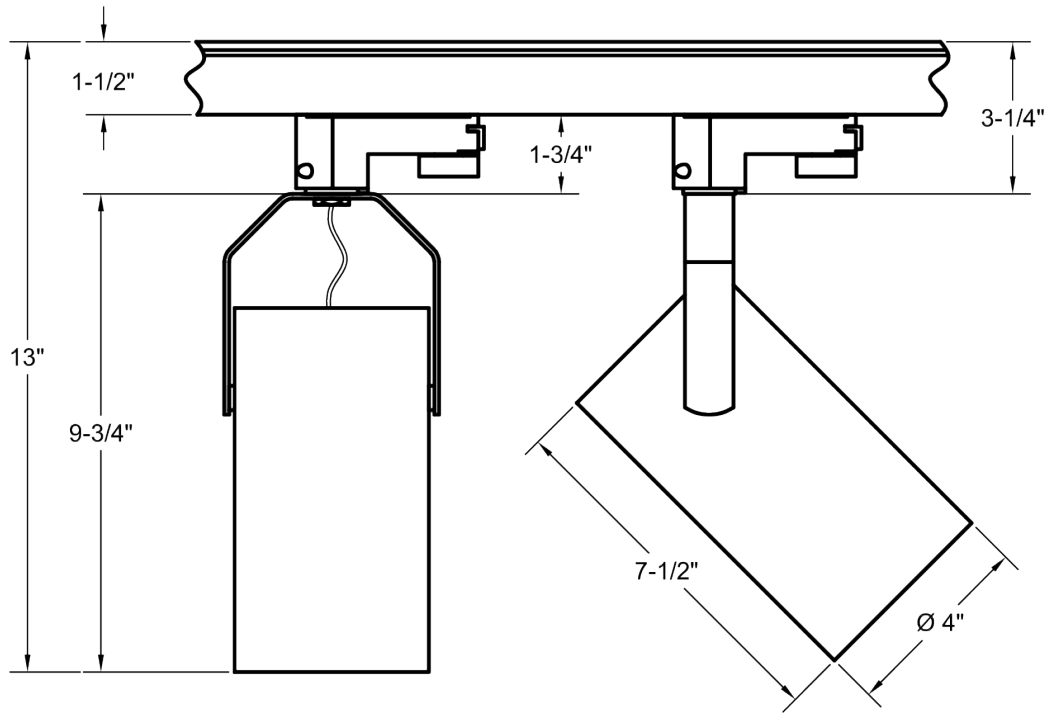

US1, TB8 OR CLAMP MOUNT WITH POWER CORD (NOT SHOWN) FOR CASAMBI WIRELESS OR DMX. TWO RJ45 JACKS PROVIDED WITH DMX VERSION ONLY

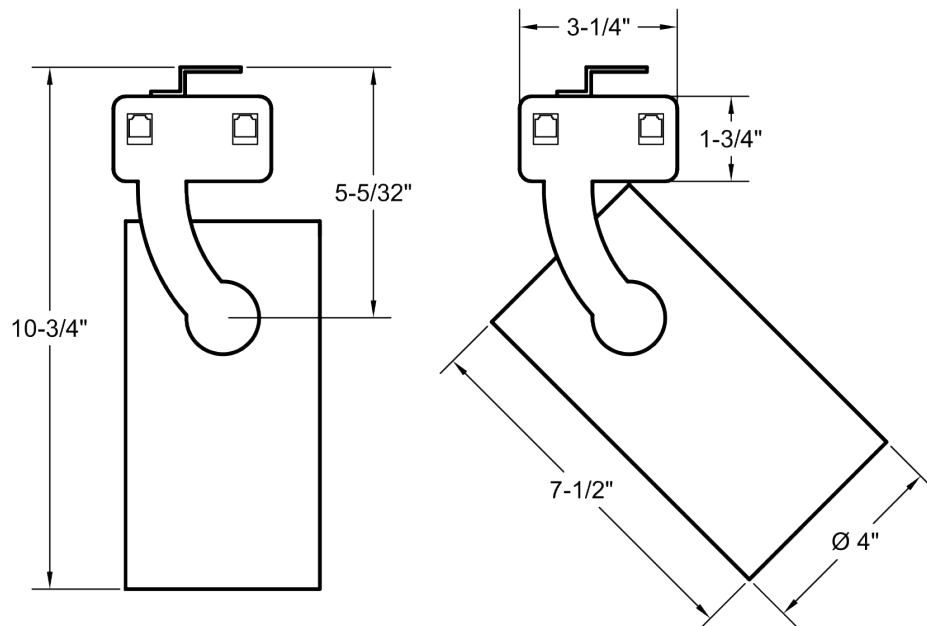

ACT23 MOSAIC FLOOD

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



MOUNTING OPTIONS

DT2 2-circuit track adapter for SpecTrac databus, 120V.

HDT2 2-circuit track adapter for SpecTrac databus, 277V.

LP2 Low profile 2-circuit track adapter for SpecTrack databus. 120V.

DXTC Canopy mount with terminal block for DMX.

GAC Track adapter for 120V global pulse track.

CM4 Canopy mount (Casambi Wireless only).

US1 6 5/8" x 1 1/2" Unistrut Adapter
(Casambi Wireless only).

TB8 8" x 8" Portable table base for floor and table use
(Casambi Wireless only).

MC Light duty pipe clamp for small fixtures. For pipes up
to 1 5/16" O.D. (Casambi Wireless only).

MN Medium duty pipe clamp for small to large fixtures.
For pipes up to 2" O.D. (Casambi Wireless only).

PC9M Heavy duty pipe clamp for large, heavy fixtures.
For pipes up to 2" O.D. (Casambi Wireless only).

ACCESSORIES

BD20	Barndoor
LV22	Full Size Louver
XL22	Full Size X Baffle Louver
XH22	Full Size X Baffle Hood
HD22	Hood/Snoot
XCY-AH	Accessory Holder
LV18*	Honeycomb Louver
GF22-600*	5x50 Linear Lens
GF22-601*	Solite Softner
GF22-673*	50 x 50 Spread Lens
SC24	Safety Cable
HADAR70WF	Frosted Beam Accessory
HADAR70WA	Wall Wash Accessory

* XCY-AH Required

For Extension Wands, consult the factory.

NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



SPECIFY:

MODEL	FINISH	OPTICS
ACT23	B = Black W = White S = Silver CC = Custom Color	25 = 25° Degree 35 = 35° Degree 40 = 40° Degree 50 = 50° Degree 60 = 60° Degree ZO = 25° - 45° Zoom
MOUNTING OPTIONS		DIMMING
See Mounting Options for Ordering Codes		DX = DMX / RDM CS = Casambi Wireless

DMX PROFILES

DMX PROFILE	DMX CHANNEL	Ch1	Ch2	Ch3	Ch4	Ch5
RGBIK *	5	Red	Green	Blue	Intensity	CCT
RGB22	5	Red	Green	Blue	Warm White	Cool White
IKSH	4	Intensity	CCT	Saturation	Hue	
RGB-18K	4	Red	Green	Blue	1800K White	
RGB-22K	4	Red	Green	Blue	2200K White	
RGB-27K	4	Red	Green	Blue	2700K White	
RGB-30K	4	Red	Green	Blue	3000K White	
RGB-40K	4	Red	Green	Blue	4000K White	
RGB-65K	4	Red	Green	Blue	6500K White	

* Default

EXAMPLE: ACT23-B-60-DT2-DX

MODEL	FINISH	OPTICS	MOUNTING OPTIONS	DIMMING