



# HB5-RGBAW

7x15 RGBAW LED



5 Holt Drive,  
Stony Point, NY 10980  
845-947-3034  
info@tslight.com

Built to impress, the HB5-RGBAW offers phenomenal color mixing, advanced electronics, and a huge amount of light output all in a tiny package that will really get the crowd jumping! The HB5-RGBAW offers cutting-edge 5-in-1 LEDs, a rock solid super-cool aluminum casing with dual hanging brackets and secure grip locking knobs in a compact package. It weighs in at just 3.5 pounds and is only 4 x 5 x 5 inches (7.25 inches tall including the brackets).

The HB5-RGBAW puts out a ton of light from its 7x15-watt 5-in-1 LEDs, and features 4/5/9 or 10 user selectable DMX channel modes, which means it works great with any type of controller, including popular 4-channel controllers. The easy to use built-in 4-button LED control panel also allows total control over the fixture including master/slave settings, sound active mode, built-in programs, auto mode, custom color mixing, and user adjustable fade/strobe effects.

## Accessories

HB5BD	Barndoor
HB5SN	Hood
HB5D	40° Diffuser
CC18	Coiled Cord
SC-24	Safety Cable

## Extension Wands

SP 12	12" Stem
SP 18	18" Stem
SP 24	24" Stem
SP X	Custom Length

## Finish

B	Black
W	White



## Features

- 7x15W 5-in-1 LEDs 100,000 hours
- Beam Angle: 25 degree optics standard, 26 degree beam, 30 degree field
- Ultra smooth flicker-free 32-bit dimming
- 100-250VAC, 40-60 Hertz
- DMX-512 (Selectable 4/5/9/10 channel mode)
- 3-Pin XLR input and outputs
- Weight: 3.5 lbs.

## Lux Per Meter


	RGBAW	Red	Green	Blue	Amber	White
1M	11,490	2,600	2,710	2,920	1,280	3,460
2M	3,260	800	780	850	410	1,010

Specify: HB5-RGBAW - - -  
**MODEL NUMBER**      **FINISH**      **MOUNTING ( optional)**      **ACCESSORIES (optional)**  
 Example: HB5-RGBAW - -B - -MN - -HB5SBD


\*Specification sheets are subject to change without notice.

## Features

### RGBVW - 26° Beam

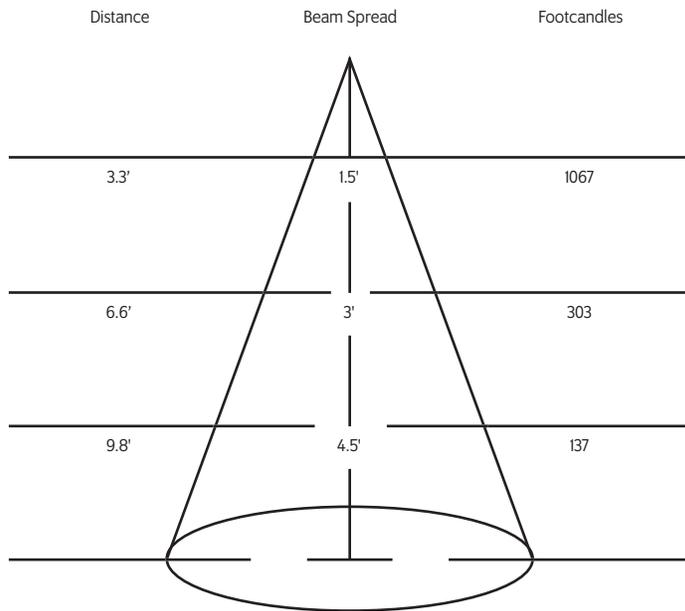


### Red - 26° Beam

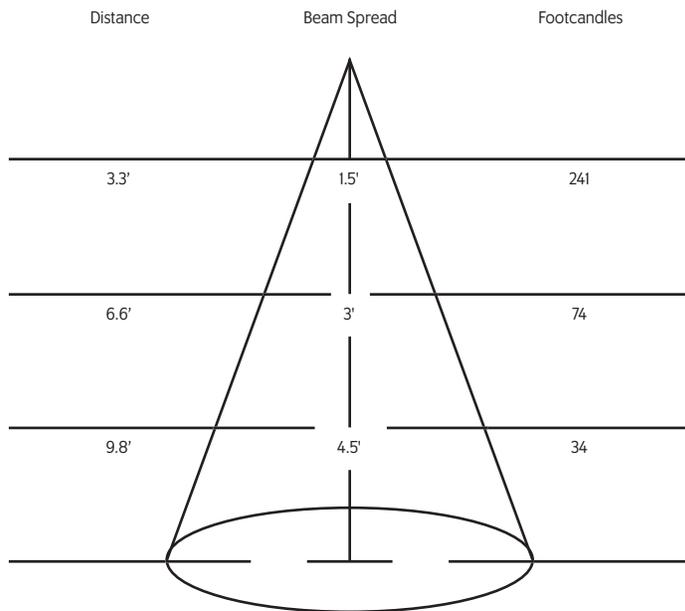


## Mounting Options


**STA** 2 circuit track adapter for Data Bus. Specification grade track. 120V.

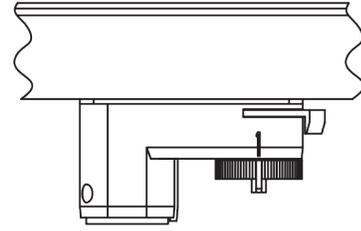


**CM4** Canopy mount.

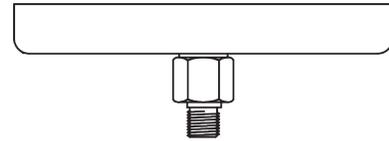

**US1** 6 5/8" x 1 1/2" Unistrut adapter.



**TB4** 6 1/4" Portable wall mount/table base floor, wall or table use.



**MC** Light duty pipe clamp for small fixtures. For pipes up to 1 5/16" O.D.

**MN** Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

**PC9M** Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.

