

# TW26R MULTIPLES

## TUNABLE WHITE RECESSED MULTIPLE

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED  
BY A NATIONALLY  
RECOGNIZED  
TESTING  
LABORATORY



The TW26R Multiples features a high CRI output, with tunable white from 1800K - 6500K. Interchangeable reflectors allow beam angles between 10° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

- 2800 Lumen Output
- RDM Values Available: DTW, INT-CCT, CH1-CH2, CH1-CH2-CH3 \*
- Tunable range: 1800K-6500K tunable white
- 94 - 97 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available
- DMX/RDM, 0-10V

\* See User Manual.

NUMBER OF LAMPS	TOTAL WATTAGE	LUMENS
TW26R-1	38W	2800
TW26R-2	76W	5600
TW26R-3	114W	8400
TW26R-4	152W	11200

### FEATURES

- Adjustable trim with torsion springs for ceilings up to 2" thick.
- Adjustable butterfly mounting brackets included (additional mounting hardware provided by others).
- Black, white and silver trims available - custom colors upon request.
- Blends into the ceiling and can be installed with or without trim.
- Each LED is individually mounted for pan and tilt.
- Each lamp can be individually controlled in 2, 3 & 4 light configurations.
- Accepts a variety of lenses and accessories.

### POWER

- Power Consumption: 38W per cell, 152W total
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

### OPTICS

- 10°, 20°, 40° or 60° field-changeable reflectors

### EMITTER 5-YEAR WARRANTY


The warranty on the LED Emitter used in this Times Square Lighting product shall have a five year warranty from the date of purchase.

# TW26R MULTIPLES

## TUNABLE WHITE RECESSED MULTIPLE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED  
BY A NATIONALLY  
RECOGNIZED  
TESTING  
LABORATORY

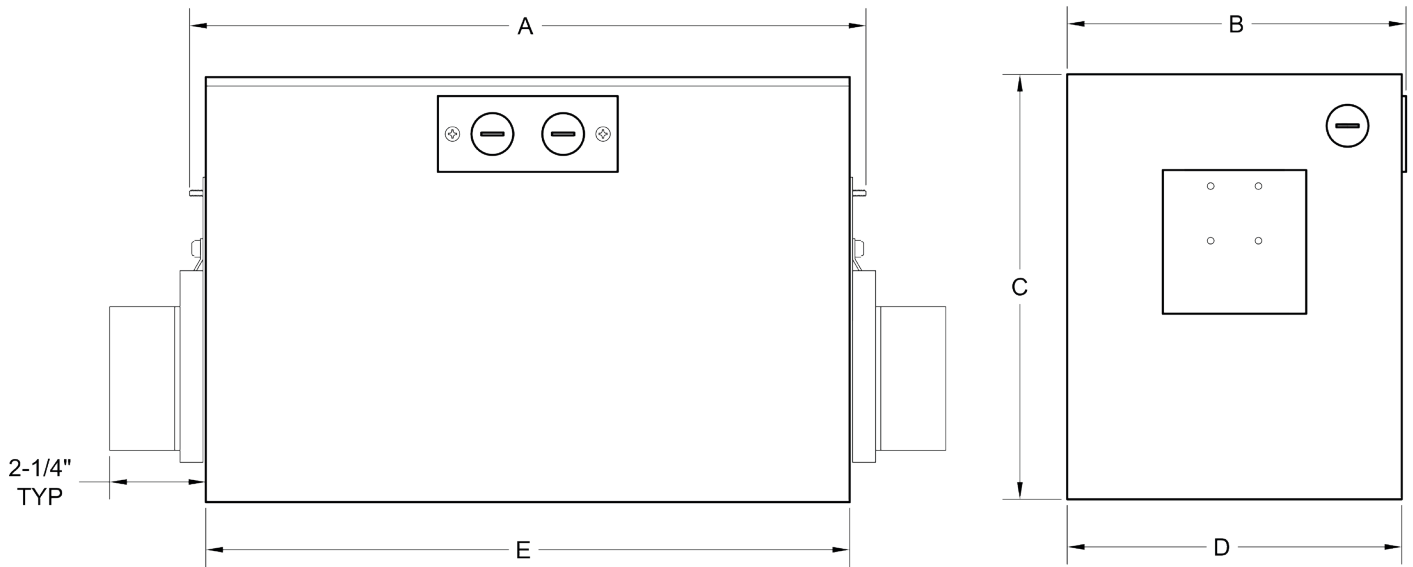

### CALIBRATED CCT SPECIFICATIONS

CCT [K]	TYPICAL CRI
1800 (min)	94
3000	96
3500	97
4000	96
6500 (max)	94









### NOTES ON DIMMING

Visit [tslight.com/resources](https://tslight.com/resources) or scan the QR Code.



**END VIEWS**

**SIDE VIEWS**

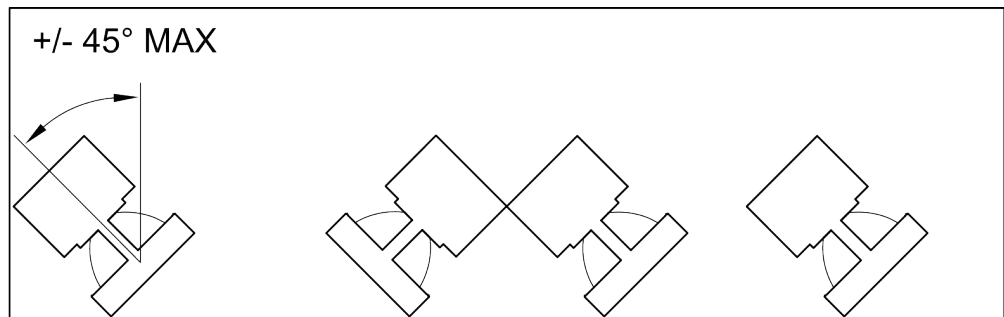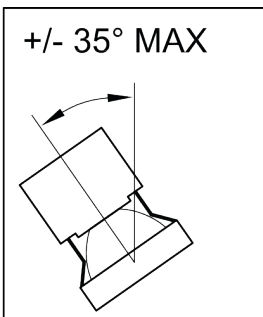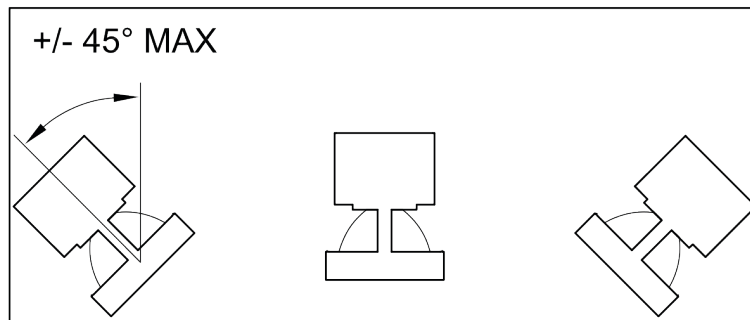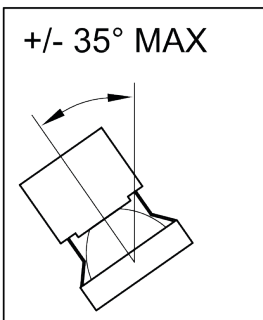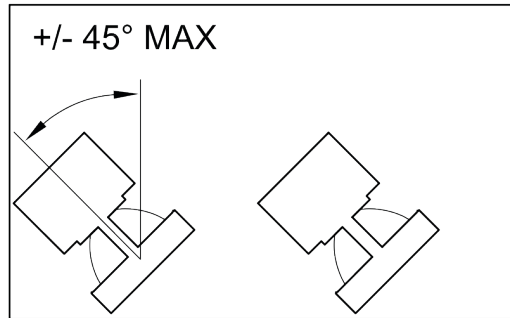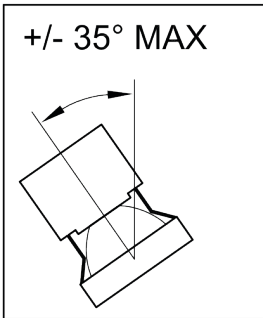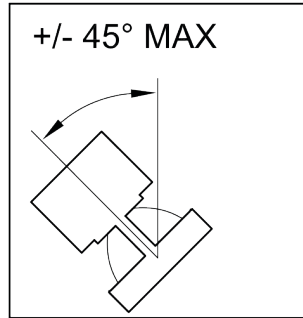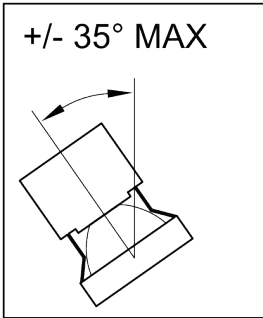

# TW26R MULTIPLES

## TUNABLE WHITE RECESSED MULTIPLE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED  
BY A NATIONALLY  
RECOGNIZED  
TESTING  
LABORATORY



MODEL NUMBER	LENGTH	WIDTH	HEIGHT	CEILING CUT-OUT	
	(A)	(B)	(C)	(D)	(E)
TW26R-1	8 - 1/2"	7 - 1/2"	9"	7 - 3/16"	8"
TW26R-2	14 - 1/2"	7 - 1/2"	9"	7 - 3/16"	14"
TW26R-3	20 - 3/8"	7 - 1/2"	9"	7 - 3/16"	20"
TW26R-4	26 - 1/4"	7 - 1/2"	9"	7 - 3/16"	25 - 3/4"

### ACCESSORIES

LV18*	Louver
DF22*	Dichroic Color Filter
GF22-600*	5°x50° Linear Lens
GF22-601*	Beam Softener
GF22-673*	50°x50° Spread Lens
X00517	Accessory Holder

\* X00517 Required, not compatible with 10° reflector option.



**1-LINEAR**  
CT23R-1



**2-LINEAR**  
CT23R-2



**3-LINEAR**  
CT23R-3



**4-LINEAR**  
CT23R-4

**SPECIFY:**

MODEL	NUMBER OF LAMPS	INSIDE FINISH	TRIM FINISH
TW26R	1 = 1-Linear 2 = 2-Linear 3 = 3-Linear 4 = 4-Linear	B = Black W = White S = Silver CC = Custom Color	B = Black W = White S = Silver CC = Custom Color
GIMBLE FINISH	OPTICS	DIMMING	COLOR TEMPERATURE *
B = Black W = White S = Silver CC = Custom Color	10 = 10° 20 = 20° 40 = 40° 60 = 60°	DX = DMX / RDM CS = Casambi Wireless 010 = 0-10V	27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K 65 = 6500K

\* Fixtures can be pre-programmed to static white with 1-channel DMX for non-tunable white applications.

**ORDERING INFORMATION**

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

**EXAMPLE:** TW26R-2-B-B-B-40-DX-27

MODEL	NUMBER OF CELLS	INSIDE FINISH	TRIM FINISH	GIMBLE FINISH	OPTICS	DIMMING	COLOR TEMPERATURE
TW26R							