

C323 MOSAIC INKY

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The Mosaic Inky combines tunable color from 1800K to 6500K with high CRI output. Rich blues, ambers, reds, violets and greens can be added in gradients or can completely saturate the output of the light. Interchangeable reflectors allow beam angles between 25° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

FEATURES

- 2000 Lumen Output
- 5 DMX Channels
- Color Tuning: RGB+ Intensity+ CCT
- Tunable range: 1800K-6500K tunable white
- 84 - 95 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life

POWER

- Power Consumption: 31W
- Max. Operating Temp: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

OPTICS

- 25°, 35°, 40°, 50°, and 60° field-changeable reflectors

WEIGHT

- 2 lbs.

CALIBRATED CCT SPECIFICATIONS



CCT [K]	TYPICAL CRI
1800 (min)	90
2700	93
3000	95
3500	95
4000	93
6500 (max)	84

C323 MOSAIC INKY

COLOR MIXING - TUNABLE WHITE

MANUFACTURED IN THE UNITED STATES - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

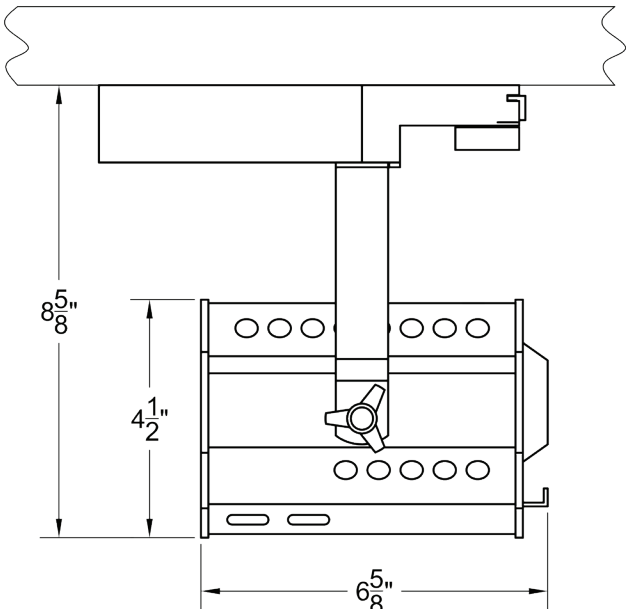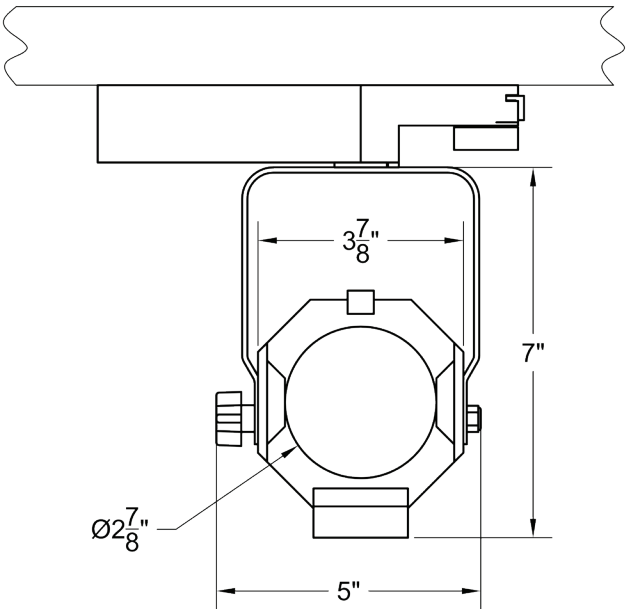

MOUNTING OPTIONS

N8: for DT2 2-circuit track adapter for SpecTrac databus, 120V.

N9: for HDT2 2-circuit track adapter for SpecTrac databus, 227V.

NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



ACCESSORIES

BD5	Barndoor
LV22	Louver
C3S	Hood/Snoot
C3CF	Lens Holder
OF22-9101*	Smoothing Frost Filter
GF22-600*	5 x 50 Linear Lens
GF22-601*	Solite Softner
GF22-673*	50 x 50 Spread Lens
SC24	Safety Cable
HADAR70WF	Frosted Beam Accessory
HADAR70WA	Wall Wash Accessory

* C3CF Required

For Extension Wands, consult the factory.

SPECIFY:

MODEL	FINISH	OPTICS
C323	B = Black W = White S = Silver CC = Custom Color	25 = 25° Degree 35 = 35° Degree 40 = 40° Degree 50 = 50° Degree 60 = 60° Degree ZO = 25° - 45° Zoom
MOUNTING OPTIONS		DIMMING
See Mounting Options for Ordering Codes		DX = DMX / RDM

DMX PROFILES

DMX PROFILE	DMX CHANNEL	Ch1	Ch2	Ch3	Ch4	Ch5
RGBIK *	5	Red	Green	Blue	Intensity	CCT
RGB22	5	Red	Green	Blue	Warm White	Cool White
IKSH	4	Intensity	CCT	Saturation	Hue	
RGB-18K	4	Red	Green	Blue	1800K White	
RGB-22K	4	Red	Green	Blue	2200K White	
RGB-27K	4	Red	Green	Blue	2700K White	
RGB-30K	4	Red	Green	Blue	3000K White	
RGB-40K	4	Red	Green	Blue	4000K White	
RGB-65K	4	Red	Green	Blue	6500K White	

* Default

EXAMPLE: C323-B-60-N8-DX

MODEL	FINISH	OPTICS	MOUNTING OPTIONS	DIMMING
C323				