

KL FRESNEL FC

80W RGBMA LED 4" FRESNEL W/ ZOOM



The KL FRESNEL 4 FC™ is a full-color-spectrum LED fixture that provides high output, precise color temperature control, full-spectrum color rendering, and even wash coverage. Optimized for the tunable white light requirements of Film and Television, it is an ideal key and fill light source for many situations requiring outstanding performance and color quality, while offering a wide array of rich saturated colors and subtle pastels.

The KL FRESNEL 4 FC incorporates a highly efficient 5-in-1 (RGBMA) LED engine with a manual zoom range of 10° to 40°. The incorporation of Elation's ColourTune Technology ensures outstanding color rendering quality, precise CCT control, and Fidelity Selection Options. Remotely adjustable LED refresh frequency makes this unit the perfect choice for today's fast-paced production environments. Rugged

and portable, the fixture can be mounted on a stand or suspended using any standard clamp. It is fully self-contained without the need for an external power supply and offers locking power pass-through for easy linking of multiple units.

The KL FRESNEL 4 FC can be operated through industry-standard DMX protocols and has full RDM support. In addition, it offers manual access using the included encoders and display, providing instant control of Intensity, Color temperature, Green shift, and other important settings. The display and encoders are conveniently positioned at the bottom side of the fixture to ensure unobstructed access while mounted on a stand.

FEATURES

- 80W RGBMA LED Engine
- ColourTune Technology Software Integration
- 2226 Total Fixture Lumen Output (Sphere)
- 10° to 42° Wide Manual Zoom
- Stand-Alone control with Encoder and LED Display
- Smooth 16-bit Selectable Dimming Modes and Curves
- LED Refresh Rate Adjustment
- Flicker Free Operation for TV and FILM
- RDM (Remote Device Management)
- 8-leaf Barn Doors and Gel Frame Included

SIZE / WEIGHT

- Length: 7.5"
- Width: 12.3"
- Vertical Height: 8.8"
- Weight: 8.4 lbs.

CONTROL / CONNECTIONS

- 9 DMX Channel Modes (1, 2, 6, 11, 18, 19, 9, 14, 15)
- Manual and DMX Controlled Dimmer, Color
- Direct Access Encoder
- 4 Button Control Panel, LED Display
- RDM (Remote Device Management)
- 3/5pin DMX and IP65 Locking Power In / Out Connection

ELECTRICAL / THERMAL

- AC 100-240V - 50/60Hz
- 85W Max Power Consumption
- Power Thru Capacity: @110V: 15 units; @240V: 29 units
- 5°F to 113°F (-15°C to 45°C)
- BTU/hr (+/- 10%) 289.85

SOURCE

- 80W 6000K RGBMA LED Engine
- 50,000 Hour Average LED Life *

* May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

KL FRESNEL FC

80W RGBMA LED 4" FRESNEL W/ ZOOM

COLOR

- High Brightness and High Fidelity Output Options
- RGBMA Color Array
- CMY Emulation
- 16 bit Fully Variable CCT 2400K - 8500K
- Green/Magenta Shift
- Dim-to-Warm Fade
- Virtual Gel Swatch Book

EFFECTS

- Manual Zoom
- Electronic Dimmer and Strobe
- Variable 16-bit Dimming Modes and Curves

MOUNTING OPTIONS

MNB	Clamp for pipe up to 2" OD
CM4	Canopy for mounting to J-box
US1	Unistrut mount
DT2	Track adapter (2 Required)

PHOTOMETRIC DATA


- Total Lumen Output: 2226 (Integrating Sphere)
- CRI: 92.2
- Zoom Range: 10° - 40°
- Beam Angle: 10° - 42.6°
- Field Angle: 17.4° - 68.6°

APPROVALS

- CE
- cETLus
- IP20
- FCC
- UKCA

ACCESSORIES

WINT-DMX	DMX transmitter 1000 ft. range (line of sight)
WINR-DMX	DMX receiver 1000 ft. range (line of sight)

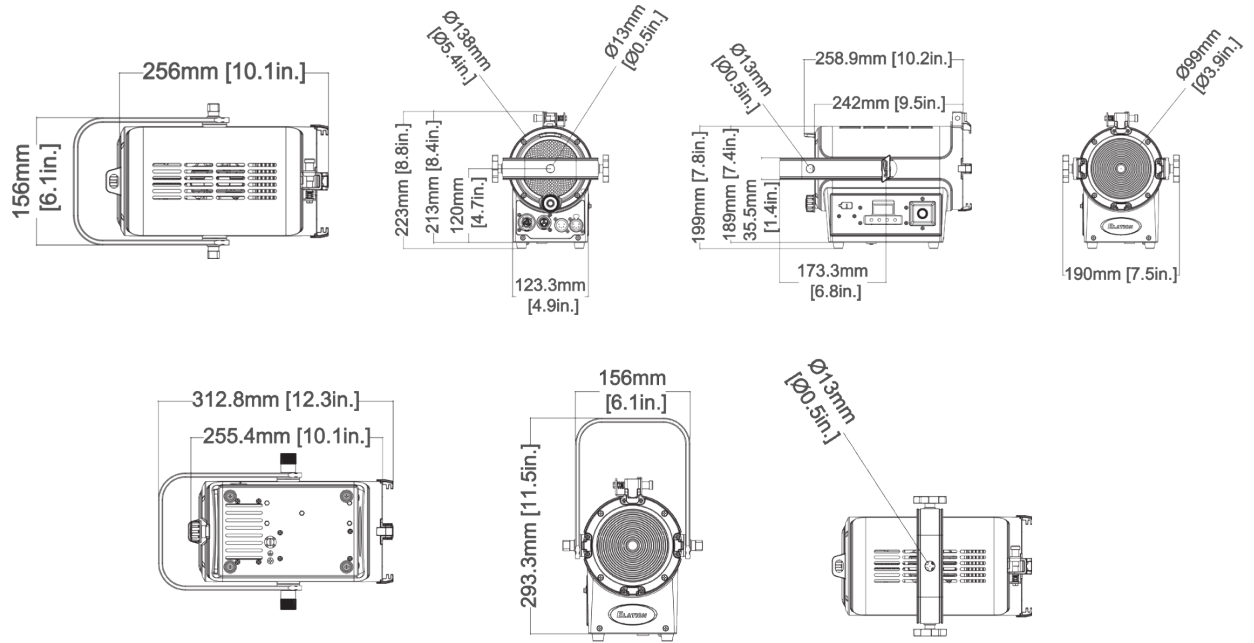

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	