

WW SERIES

800 - 5000 LUMEN LED WALL WASH

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY



The **WW Series** features an asymmetrical reflector that provides even field of illumination. This distribution of light from ceiling to floor hides imperfections in the wall and smoothly eliminates shadows, adding a feeling of depth to any room.

The WW has an available high CRI option which is ideally suited for lighting artwork. Numerous lumen outputs are available, ranging between 800 and 5000 lumens. A variety of dimming options are available, including phase dimming, 0-10V and IP (integral potentiometer) dimming.

The WW Series is available in standard black, white and silver finishes. Custom colors are available upon request.

CRI	LUMENS	WATTS	LUMENS PER WATT
80	1000	5.7	175
80	2000	11.6	172
80	2800	16.4	171
80	3700	23	161
80	5000	35	143
92	800	5.7	140
92	1600	11.6	138
92	2200	16.4	134
92	3000	23	130
92	4100	35	117

DIMMING

- Trailing edge (ELV): 120V / 277V
- Leading edge (Triac): 120V only
- 0-10V: 120V only (ControlTrac),
- 120-277V otherwise
- IP (Integral Pot) dimming available
- Lutron ecosystem premier driver available, featuring dimming to 0.1% and soft on/soft off incandescent like dimming. Only available on fixtures 20 watts or less.

CONSTRUCTION

- Steel & aluminum housing with black, white or silver finish
- Weight: 3 lbs.
- Asymmetrical reflector

ELECTRICAL

- Integral electronic driver
- 120-277V, 50/60Hz
- Meets FCC 47 CFR Part 15/18 Requirements



WW SERIES

800 - 5000 LUMEN LED WALL WASH



MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

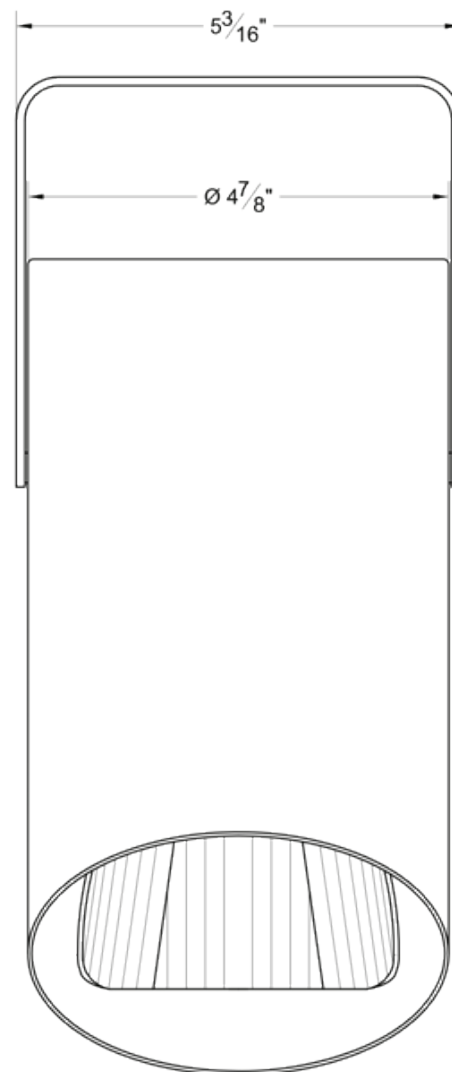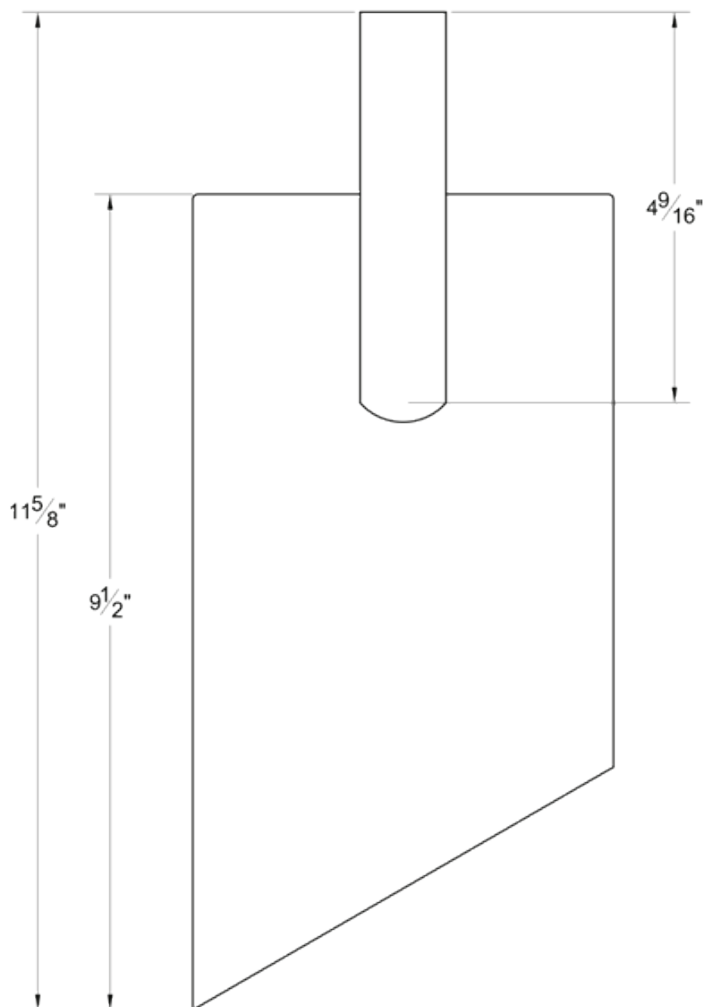

PHOTOMETRIC DATA



<div> <div>4 FT</div> <div>3 FT</div> <div>2 FT</div> </div>			
FC	FC	FC	FT
-	113	270	2
55	144	310	3
63	151	268	4
68	145	230	5
70	137	182	6
67	120	148	7
63	102	120	8
59	85	95	9
49	71	76	10
46	59	62	11
42	50	51	12

<div> <div>4 FT</div> <div>3 FT</div> <div>2 FT</div> </div>			
FC	FC	FC	FT
-	87	202	2
41	110	226	3
46	108	204	4
49	104	175	5
48	95	139	6
45	84	110	7
44	72	86	8
40	61	70	9
37	52	56	10
33	43	51	11
30	37	45	12

WW SERIES

800 - 5000 LUMEN LED WALL WASH

MANUFACTURED IN THE UNITED STATES - IBEW



PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

MOUNTING OPTIONS

DT2 2-circuit track adapter for SpecTrack databus. 120V.

HDT2 2-circuit track adapter for SpecTrack databus. 277V.

T1 Track Adapter for commercial grade 1 & 2 circuit track. 120V. For use with larger, heavier fixtures.

TA2 Track adapter for G-Series specification grade 2-circuit track. 120V.

HTA2 Track adapter for G-Series specification grade 2-circuit track. 277V.

TA3 Track adapter for G-Series specification grade 3-circuit track. 120V.

CM4 Canopy Mount

US1 6-5/8" x 1-1/2" Unistrut Adapter

TB8 8" x 8" Portable table base for floor and table use

MC Light duty pipe clamp for small fixtures. For pipes up to 1-5/16" O.D.

MN Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

PC9M Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.

ACCESSORIES

CC18 Coiled Cord
SC-24 Safety Cable

EXTENSION WANDS

SP 12 12" Stem
SP 18 18" Stem
SP 24 24" Stem
SP X Custom Length

NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



SPECIFY:

MODEL	LUMENS	CRI
WW	8 = 800 * 10 = 1000 ** 16 = 1600 * 20 = 2000 ** 22 = 2200 * 28 = 2800 ** 30 = 3000 * 37 = 3700 ** 41 = 4100 * 50 = 5000 **	80 92 98
COLOR TEMPERATURE	FINISH	VOLTAGE
27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 57 = 5700K **	B = Black W = White S = Silver CC = Custom Color	120 240 277
MOUNTING	DIMMING †	ACCESSORIES
See Mounting Options for Ordering Codes	TE = Trailing Edge *** LE = Leading Edge (120V Only) 010 = 0-10V IP = Integral Pot †† ECP = Ecosystem premier 0.1% dim	See Accessory Options for Ordering Codes

Maximum Ambient Temperature: 35°C
 Maximum Operating Angle: 45° from vertical

* 92 CRI Only
 ** 80 CRI Only
 *** Not available with 800 or 1000 lumen fixtures @ 277V

† See "Notes on Dimming"
 †† Not available with 800, 1000, 3000 or 4100 lumen fixtures

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: WW20-92-27-B-120-T1-IP-CC18

MODEL	LUMENS	CRI	COLOR TEMPERATURE	FINISH	VOLTAGE	MOUNTING	DIMMING	ACCESSORIES
WW								