



MC70H

70W PAR38



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

The MC70H is a great fixture for display windows, or any high luminance area. Accepting 70-watt PAR38 metal halide lamps, this unit produces very little heat with more than half the wattage consumption of a standard halogen lamp. Alter the beam spread by adding louvers, barndoors, hoods and filters to its accessory-retaining clips (not shown).


The MC70H also features an electronic horizontal ballast and a hinged front that opens for easy lamp replacement. Available in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

Manufactured in the USA - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

Features

- 120 and 277-volt available
- Accepts 70-watt PAR38 metal halide lamps
- Energy efficient
- Long lamp life
- Numerous mounting options and accessories

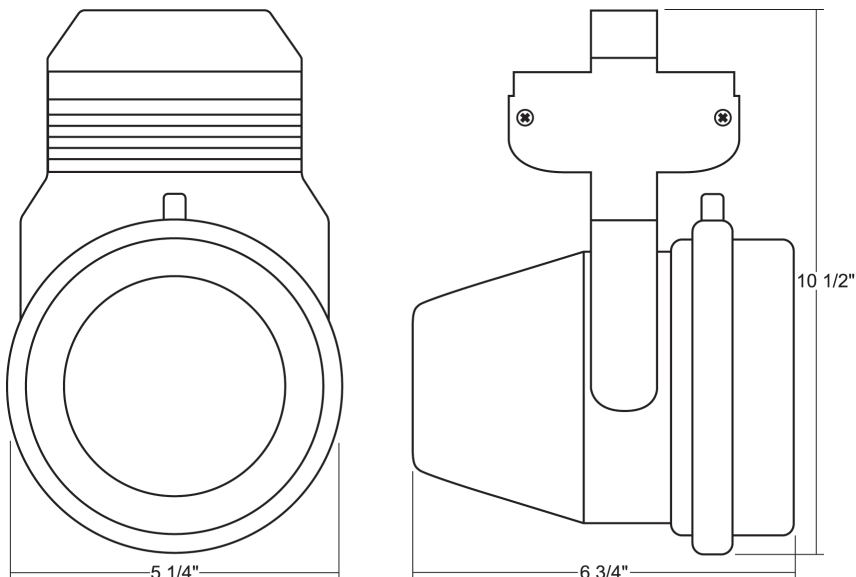

Lamp Types

CDM70/PAR38/SP/3K	70W; 10000Hrs; 15° Beam; 50000 CBCP; 4800 Lumens; 82 CRI; 3000°K Color Temp
CDM70/PAR38/FL/3K	70W; 10000Hrs; 25° Beam; 18000 CBCP; 4800 Lumens; 82 CRI; 3000°K Color Temp
CDM70/PAR38/WFL/3K	70W; 10000Hrs; 60° Beam; 5000 CBCP; 4800 Lumens; 82 CRI; 3000°K Color Temp

Ordering Matrix

Model	Finish	Mounting	Accessories
MC70H	B = Black W = White S = Silver CC = Custom Color	See Mounting Options	See Accessory Options


Example: MC70H-B-T1-LV7

MC70H-_____ - _____ - _____


*Specification sheets are subject to change without notice.

Photometric Data

CDM70/PAR38/SP/3K 15°

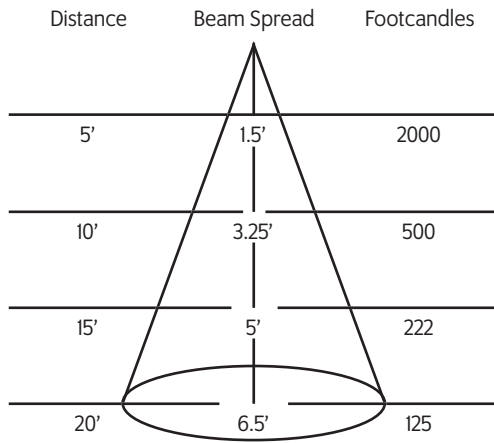

CDM70/PAR38/FL/3K 25°

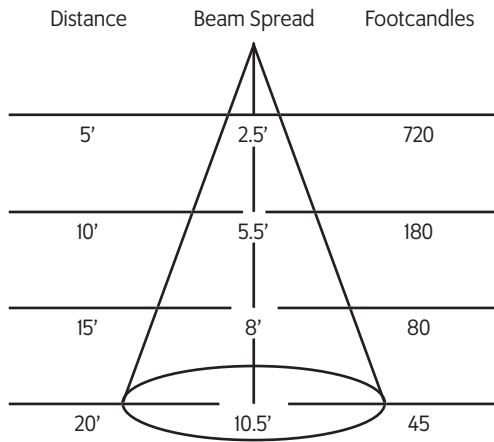

Mounting Options

T1

Track adapter for commercial grade 1 and 2-circuit track.

TA1

Track adapter for E-Series specification grade 1-circuit track.

TE2

Track adapter for E-Series specification grade 2-circuit track.

TA2

Track adapter for G-Series specification grade 2-circuit track.

HTA2

Track adapter for G-Series specification grade 2-circuit 277-volt track.

TA3

Track adapter for G-Series specification grade 3-circuit track.

US1

Unistrut adapter.

MN

Medium duty pipe clamp for pipes up to 2" O.D.

PC9M

Heavy duty pipe clamp for pipes up to 2" O.D.

CM4

6" Canopy for permanent mounting on standard 4" octagonal outlet boxes.

TB8

8" x 8" Portable table base for floor or table use.

Light Blocking Screens

Stainless steel screens used singly or in combinations to block transmitted light without changing color temperature.

LBS8-20	20% Light Blocking
LBS8-30	30% Light Blocking
LBS8-40	40% Light Blocking

Accessories

LV7

Louwer

XL7

Cross Baffle Louwer

BD7A

Barndoor

HD7

Hood

XH7

Cross Baffle Hood

SH7

Sparkle Hood

GF8

Glass Color Filter

DF8

Dichroic Color Filter

GF8-600

5°x50° Linear Lens

GF8-601

Beam Softener

GF8-673

50°x50° Spread Lens

GF8-702

UV Blocking Filter

CCI8

Coiled Cord

SC-24

Safety Cable

DM

Integral Dimmer

WL

Wrench Locking

Extension Wands

SP 12

12" Stem

SP 18

18" Stem

SP 24

24" Stem

SP X

Custom Length

Finish

B

Black

W

White

S

Silver

CC

Custom Color