

ACT11S MOSAIC SPOT

1000 LUMEN RGB TUNABLE WHITE SPOT

MANUFACTURED IN THE UNITED STATES - IBEW



The **Mosaic Spot** features high CRI tunable white and RGB color-mixing in one compact, high-performance luminaire. Built around a new 9mm LES module, it delivers exceptional optical precision, achieving a tight 14° spot. A wide selection of beam spreads, including a 15-44 degree zoom are also available.

The ACT11S seamlessly transitions from clean, accurate white light to rich, saturated color, making it ideal for museums, retail, hospitality, and immersive environments. Its clean form factor and precision optics make the Mosaic Spot a powerful tool for accent lighting key focal points with clarity and visual impact.

FEATURES

- 1000 Lumen Output
- 5 DMX Channels
- Color Tuning: RGB+ Intensity+ CCT
- Tunable Range: 1800K-6500K tunable white
- 84 - 95 CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- Casambi Available
- Fanless (silent) operation

POWER

- Power Consumption: 15W
- Maximum Operating Temperature: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

OPTICS

- 10°, 25°, 30° 40° 50° or 15°-44° Zoom Interchangeable Optics

WEIGHT

- 2 lbs.

CALIBRATED CCT SPECIFICATIONS

CCT [K]	TYPICAL CRI
1800 (min)	90
2700	93
3000	95
3500	95
4000	93
6500 (max)	84


ACT11S MOSAIC SPOT

1000 LUMEN RGB TUNABLE WHITE SPOT


MANUFACTURED IN THE UNITED STATES - IBEW




TRACK MOUNT

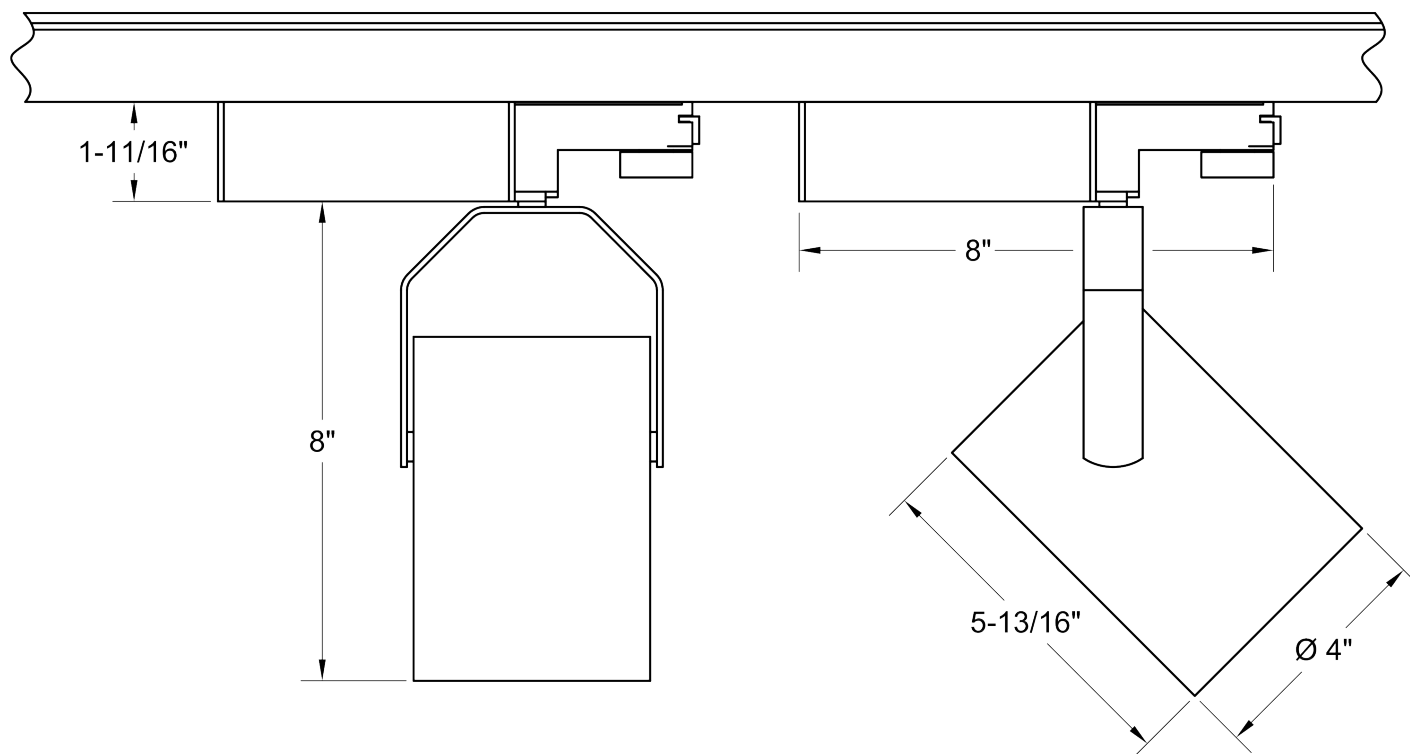

DXTC - CANOPY MOUNT WITH TERMINAL BLOCK FOR DMX

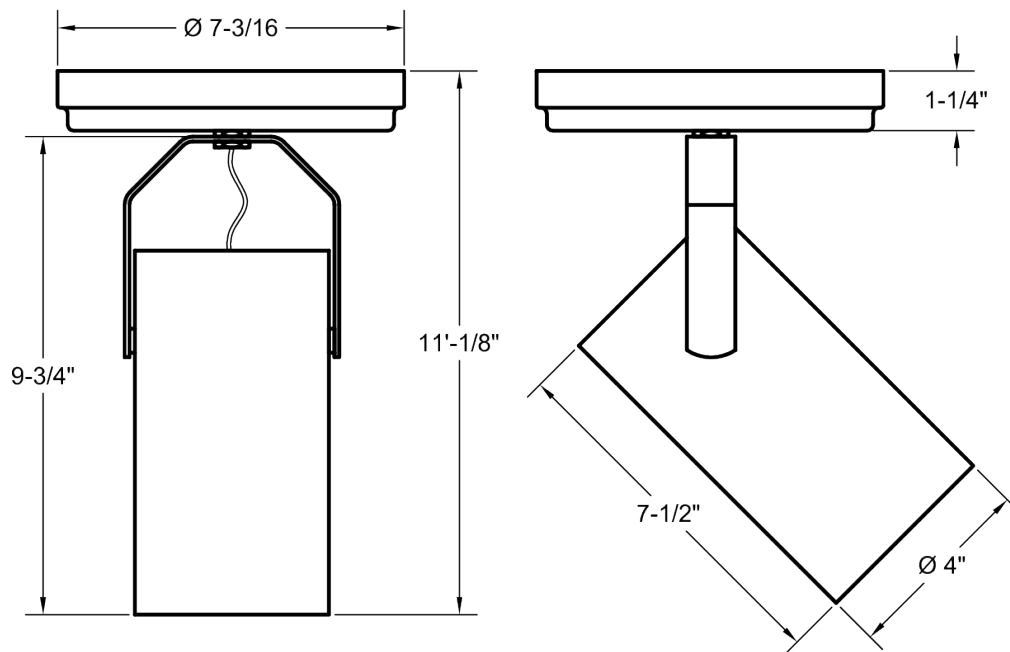

CM4 CANOPY MOUNT FOR CASAMBI WIRELESS

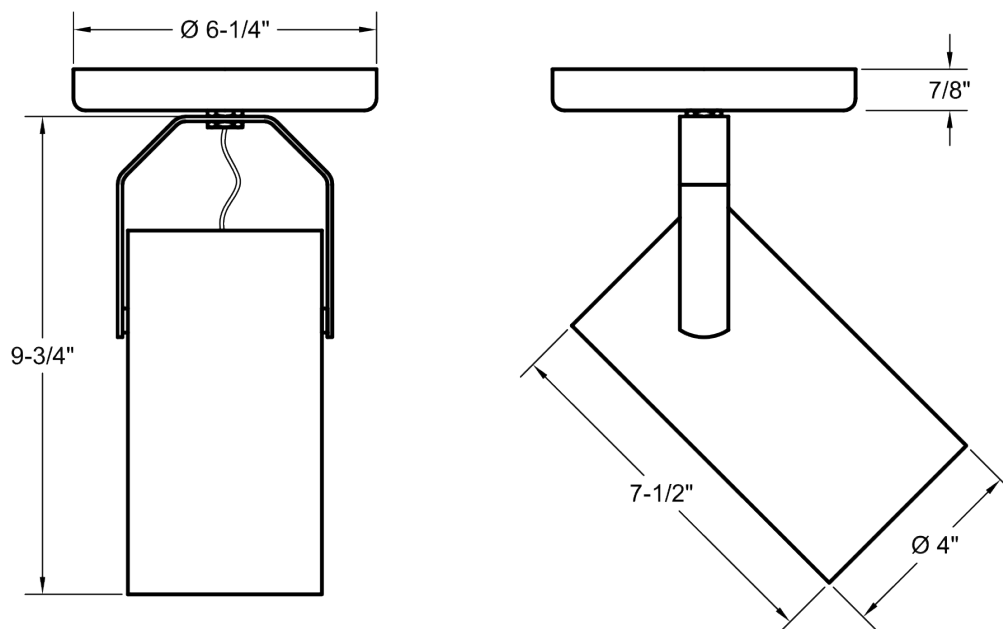

ACT11S MOSAIC SPOT

1000 LUMEN RGB TUNABLE WHITE SPOT

MANUFACTURED IN THE UNITED STATES - IBEW



MOUNTING OPTIONS	ACCESSORIES	
DT2 2-circuit track adapter for SpecTrac databus, 120V.	BD20	Barndoor
HDT2 2-circuit track adapter for SpecTrac databus, 277V.	LV22	Full Size Louver
DXTC Canopy mount with terminal block for DMX.	XL22	Full Size X Baffle Louver
CM4 Canopy mount (Casambi Wireless only).	XH22	Full Size X Baffle Hood
	HD22	Hood/Snoot
	XCY-AH	Accessory Holder
	LV18*	Honeycomb Louver
	GF22-600*	5x50 Linear Lens
	GF22-601*	Solite Softner
	GF22-673*	50 x 50 Spread Lens
	SC24	Safety Cable
	HADAR70WF	Frosted Beam Accessory
	HADAR70WA	Wall Wash Accessory

NOTES ON DIMMING

Visit tslight.com/resources or scan the QR Code.



* XCY-AH Required

SPECIFY:

MODEL	FINISH	OPTICS
ACT11S	B = Black W = White S = Silver CC = Custom Color	10 = 10° 25 = 25° 30 = 30° 40 = 40° 50 = 50° ZO = 15°- 44° Zoom Optics
MOUNTING OPTIONS		DIMMING
See Mounting Options for Ordering Codes		DX = DMX / RDM CS = Casambi Wireless

ORDERING INFORMATION

PROJECT:	
LOCATION:	
QUANTITY:	
CONTACT:	
PHONE:	
EMAIL:	

EXAMPLE: ACT11S-B-25-DT2-DX

MODEL	FINISH	OPTICS	MOUNTING OPTIONS	DIMMING
ACT11S				