




Manufactured in the USA - IBEW

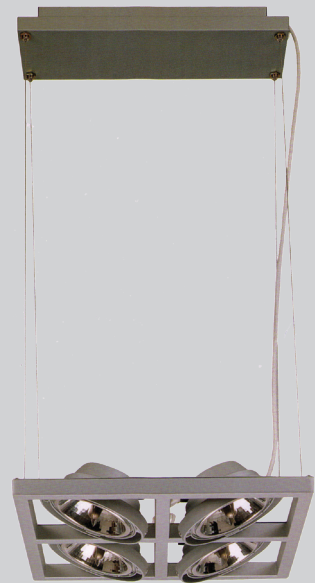

Features:

- Extruded aluminum frame
- Double gimbal ring
- Accessory holder
- Custom colors available
- **Standard wire length:** 59", field-adjustable to shorter lengths

LEDP-AR111

LED Pendant




5 Holt Drive,
Stony Point, NY 10980
845-947-3034
www.tsight.com

LEDP-AR111 is an extensive range of suspended adjustable multihead gimbal fixtures designed for retail and commercial display lighting. They are available in a number of different sizes and lamp combinations. Precision beam direction is achieved through the double gimbal mechanism, each ring being individually adjustable between 0-40°. The rings and housing are constructed from diecast aluminum and painted in a silver-grey polyester powder coat finish. AR111 halogen lamps offer exceptional beam control with a high light output.


By utilizing Soraa's Snap System, there are unlimited possibilities for customizing this fixture. Options include the ability to field change the beam angle (Beam Spreader Snap), alter color temperature (CTO Snap), or to add a louver. Color Snaps can be used to produce brilliant hues of any color that Rosco or Lee offer.

The Enhance Lens Snap can increase the vividness of warm colors (including red, orange and pink and greens). Aim Snaps can bend the beam to a maximum deflection angle of 20°. Linear Snap Lenses can alter the beam to act as a wall wash.


LEDP-AR111-S

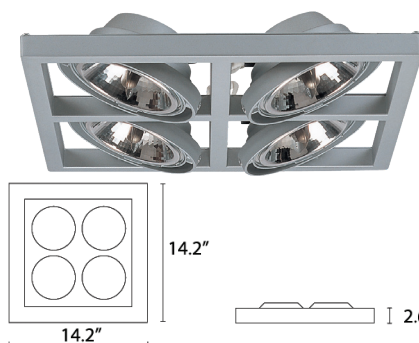


LEDP-AR111-2

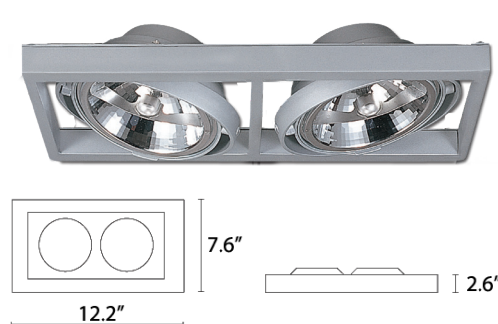

LEDP-AR111-3

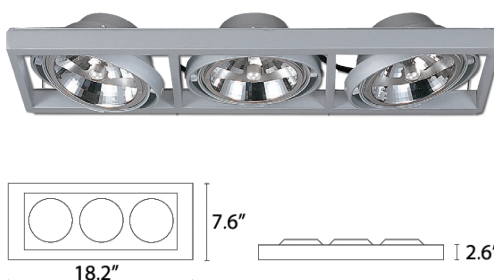

LEDP-AR111-4

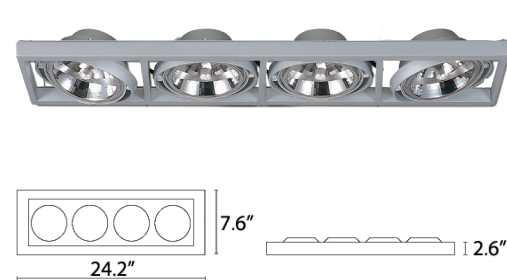

Lamp Type	Watts	CRI	Lumens*
Brilliant	12.5	85 (R9=0)	1280
Vivid	12.5	95 (R9=95)	1000

* Lumens vary depending on color temperature - results for 3000K lamp used above.

Ordering Matrix

Model	Configuration	CRI	Color Temperature	Wire Length	Color	Accessories
LEDP-AR111	S=Square (4 Lamps) 2 = 2 Lamps 3 = 3 Lamps 4 = Linear (4 Lamps)	95 85	27 = 2700K 30 = 3000K 40 = 4000K	Specify in Inches	S=Silver CC=Custom Color	See Accessory Options for Ordering Codes





* All fixtures sold with 9° beam angle lamps – use Beam Spreaders to achieve desired angle.

Example: LEDP-AR111-4-95-27-S-01145

LEDP-AR111- _____ - _____ - _____ - _____ - _____

* Specification sheets are subject to change without notice.

Photometric Data

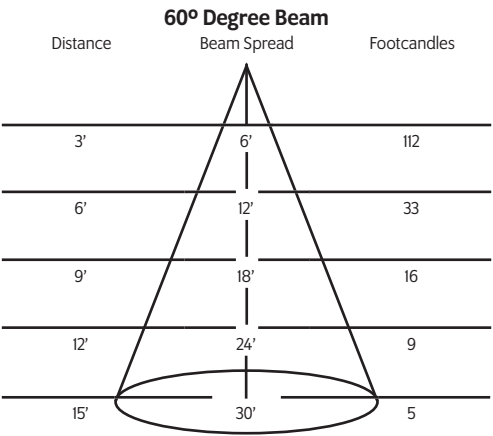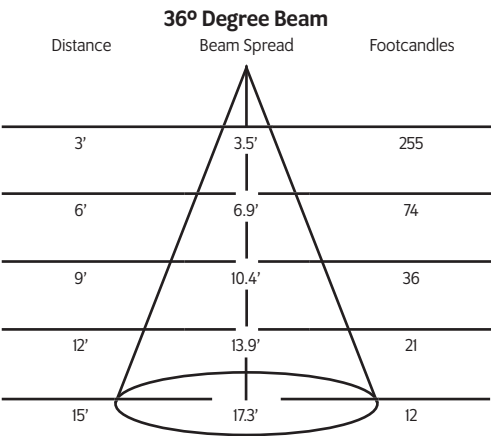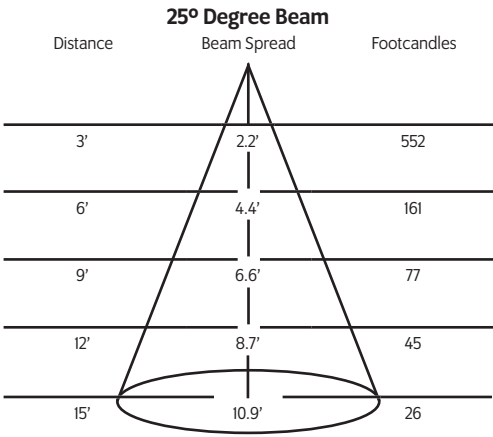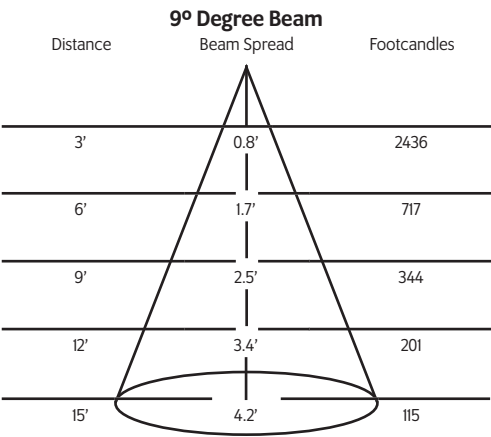

*Beam spread calculated based on field diameter.

Snap Accessories

- 01145 25° Beam Spreader Snap
- 01147 36° Beam Spreader Snap
- 01149 60° Beam Spreader Snap
- 01595 10°-36° Linear Snap
- 03261 10°-60° Linear Snap
- 01597 36°X36° Flat Top Snap
- 01151 40° Cutoff Louver
- 03257 20° Maximum Deflection Snap
- 01153 ¼ Color Temperature Shift Snap
- 01155 ½ Color Temperature Shift Snap
- 01157 ¾ Color Temperature Shift Snap
- 03283 Enhance Snap
- 02185-C Color Snap (Specify Color)

IES Files

Visit [tsight.com](https://www.tsight.com) to find comprehensive IES data.

Finish

- S Silver
- CC Custom Color