



# RECESSED MULTIPLES **New Construction • LED 15 Watt •**

Manufactured in the USA - IBEW

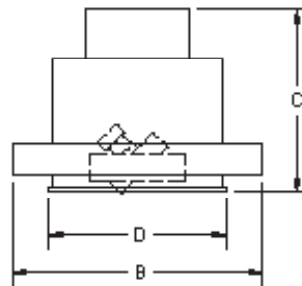

- Accepts 15-watt, 21° LED Engin
- Available in 1 to 4-light - linear, square and corner configurations
- Blends into the ceiling and can be installed with or without trim
- Each lamp is individually adjustable and specially designed lamp holders allow +/- 45° pan/tilt and full 360° rotation
- Easy front re-lamping
- Thermal protector
- Adjustable trim with torsion springs for ceilings up to 2" thick
- Adjustable butterfly mounting brackets included
- Fully enclosed wiring compartment
- Black, white and silver trims available - custom colors upon request
- 120 or 277-volt versions available

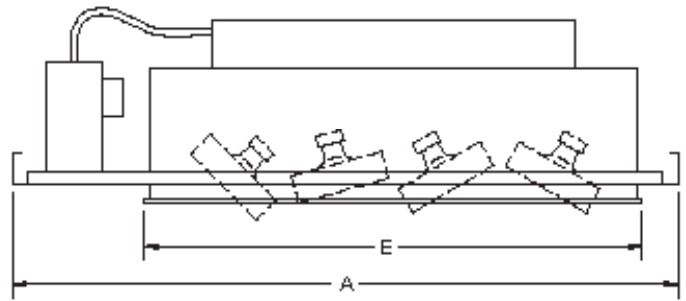

## LS21R 15 Watt, 21° LED Engin

Model #	Length	Width	Height	Ceiling Cut-Out	
	(A)	(B)	(C)	(D)	(E)
LS21R-1	11 1/8"	6 5/8"	8 3/4"	5"	7 1/8"
LS21R-2	16 5/8"	6 5/8"	8 3/4"	5"	12 5/8"
LS21R-3	21 5/8"	6 5/8"	8 3/4"	5"	18 1/8"
LS21R-4	25 5/8"	6 5/8"	8 3/4"	5"	23 5/8"
LS21R-4S	16 1/8"	13 7/8"	8 3/4"	10 1/4"	10 7/8"
LS21R-3L	15 7/8"	13 7/8"	8 3/4"	4 7/8" x 11 1/2"	11 1/2" x 4 7/8"

Model	# of Lamps	Color Temp (K)	Trim Finish
Spec: LS21R	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>LS21R</b>	<b>1</b> 1-Linear	<b>3200</b>	<b>B</b> Black
	<b>2</b> 2-Linear	<b>4200</b>	<b>W</b> White
	<b>3</b> 3-Linear		<b>S</b> Silver
	<b>4</b> 4-Linear		<b>CC</b> Custom
	<b>4S</b> 4-Square		
	<b>3L</b> 3-Corner		

Last updated 02/04/2010.

**1-Linear**  
LS21R-1



**2-Linear**  
LS21R-2



**3-Linear**  
LS21R-3




**4-Linear**  
LS21R-4



**4-Square**  
LS21R-4S



**3-Corner L**  
LS21R-3L

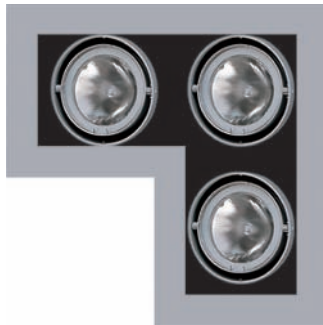


## Lamp Types

**LS21WW** 21° Narrow Flood, 3200K color temp, 80 CRI, 2000 MBCP

**LS21NW** 21° Narrow Flood, 4100K color temp, 75 CRI, 2400 MBCP

## Photometric Data

**LS21WW 21° NFL Warm White**

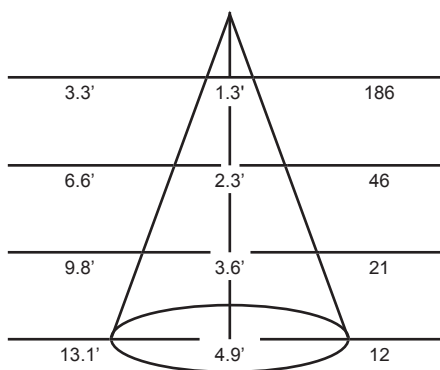

**LS21NW 21° NFL Neutral White**

